




CATALOGUE 2023



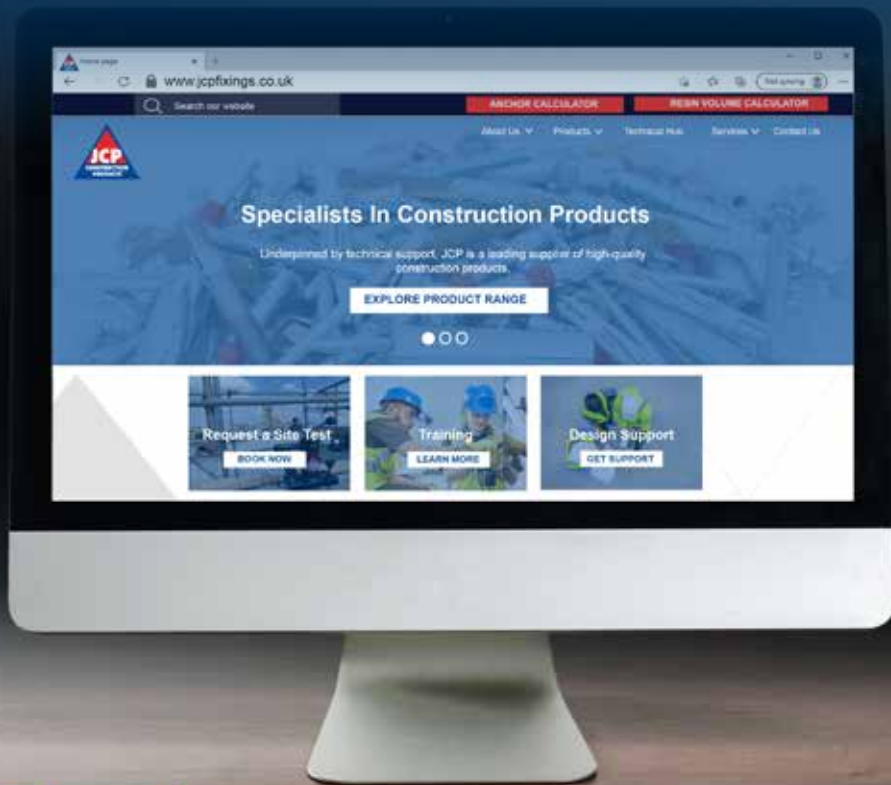

WELCOME TO JCP

OVER 20 YEARS OF FIXING EXPERTISE

JCP Construction Products is a leading supplier of high-quality construction fixings exclusively to the distributor. Established in 2001, we have grown to be a leading force in the UK fixings market, offering unrivalled technical support. The specialist fixings division of Owlett-Jaton, JCP supplies a wide range of anchoring products for use within the construction industry.



OUR COMMITMENT TO STOCK MEANS PRODUCTS ARE AVAILABLE, COMPETITIVELY PRICED, FOR NEXT-DAY DELIVERY THROUGHOUT MOST OF THE UK MAINLAND.

Supplying fixings to suit a variety of applications, JCP products come with full technical specification and include CE and ETA certified ranges. With quality and technical support underpinning JCP's approach, continual innovation ensures our range of products meets the ever-changing demands of the industry.

Our highly trained field representatives offer on-site testing throughout the UK, to demonstrate the suitability of our products.



FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS ACROSS THE MAJORITY OF THE UK MAINLAND.

NEW WEBSITE COMING SOON

We have been working hard to improve our online presence, and we are proud to announce the launch of a new JCP website.

The new website includes


- ✓ The full JCP range
- ✓ Clear yet familiar navigation that follows the JCP catalogue
- ✓ An improved and consistent structure of product information
- ✓ Links to the Owlett-Jaton website for distributor purchases
- ✓ Links to download the Anchor Calculation Program and Resin Calculator

Our goal with this new website is twofold.

Firstly, we want to provide our customers, the distributors, with a site that is easy to navigate and provides the technical information required to help them support their customers.

For end-users, the new site will significantly improve the ability to quickly access the technical information required and request technical help at the click of a button. Installers can easily download data sheets and view installation information on-site. Whilst arranging on-site support, design support, or training has never been as easy.

www.jcpfixings.co.uk

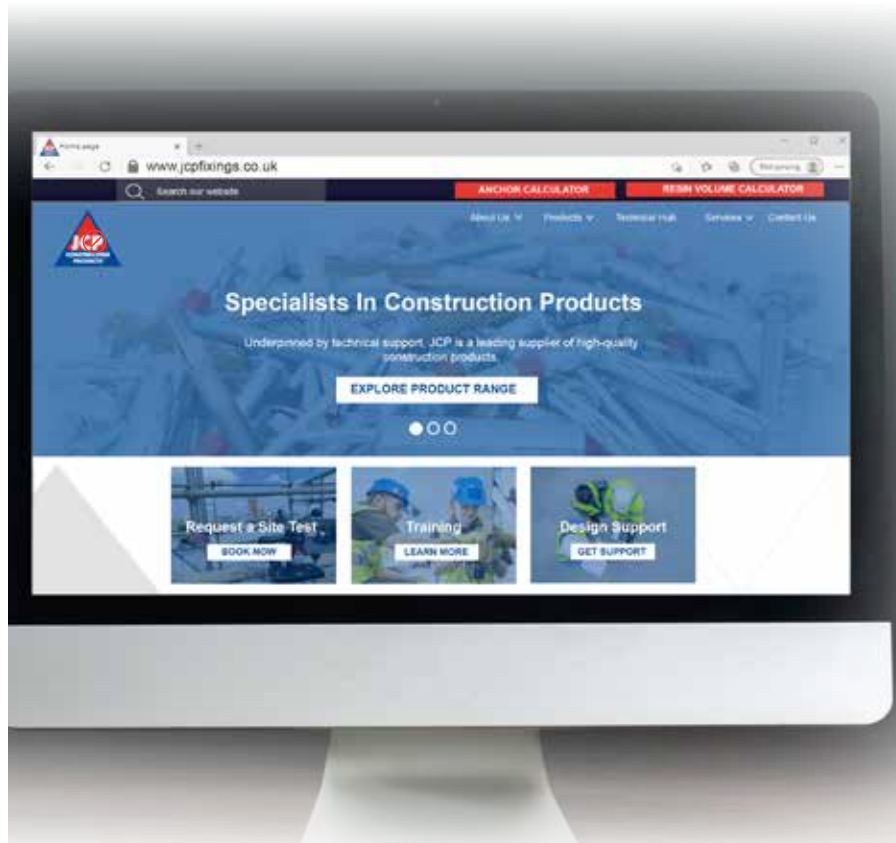


ANCHOR CALCULATION PROGRAM

The Anchor Calculation Program provides solutions for anchoring into both cracked and non-cracked concrete. The tool is designed for engineers, specifiers and architects to simplify specifying connections to surfaces such as floors, ceilings and walls, and takes into account loadings, spacing and edge distances. It includes 3D graphics, along with hole depth optimisation for chemical anchors.

Developed by our Technical Department, the JCP Anchor Specification Program also includes a rebar calculator, making it now a 'Suite' of programs. The two programs together, the ACP and Rebar calculator offer choice as to which one works best for the project being worked on.

It has the facility to calculate numerous configurations of fixings in different base plate geometry. Calculations are carried out in accordance with the current European Guide EOTA TR 029 for bonded anchors and EOTA ETAG-001 ANNEX C for mechanical anchors.

The software and database are updated regularly to ensure the program is compliant with any changes in legislation or industry standards.

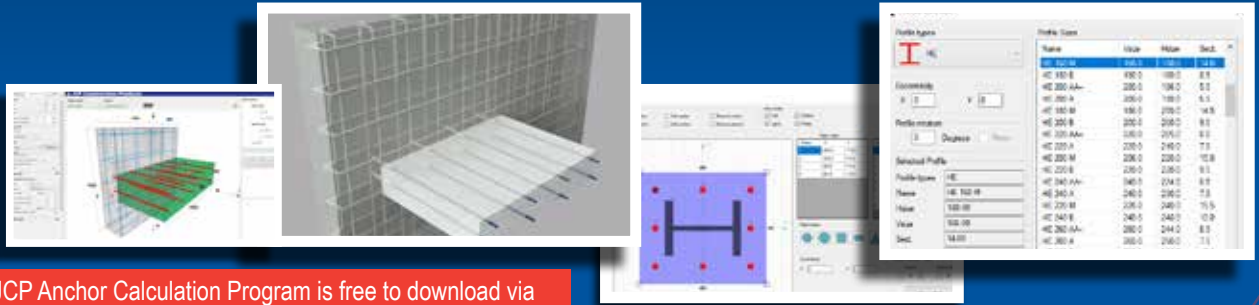


The JCP Anchor Calculation Program is free to download via www.jcpfixings.co.uk



RESIN CALCULATOR

“ Our free resin calculator helps to calculate the volume of resin required for a project based on the number of holes, anchor diameters and embedment depth. It is suitable for rebar and threaded bars. ”

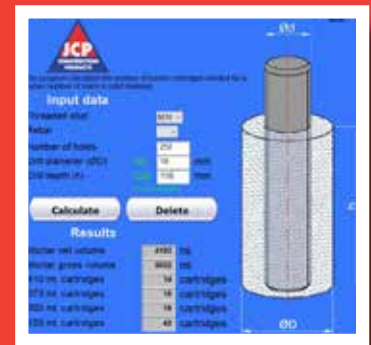

THE RESIN CALCULATOR IS FREE TO DOWNLOAD VIA www.jcpfixings.co.uk

Our sales offices are open Monday to Thursday 8.30 am to 5.30 pm and 8.30 am to 5.00 pm on Fridays.

Account-holders can order online - 24 hours a day, 7 days a week from www.owlett-jaton.com

☎ 020 8943 1800 ✉ jcp@owlett-jaton.com



FS 594325

EMS 713084





TECHNICAL SUPPORT



ON-SITE SUPPORT

Throughout the UK we offer on-site testing of our products by our highly experienced field representatives. Whether a building regulation requirement or for peace of mind, we will provide advice on behalf of a distributor. On-site pull out tests are part of the JCP culture.

In addition, our technical support team can provide a troubleshooting technical back up when required.

Our technical team offer training sessions to provide a hands-on-experience with our fixings. Sessions are tailored to meet the needs of the audience and can also be delivered virtually.

Find out more on page 75.



TRAINING

BACKED BY TECHNICAL KNOW-HOW AND EXPERIENCE

Further technical information, specifications, anchor calculations etc. are also available via our technical helpline.

In-depth technical support comes as standard with JCP.

TECHNICAL DATA LIBRARY

Datasheets can be found on the JCP website for products within the range. The data sheets provide detailed information on the following; where applicable.

- ✔ Product information
- ✔ Load and range data
- ✔ Performance data
- ✔ Installation instructions
- ✔ Features
- ✔ Base material guidance
- ✔ Related products



“ Highly experienced, our technical support team have many years of knowledge within the industry and can be relied on to offer guidance when required. ”

THE CERTIFIED RANGE

“ Our product range includes numerous certified products to support installers in meeting building specification requirements. ”



PROVIDING PEACE OF MIND

Look for these symbols alongside the products to easily identify which they are.



CE - indicates the product conforms with harmonised standards within the European Economic Area.



Seismic C1 + C2 - relates to anchors which are rated for use in concrete under seismic actions. C2 is the most stringent category. To qualify as C1 and /or C2 anchors must comply with EN1992-4 or TR045.



Fire resistance - offers fire resistance loading.



ETA Option 1 - anchors which have been approved for use in cracked and non-cracked concrete. They can be used for safely supporting applications in area's most vulnerable to cracking.



ETA Option 7 - versatile anchors approved for use in non-cracked concrete. They are very versatile for concretes with a strength class over 20/25.



WRAS - approved for use in contact with potable (drinking) water.

Please see page 119 for further information on the implementation of UKCA for construction products.



THROUGHBOLTS

PAGE 12



ANKERBOLTS

PAGE 17



DROP IN ANCHORS

PAGE 22



HEAVY DUTY ANCHORS

PAGE 27



INJECTION RESINS

PAGE 34



NYLON FRAME FIXINGS

PAGE 76

www.jcpfixings.co.uk

Our sales offices are open Monday to Thursday 8.30 am to 5.30 pm and 8.30 am to 5.00 pm on Fridays.

Account-holders can order online - 24 hours a day, 7 days a week from www.owlett-jaton.com



020 8943 1800



jcp@owlett-jaton.com

CONTENTS

HEAVY DUTY ANCHORS

THROUGHBOLTS AND ACCESSORIES

Throughbolts	12
Wirehangers	16
Nail In Sockets	16

ANKERBOLTS AND ACCESSORIES

Ankerbolts	17
Ankerbolt Drop In	20
Socket Bolts	21
Hook and Eye Bolts	21

INTERNAL THREADED ANCHORS

Drop In Anchors	22
ETA Drop In Anchor Setting Punches NEW	24
Drop In Anchor Setting Punches	24
Stop Drill Bits	24

HOOK AND EYE BOLTS

Forged Hook Bolts	25
Forged Eye Bolts	25
Scaffold Ring Bolts	26
Scaffold Retaining Eyes	26
Scaffold Eye Plugs	26

HEAVY DUTY EXPANSION ANCHORS

Heavy Duty Anchors	27
--------------------------	----

BLIND BOLTS

Blind Bolts	30
-------------------	----

CHEMICAL ANCHORS AND ACCESSORIES

INJECTION RESINS AND GLASS CAPSULES

J-Fix Pure Epoxy Resin	34
J-Fix Ultra Bond 100 Epoxy Resin NEW	34
J-Fix Vinylester Resin	34
J-Fix Vinylester Fast Cure	35
J-Fix Epoxy Acrylate Resin	36
J-Fix Polyester Styrene Free Resin	36
J-Fix Polyester Resin	36
J-Fix Spin In Glass Capsules	37
J-Fix Hammer In Glass Capsules	37

ANCHORING CEMENTS

Rockite	37
Kwixset	38

THREADED STUDS AND SOCKETS

J-Fix Studs	38
Injection Resin Sockets	41
Internal Threaded Sockets	41

INJECTION RESIN ACCESSORIES

Injection Tools	42
Injection Tool Accessories	42
Nylon Sleeves	43
Wire Mesh Sleeve	43
Wire Cleaning Brushes	43
Blow Out Pump	43

CRACK STITCHING ACCESSORIES

Crack Stitch Twist Starter Kit	44
Pointing Gun	44
Mixing Paddle	44
Stitching Bar	45
Cementitious Grout	45

PU FOAMS AND ACCESSORIES

B3 Expanding Foam	45
B2 Expanding Foam	46
B1 Fire Stop Expanding Foam	46
B1 Fire Sealant	46
Intumescent and Acoustic Mastic	48
Polyurethane Cleaner	48
Applicator Guns	48

MEDIUM DUTY ANCHORS

SLEEVE ANCHORS

Sleeve Anchors	49
----------------------	----

SHIELD ANCHORS

Shield Anchors	52
----------------------	----

CONCRETE SCREWS

Concrete Screws	54
-----------------------	----

SELF-DRILLING SCREWS

SELF-DRILLING SCREWS BZP

Metalfix	56
Woodfix	59
Metalfix Gash Point Screws	59
Metalfix Stitching Screws	60
Metalfix High Thread Screws	60
Metalfix Low Profile Screws	61
Wafer Head Screws	61
Metalfix Magnetic Sockets	61
Fibre Cement Screws	62

SELF-DRILLING SCREWS A2 STAINLESS STEEL

Metalfix	62
Woodfix	63
Metalfix Stitching Screws	64

COVER CAPS

Coloured Cover Caps	64
---------------------------	----

INTERNAL THREADED SELF-DRILLING SCREWS

Vertical Hangers	65
Horizontal Hangers	65
Gash Point Vertical Hangers	65
Gash Point Horizontal Hangers	65
Setting Tools	66

LIGHT DUTY FIXINGS

NAIL IN ANCHORS

Nail In Anchors	67
-----------------------	----

CONSTRUCTION NAILS

Plastic Headed Nails	68
Masonry Nails	68

SANITARY FIXINGS

Basin Fixings	69
W.C Fixings	70

BRACKETS

Vertical Flange Clips	70
Angle Brackets	70

WALL SCREWS

Wall Screws	71
-------------------	----

BIGTWIST NAILS

Bigtwist Nails	72
----------------------	----

FIXING BANDS

Fixing Bands	73
--------------------	----

NYLON AND CAVITY FIXINGS

NYLON HAMMER SCREWS

Hammer Screws	74
---------------------	----

NYLON FRAME FIXINGS

Nylon Frame Fixings	76
---------------------------	----

PLUGS

Push Plugs	78
------------------	----

Nylon Wall Plugs	78
------------------------	----

Plastic Plugs	79
---------------------	----

Metal Expansion Anchors	80
-------------------------------	----

CAVITY FIXINGS

J-Plug Plasterboard Fixings	81
-----------------------------------	----

Rosett Cavity Fixings	81
-----------------------------	----

Ankernuts	82
-----------------	----

Road Fixing Kit	82
-----------------------	----

Hollow Wall Anchors	82
---------------------------	----

Hollow Wall Anchor Setting Tool	83
---------------------------------------	----

Spring Toggles ZYP	83
--------------------------	----

Plastic Toggles	83
-----------------------	----

PA AND GAS

GAS NAILS

Drivefast Gas Nails	84
---------------------------	----

Brad Nails	85
------------------	----

CARTRIDGE TOOLS AND ACCESSORIES

Ceiling Hangers	86
-----------------------	----

PA97 Cartridge Tool Kit	86
-------------------------------	----

Cartridge Strips	86
------------------------	----

Shot Fired Pins	87
-----------------------	----

Plastic Washered Pins	87
-----------------------------	----

Magazine Pins	87
---------------------	----

DRILL BITS

DRILL BITS

SDS+ Drill Bits	88
-----------------------	----

Masonry Drill Bits	90
--------------------------	----

Masonry Drill Bit Sets	90
------------------------------	----

SDS+ Drill Bit Sets	90
---------------------------	----

HSS Drill Bits	91
----------------------	----

Cobalt HSS Drill Bits	92
-----------------------------	----

HSS Reduced Shank Drill Bits	92
------------------------------------	----

HSS Long Shank Drill Bits	93
---------------------------------	----

HSS Drill Bit Cases	93
---------------------------	----

HSS Countersink Drill Bits	93
----------------------------------	----

Cobalt Countersink Drill Bits	94
-------------------------------------	----

Tungsten Carbide Drill Bits	94
-----------------------------------	----

Auger Drill Bits NEW	95
-----------------------------------	----

Flat Wood Bits	95
----------------------	----

Centre Spur Wood Bits	95
-----------------------------	----

TX Driver Bits	95
----------------------	----

RETAIL BAG RANGE

HEAVY DUTY

Throughbolts	101
--------------------	-----

Ankerbolts	101
------------------	-----

Hook and Eye Bolts	102
--------------------------	-----

Sleeve Anchors	102
----------------------	-----

MEDIUM DUTY

Drop In Anchors	102
-----------------------	-----

Shield Anchors	103
----------------------	-----

Concrete Screws	103
-----------------------	-----

NYLON AND CAVITY

Nylon Hammer Screws	104
---------------------------	-----

Nylon Frame Fixings	104
---------------------------	-----

Wall Plugs	104
------------------	-----

Premium Plastic Plugs	105
-----------------------------	-----

Rosett Cavity Fixings	105
-----------------------------	-----

J-Plug Plasterboard Fixings	105
-----------------------------------	-----

Plasterboard Plugs	105
--------------------------	-----

Hollow Wall Anchors	106
---------------------------	-----

Spring Toggles	106
----------------------	-----

Plastic Toggles	106
-----------------------	-----

SELF-DRILLING SCREWS

Plastic Headed Nails	107
----------------------------	-----

Masonry Nails	107
---------------------	-----

Sanitary Fixings	107
------------------------	-----

Wall Screws	108
-------------------	-----

Bigtwist Nails	108
----------------------	-----

Metalfix Self-Drilling Screws	108
-------------------------------------	-----

Woodfix Self-Drilling Screws	109
------------------------------------	-----

Metalfix Gash Point Screws	110
----------------------------------	-----

Metalfix Stitching Screws	110
---------------------------------	-----

Wafer Head Self-Drilling Screws	110
---------------------------------------	-----

Metalfix Magnetic Sockets	110
---------------------------------	-----

TRADE BAG RANGE

HEAVY DUTY

Throughbolts	111
--------------------	-----

Ankerbolts	111
------------------	-----

MEDIUM DUTY

Shield Anchors	112
----------------------	-----

Concrete Screws	112
-----------------------	-----

NYLON AND CAVITY

Nylon Hammer Screws	112
---------------------------	-----

Nylon Frame Fixings	113
---------------------------	-----

J-Plug Metal Plasterboard Fixings	113
---	-----

Rosett Cavity Fixings	113
-----------------------------	-----

Hollow Wall Anchors	113
---------------------------	-----

SELF-DRILLING SCREWS

Wall Screws	114
-------------------	-----

Metalfix Self-Drilling Screws	114
-------------------------------------	-----

Woodfix Self-Drilling Screws	115
------------------------------------	-----

Metalfix Gash Point Screws	115
----------------------------------	-----

Metalfix Stitching Screws	115
---------------------------------	-----



PRODUCT FINDER

Product	Page No.	Non-Cracked Concrete	Cracked Concrete	Stone	Dense Concrete Blocks-Solid	Solid Brickwork	Perforated Brickwork	Light Aggregate Block-Solid	Light Aggregate Block-Hollow	Aerated Concrete Blocks-Solid	Hollow Concrete Planks	Hollow Clay Pats	Plasterboard	Solid Steel	Hollow Steel Section	Timber
Throughbolts ZYP	12	●			●											
Throughbolts Option 1 BZP	13	●	●		●											
Throughbolts Option 7 BZP	13	●			●											
Throughbolts Hot Dipped Galv	14	●			●											
Throughbolts A2 Stainless Steel	14	●			●											
Throughbolts Option 1 A4 Stainless Steel	15	●	●		●											
Throughbolts Option 7 A4 Stainless Steel	15	●			●											
Wire Hangers	16	●			●											
Nail In Sockets	16	●			●											
Ankerbolts	17	●		●	●	●		●			●					
Ankerbolts Option 1 BZP	19	●	●	●	●	●		●			●					
Ankerbolts A4 Stainless Steel	19	●		●	●	●		●			●					
Drop In Anchors ZYP	22	●														
Lipped Drop In Anchors ZYP	23	●			●						●					
Approved Drop In Anchors BZP	23	●	●													
Approved Lipped Drop In Anchors BZP	23	●			●						●					
Drop In Anchors A4 Stainless Steel	23	●														
Lipped Drop In Anchors A4 Stainless Steel	23	●	●		●						●					
Scaffold Eye and Plugs	26	●		●	●	●		●								
Heavy Duty Anchors	27	●	●													
Blind bolt	30													●	●	
J-Fix Epoxy Resin	34	●	●	●	●	●		●		●						
J-Fix Vinylester Resin	35	●	●	●	●	●		●		●						
J-Fix Epoxy Acrylate Resin	36	●		●	●											
J-Fix Polyester Styrene Free Resin	36			●	●	●	●	●	●	●	●	●				
J-Fix Polyester Resin	36			●	●	●	●	●	●	●	●	●				
J-Fix Injection Resin Sleeve	43						●		●		●	●				
Spin In Capsules	37	●														
Hammer In Capsules	37	●														
Rockite (Interior)	37	●	●		●											
Kwikset (Exterior)	37	●	●		●											
Crack Stitching	44					●	●	●	●	●						

Full Suitability ● More Suitable Alternative Available ●

Product	Page No.	Non-Cracked Concrete	Cracked Concrete	Stone	Dense Concrete Blocks-Solid	Solid Brickwork	Perforated Brickwork	Light Aggregate Block-Solid	Light Aggregate Block-Hollow	Aerated Concrete Blocks-Solid	Hollow Concrete Planks	Hollow Clay Pots	Plasterboard	Solid Steel	Hollow Steel Section	Timber
Sleeve Anchors	49	●		●	●	●										
Shield Anchors	52	●			●	●	●	●	●	●	●		●			
Concrete Screws	54	●		●	●	●	●									
Self Drilling Screws	56													●	●	
Gash Point Screws	59															●
Nail In Anchors	67	●			●											
Masonry Nails	68					●	●	●								
Plastic Headed Nails	68					●	●	●								
Sanitary Fixings	69	●			●	●		●								
Wall Screws	71	●			●	●	●	●	●	●	●		●			
Bigtwist Nails	72															●
Hammerscrews	74	●		●	●	●	●	●	●							
Nylon Frame Fixings	76	●		●	●	●		●	●							
Approved Frame Fixings	76	●	●	●	●	●	●	●	●	●						
Nylon Plugs	78	●		●	●	●	●	●	●	●	●					
Plastic Plugs	79	●		●	●	●	●	●	●	●	●					
Metal Plugs	80									●						
J-Pug Plasterboard Fixings	81												●			
Rosett Cavity Fixings	81											●	●			
Ankernuts	82	●					●		●			●	●			
Hollow Wall Anchors	82												●			
Spring Toggles	83												●			
Plastic Toggles	83												●			
Drivefast Nails	84															●
Powder Actuated Drive Pins	87	●			●	●								●	●	

Full Suitability ● More Suitable Alternative Available ●

www.jcpfixings.co.uk

Our sales offices are open Monday to Thursday 8.30 am to 5.30 pm and 8.30 am to 5.00 pm on Fridays.

Account-holders can order online - 24 hours a day, 7 days a week from www.owlett-jaton.com



020 8943 1800



jcp@owlett-jaton.com



NEW PRODUCTS FROM JCP

“Introducing new products to the range underlines our commitment to mirroring the ever-changing demands of the construction industry and, ultimately, the needs of our customers.”



ETA DROP IN ANCHOR SETTING PUNCHES

PAGE 24

The setting tool is designed to assist in rapid and repetitive application of drop in anchors into the substrate.

- ✔ Safely Install ETA Approved Drop In Anchors
- ✔ Used With A Hammer



J-FIX ULTRA-BOND 100 EPOXY RESIN

PAGE 34



Ultra-Bond 100 epoxy resin is a formulation derived from pure epoxy with very high bond strength. The two-component chemical anchoring injection system in a 3:1 ratio can achieve high loads and is used for high-performance structural applications where loading is critical.

- ✔ Cracked Concrete
- ✔ Non-Cracked Concrete
- ✔ Our Highest-Strength Resin



AUGER DRILL BITS

PAGE 95

- ✔ For Drilling Into Wood
- ✔ The Screw Tip Keeps The Drill Bit Accurate Throughout The Drilling
- ✔ Hexagon Shank For Improved Hold In The Drill Chuck
- ✔ A Spiral-Shaped Bit With A Threaded Tip At The Front And Two Chisels At Each Tip End



THE FULL JCP RANGE IS AVAILABLE TO ORDER FROM WWW.OWLETT-JATON.COM



The Product Range


- ✓ Over 1,500 Products
- ✓ Technical Drawings
- ✓ Features and Benefits



THROUGHBOLTS AND ACCESSORIES

The throughbolt is the ultimate 'through fixing' with the hole diameter as the bolt diameter, ideal for bolting in place awkward fixtures without the need for marking out, removal, and repositioning.

- Fast And Secure Installation
- Three Way Expansion Sleeve
- Reaction To Fire Class A1
- Through Fixing

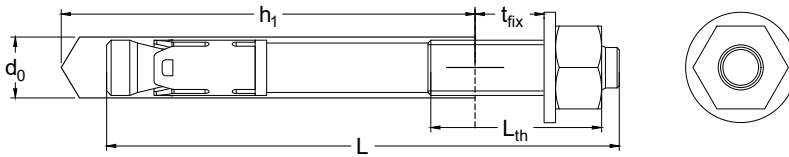

d_0 =Anchor Hole Size L =Anchor Length L_{th} =Thread Length h_1 =Minimum Hole Depth t_{fix} =Max Fixture Thickness



THROUGHBOLTS ZYP

ZINC AND YELLOW PLATED

- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fix}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
TB06045	6	45	18	35	5	100	1.26	11.58
TB06055	6	55	30	35	15	100	1.34	12.27
TB06085	6	85	60	35	45	100	2.12	14.04
TB08050	8	50	20	40	5	100	2.60	15.42
TB08065	8	65	30	40	20	100	3.14	17.19
TB08080	8	80	45	40	35	50	3.54	18.31
TB08100	8	100	60	40	55	50	4.08	20.95
TB08130	8	130	90	40	85	50	4.88	24.89
TB10065	10	65	30	50	8	50	4.80	25.37
TB10075	10	75	35	50	18	50	5.40	27.11
TB10090	10	90	55	50	33	50	6.32	29.29
TB10100	10	100	60	50	43	50	6.95	31.04
TB10120	10	120	80	50	63	20	8.20	37.92
TB10150	10	150	100	50	93	20	10.25	43.61
TB10175	10	175	100	50	118	20	12.30	51.64
TB12080	12	80	35	65	5	20	8.10	42.13
TB12100	12	100	55	65	25	20	9.60	47.07
TB12120	12	120	70	65	45	20	11.30	53.26
TB12140	12	140	90	65	65	20	13.00	58.45
TB12180	12	180	100	65	105	20	16.40	76.75
TB16105	16	105	55	85	10	20	19.85	84.36
TB16125	16	125	72	85	30	20	22.50	95.31
TB16150	16	150	90	85	55	20	26.18	108.17
TB16175	16	175	115	85	80	10	29.85	129.16
TB16220	16	220	125	85	125	10	35.00	165.62
TB20130	20	130	75	100	20	10	36.80	178.86
TB20160	20	160	100	100	50	10	45.20	197.88
TB20215	20	215	115	100	105	10	58.10	248.93
TB24180	24	180	105	120	45	10	69.00	361.42
TB24260	24	260	150	120	125	5	98.00	469.56



ETA OPTION 1 THROUGH BOLTS BZP

- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Fire Resistance Loading
- Minimum 5µm



BRIGHT ZINC PLATED

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Standard Embedment		Shallow Embedment		Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
				Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}			
ETA08075	8	75	20	60	10	49	21	100	2.99	71.76
ETA08095	8	95	40	60	30	49	41	100	3.60	81.33
ETA08115	8	115	60	60	50	49	61	100	4.24	90.89
ETA10090	10	90	20	75	10	55	30	50	5.88	104.90
ETA10110	10	110	40	75	30	55	50	50	6.88	121.65
ETA10130	10	130	60	75	50	55	70	50	9.90	133.95
ETA12110	12	110	30	90	15	70	35	25	9.92	159.58
ETA12125	12	125	45	90	30	70	50	25	11.00	187.60
ETA12160	12	160	80	90	65	70	85	25	13.60	247.05
ETA12180	12	180	80	90	85	70	105	25	15.00	253.20
ETA16135	16	135	35	110	15	90	35	20	21.60	322.23
ETA16170	16	170	70	110	50	90	70	20	26.30	364.26
ETA16200	16	200	80	110	80	90	100	10	32.00	503.68
ETA20165	20	165	50	125	30	-	-	10	44.10	1,131.39
ETA20195	20	195	70	125	60	-	-	10	50.50	1,352.82



ETA OPTION 7 THROUGH BOLTS BZP

- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Minimum 5µm



BRIGHT ZINC PLATED

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Standard Embedment		Shallow Embedment		Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
				Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}			
AWA06060	6	60	25	55	3	50*	8	100	1.36	12.88
AWA06080	6	80	45		23		28	100	2.10	14.74
AWA08050*	8	50	17	-	-	45*	3	100	2.60	16.19
AWA08065	8	65	22	-	-		8	100	3.14	18.04
AWA08075	8	75	32	65	3	50**	18	50	3.52	19.23
AWA08090	8	90	46		18		33	50	4.04	21.99
AWA08100	8	100	50		28		43	50	4.08	22.50
AWA08115	8	115	65		43		58	50	4.60	23.95
AWA08130	8	130	80		58		73	50	4.88	26.14
AWA10065*	10	65	22		-		-	55*	3	50
AWA10075	10	75	27	-	-	8	50		5.40	28.46
AWA10090	10	90	43	75	8	60	23	50	6.32	30.75
AWA10100	10	100	53		18		33	50	6.95	32.59
AWA10120	10	120	71		38		53	20	8.20	39.81
AWA10150	10	150	95		68		83	20	10.25	45.79
AWA12080*	12	80	32	-	-	60*	10	20	8.10	54.22
AWA12090	12	90	35	-	-		10	20	9.35	44.24
AWA12100	12	100	44	85	5	70	20	20	9.60	49.43
AWA12110	12	110	53		15		30	20	10.50	52.50
AWA12120	12	120	63		25		40	20	11.30	55.92
AWA12140	12	140	83		45		60	20	13.00	61.38
AWA12160	12	160	95		65		80	20	15.05	69.50
AWA12180	12	180	95		85		100	20	16.40	80.58
AWA12200	12	200	95		105		120	20	18.00	86.25
AWA16105*	16	105	40		-		-	85*	6	20
AWA16125	16	125	60	-	-	11	20		22.50	100.07
AWA16145	16	145	80	115	16	100	31	20	25.80	113.57
AWA16170	16	170	105		41		56	10	29.10	135.62
AWA16220	16	220	115		91		106	10	35.00	173.90
AWA20130	20	130	60	-	-	110	5	10	36.80	187.81
AWA20170	20	170	100	20	45		10	46.65	207.78	
AWA20215	20	215	115	65	90		10	58.10	261.37	
AWA24180	24	180	100	155	5	125	33	10	69.00	379.49
AWA24260	24	260	150		85		113	5	98.00	493.04

* Not included in ETA

** Use restricted to the anchoring of structural components which are statically indeterminate.



THROUGHBOLTS HDG

**HOT DIPPED
GALVANISED**
 Concrete C20/25 To C50/60 Non-Cracked Concrete BS EN ISO1461:2009 Minimum 45µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
TG08050	8	50	15	45	5*	100	2.32	29.88
TG08075	8	75	40	65	10	100	3.44	35.74
TG08095	8	95	50	65	30	100	4.19	39.05
TG08120	8	120	85	65	55	100	5.09	44.84
TG10060	10	60	20	50	10*	50	4.62	51.50
TG10070	10	70	30	50	20*	50	5.21	54.84
TG10080	10	80	40	70	10	50	6.00	56.95
TG10100	10	100	55	70	30	50	6.94	65.62
TG10125	10	125	80	70	50	50	8.42	71.48
TG12085	12	85	40	70	10*	25	10.00	88.51
TG12100	12	100	55	90	5	25	10.20	94.33
TG12115	12	115	60	90	20	25	11.36	96.37
TG12145	12	145	95	90	50	25	13.92	115.15
TG12180	12	180	110	90	85	25	16.84	132.54
TG16110	16	110	50	85	15*	20	20.70	176.98
TG16125	16	130	65	110	10	20	22.50	191.10
TG16150	16	150	90	110	30	20	25.20	205.66
TG16200	16	200	115	110	80	20	30.03	260.03
TG20170	20	170	100	130	25	10	49.60	381.36
TG20220	20	220	125	130	75	10	65.00	493.16
TG20280	20	280	150	130	135	10	72.49	755.88

* Reduced loading due to shallow embedment



THROUGHBOLTS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**
 Concrete C20/25 To C50/60 Non-Cracked Concrete Suitable For External Use

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fx}	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
TSSA206045	6	40	20	35	5	100	1.15	50.83
TSSA206065	6	65	30	35	25	100	1.38	59.07
TSSA208050	8	50	18	40	5	100	2.32	77.59
TSSA208075	8	75	41	40	30	50	3.44	94.12
TSSA208095	8	95	60	40	50	50	4.19	105.88
TSSA208120	8	120	64	40	75	50	5.09	136.94
TSSA210060	10	60	20	50	3	50	4.62	125.56
TSSA210080	10	80	40	50	23	50	6.00	150.79
TSSA210100	10	100	59	50	43	50	6.94	169.31
TSSA210125	10	125	85	50	68	20	8.42	190.88
TSSA210150	10	150	78	50	93	20	10.25	462.36
TSSA210175	10	175	88	50	118	20	11.40	618.61
TSSA212085	12	85	40	65	10	20	10.00	202.31
TSSA212100	12	100	60	65	25	20	10.20	236.25
TSSA212115	12	115	59	65	40	20	11.36	271.76
TSSA212145	12	145	80	65	70	20	13.92	298.75
TSSA212200	12	200	85	65	125	20	16.84	611.39
TSSA216110	16	110	50	85	15	20	16.80	544.03
TSSA216125	16	125	65	85	30	20	18.00	591.94
TSSA216150	16	150	90	85	55	20	25.20	675.74
TSSA216175	16	175	83	85	80	10	30.50	886.85
TSSA220170	20	170	83	100	60	10	49.60	1,322.96
TSSA220220	20	220	115	100	110	10	65.00	1,773.43



ETA OPTION 1 THROUGH BOLTS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Fire Resistance Loading
- Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Standard Embedment		Shallow Embedment		Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
				Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fix}			
ETA08065SS*	8	65	22	-	-	50	11	100	2.69	264.17
ETA08080SS	8	80	37	60	15	50	26	100	3.14	284.67
ETA08095SS	8	95	52	60	30	50	41	100	3.60	347.75
ETA80115SS	8	115	72	60	50	50	61	100	4.24	388.36
ETA10080SS*	10	80	32	-	-	55	20	50	5.38	374.96
ETA10100SS	10	100	52	75	20	55	40	50	6.36	420.69
ETA10130SS	10	130	82	75	50	55	70	50	7.90	628.08
ETA10180SS	10	180	132	75	100	55	120	50	10.32	1021.18
ETA12095SS*	12	95	36	-	-	70	20	25	9.12	561.45
ETA12110SS	12	110	51	90	15	70	35	25	10.20	636.76
ETA12125SS	12	125	66	90	30	70	50	25	11.36	689.20
ETA12160SS	12	160	101	90	65	70	85	25	13.92	932.86
ETA12200SS	12	200	135	90	105	70	125	25	16.84	1,156.42
ETA16115SS*	16	115	36	-	-	90	15	20	18.80	1,279.04
ETA16135SS	16	135	56	110	15	90	35	20	21.60	1,460.40
ETA16170SS	16	170	91	110	50	90	70	20	26.80	1,906.33
ETA16220SS	16	220	80	110	100	-	-	10	35.90	2,593.16
ETA20165SS	20	165	50	125	30	-	-	10	45.10	3,883.63
ETA20195SS	20	195	70	125	60	-	-	10	51.40	4,296.04
ETA20235SS	20	235	80	125	100	-	-	5	61.80	5,002.59

* Reduced loading due to shallow embedment



ETA OPTION 7 THROUGH BOLTS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Fire Resistance Loading
- Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Thread Length mm L_{th}	Minimum Hole Depth mm h_1	Max Fixture Thickness mm t_{fix}	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
TSS06040	6	40	16	35	5*	100	1.12	105.07
TSS06065	6	67	30	55	10	100	1.38	130.38
TSS08050	8	50	22	45	5*	100	2.32	123.66
TSS08075	8	75	40	65	10	100	3.44	139.99
TSS08095	8	95	60	65	30	100	4.19	165.30
TSS08120	8	120	85	65	55	100	5.09	197.98
TSS10060	10	60	25	50	10*	50	4.62	187.73
TSS10080	10	85	40	70	10	50	6.00	216.88
TSS10100	10	105	60	70	30	50	6.94	250.83
TSS10125	10	125	80	70	50	50	8.42	284.79
TSS10175	10	175	80	70	100	50	11.40	418.06
TSS10215	10	215	80	70	140	25	12.40	597.13
TSS12085	12	95	50	80	14*	25	10.00	334.77
TSS12100	12	105	60	90	10	25	10.20	350.14
TSS12115	12	115	70	90	20	25	11.36	398.20
TSS12145	12	145	100	90	50	25	13.92	475.40
TSS12200	12	200	100	90	105	25	16.84	719.83
TSS16110	16	115	60	90	13*	20	16.80	822.66
TSS16125	16	130	70	110	10	20	18.00	914.60
TSS16150	16	150	90	110	30	20	25.20	955.28
TSS16175	16	180	110	110	60	20	30.05	1,151.34
TSS20170	20	180	70	130	35	10	49.60	1,838.81
TSS20220	20	240	70	130	95	10	65.00	2,802.10

* Reduced loading due to shallow embedment




WIREHANGERS

ZINC AND YELLOW PLATED

The wirehanger is an expansion anchor for securing suspension wires.

- ✔ Non-Cracked Concrete
- ✔ Fast And Secure Installation
- ✔ Pull Down Expansion
- ✔ Hammer In Fixing
- ✔ Reaction To Fire Class A1
- ✔ Minimum 5µm



d_0 =Anchor Hole Size L=Anchor Length d_{eye} =Eye Diameter h_1 =Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Eye Diameter mm d_{eye}	Minimum Hole Depth mm h_1	Rec Tensile Load kN	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
TW06055	6	55	6	40	1.5	100	1.15	14.74




NAIL IN SOCKETS



A dual thread socket for multiple use in non-structural concrete applications. Simply hammer into the base material.

- ✔ Concrete C12/15
- ✔ Concrete C20/25 To C50/60
- ✔ Cracked Concrete
- ✔ Non-Cracked Concrete
- ✔ Fast And Secure Installation
- ✔ Auto Expanding Action
- ✔ No Torque Wrench Required
- ✔ Fire Resistance Classification R120



d_0 =Anchor Hole Size L=Anchor Length h_1 =Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Internal Thread Diameter M	Minimum Hole Depth mm h_1	Rec Tensile Load kN	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
NAS0625	6	25	8 & 10	30	2.14	100	2.75	116.24
NAS0630	6	30	8 & 10	35	2.81	100	2.85	123.86

JCP IS A MEMBER OF THE EUROPEAN CONSORTIUM OF ANCHOR PRODUCERS

A small group of small and medium-sized European producers, the members join forces in a 100% self-financed consortium to influence the standardisation of their products. The products include mechanical, chemical and plastic anchors, powder actuated tools and their components, concrete and wood screws and 3-D nailing plates.






ANKERBOLTS AND ACCESSORIES

The anchorbolt is a self-tapping anchor for use in a variety of base materials, with the self-tapping action providing a positive anchorage in non-cracked concrete, brick, stone, and blocks.

- ✔ Fast and Secure Installation
- ✔ Expansion Free
- ✔ Undercutting Action
- ✔ Through Fixing
- ✔ High-Performance

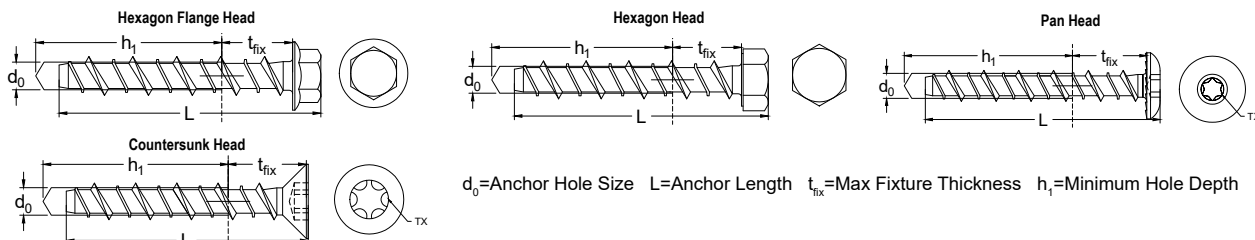

HEXAGON FLANGE HEAD ANKERBOLTS BZP

BRIGHT ZINC PLATED

- ✔ Concrete C20/25 To C50/60
- ✔ Non-Cracked Concrete
- ✔ Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB05/06050	5	50	25	35	8	100	0.98	13.18
JAB05/06075	5	75	50	35	8	100	1.35	17.09
JAB05/06100	5	100	75	35	8	100	1.60	23.69
JAB06/08030	6	30	5	35	10	100	1.00	14.83
JAB06/08050	6	50	20	40	10	100	1.49	19.69
JAB06/08075	6	75	45	40	10	100	2.02	25.20
JAB06/08100	6	100	70	40	10	100	2.57	32.14
JAB06/08130	6	130	100	40	10	100	3.23	44.44
JAB06/08150	6	150	120	40	10	100	3.66	48.91



HEXAGON HEAD ANKERBOLTS BZP

BRIGHT ZINC PLATED

- ✔ Concrete C20/25 To C50/60
- ✔ Non-Cracked Concrete
- ✔ Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB08/10060	8	60	20	55	15	100	2.99	37.66
JAB08/10075	8	75	35	55	15	100	3.58	44.90
JAB08/10100	8	100	60	55	15	100	4.53	56.29
JAB08/10130	8	130	90	55	15	50	5.20	75.72
JAB08/10150	8	150	110	55	15	50	5.48	87.94
JAB10/12060	10	60	10	70	17	50	4.68	59.36
JAB10/12075	10	75	25	70	17	50	5.50	69.09
JAB10/12100	10	100	50	70	17	50	7.06	87.84
JAB10/12130	10	130	80	70	17	25	9.50	115.89
JAB10/12150	10	150	100	70	17	25	10.15	131.05
JAB12/14075	12	75	15	85	19	50	8.00	116.46
JAB12/14100	12	100	40	85	19	50	10.18	139.98
JAB12/14130	12	130	70	85	19	25	12.75	184.94
JAB12/14150	12	150	90	85	19	20	14.17	214.68
JAB12/14200	12	200	140	85	19	20	18.90	271.56
JAB14/16075	14	75	5	100	24	25	12.62	207.54
JAB14/16100	14	100	30	100	24	25	15.51	235.22
JAB14/16130	14	130	60	100	24	20	19.00	276.66
JAB14/16150	14	150	80	100	24	10	21.30	312.59
JAB14/16200	14	200	130	100	24	10	27.19	395.35
JAB16/18100*	16	100	20	110	27	10	22.00	306.47
JAB16/18150*	16	150	70	110	27	10	29.70	389.12
JAB16/18200*	16	200	120	110	27	10	37.60	497.25

* Mechanical Galvanised • Min 40µm



PAN HEAD ANKERBOLTS BZP

**BRIGHT ZINC
PLATED**
 Concrete C20/25 To C50/60 Non-Cracked Concrete Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Head Diameter mm	Driver Type TX	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB05/06050PH	5	50	25	35	16	T25	100	1.08	17.82
JAB05/06075PH	5	75	50	35	16	T25	100	1.45	22.47
JAB05/06100PH	5	100	75	35	16	T25	100	1.81	26.24
JAB06/08030PH	6	30	5	35	16	T30	100	1.25	19.82
JAB06/08050PH	6	50	20	40	16	T30	100	1.70	25.20
JAB06/08075PH	6	75	45	40	16	T30	100	2.26	32.33
JAB06/08100PH	6	100	70	40	16	T30	100	2.82	41.15



COUNTERSUNK HEAD ANKERBOLTS BZP

**BRIGHT ZINC
PLATED**
 Concrete C20/25 To C50/60 Non-Cracked Concrete Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Head Diameter mm	Driver Type TX	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB05/06030CS	5	30	5	35	9.5	T25	100	0.83	8.75
JAB05/06050CS	5	50	20	40	9.5	T25	100	0.97	11.53
JAB05/06075CS	5	75	45	40	9.5	T25	100	1.32	15.83
JAB05/06100CS	5	100	70	40	9.5	T25	100	1.65	22.26
JAB06/08030CS	6	30	5	35	12.5	T30	100	0.85	11.97
JAB06/08050CS	6	50	20	40	12.5	T30	100	1.19	16.09
JAB06/08075CS	6	75	45	40	12.5	T30	100	1.73	21.72
JAB06/08100CS	6	100	70	40	12.5	T30	100	2.58	30.96
JAB06/08130CS	6	130	100	40	12.5	T30	100	2.94	39.74
JAB06/08150CS	6	150	120	40	12.5	T30	100	3.32	46.87
JAB08/10060CS	8	60	20	55	17.5	T45	100	2.89	37.40
JAB08/10075CS	8	75	35	55	17.5	T45	100	3.48	45.58
JAB08/10100CS	8	100	60	55	17.5	T45	100	4.43	59.40
JAB10/12060CS	10	60	10	70	21	T50	50	4.58	61.01
JAB10/12075CS	10	75	25	70	21	T50	50	5.40	74.47
JAB10/12100CS	10	100	50	70	21	T50	50	6.96	96.88



HEXAGON FLANGE HEAD ANKERBOLTS GALV

**MECHANICAL
GALVANISED**
 Concrete C20/25 To C50/60 Non-Cracked Concrete Minimum 40µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08050G	6	50	20	40	10	100	1.49	20.60
JAB06/08075G	6	75	45	40	10	100	2.02	26.80
JAB06/08100G	6	100	70	40	10	100	2.57	33.62



HEXAGON HEAD ANKERBOLTS GALV

**MECHANICAL
GALVANISED**

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 40µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB08/10060G	8	60	20	55	15	100	2.99	39.69
JAB08/10100G	8	100	60	55	15	100	4.53	58.13
JAB08/10150G	8	150	110	55	15	50	5.48	90.34
JAB10/12060G	10	60	10	70	17	50	4.68	63.09
JAB10/12100G	10	100	50	70	17	50	7.06	91.79
JAB10/12150G	10	150	100	70	17	25	10.15	134.79
JAB12/14100G	12	100	40	85	19	50	10.18	144.22
JAB12/14150G	12	150	90	85	19	20	14.17	217.37
JAB12/14200G	12	200	140	85	19	20	18.90	280.34



ETA OPTION 1 HEXAGON HEAD ANKERBOLTS BZP



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Fire Resistance Loading
 Minimum 5µm

**BRIGHT ZINC
PLATED**

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB08/10075ETA	8	80	10	90	15	100	3.58	57.40
JAB08/10100ETA	8	100	35	90	15	100	4.53	66.40
JAB08/10130ETA	8	130	65	90	15	50	5.20	71.70
JAB08/10150ETA	8	150	85	90	15	50	5.48	82.18
JAB10/12100ETA	10	100	25	100	17	50	7.06	103.23
JAB10/12130ETA	10	130	55	100	17	25	9.50	136.80
JAB10/12150ETA	10	150	75	100	17	25	10.15	154.95
JAB12/14100ETA	12	100	5	110	19	50	10.18	167.46
JAB12/14130ETA	12	130	35	110	19	25	12.75	220.87
JAB12/14150ETA	12	150	55	110	19	20	14.17	247.89
JAB12/14200ETA	12	200	105	110	19	20	18.90	252.80
JAB14/16130ETA	14	130	20	130	24	20	19.00	299.36
JAB14/16150ETA	14	150	40	130	24	10	21.30	336.19
JAB14/16200ETA	14	200	90	130	24	10	27.19	412.13
JAB16/18150ETA	16	150	30	145	27	10	29.70	426.42
JAB16/18200ETA	16	200	80	145	27	10	37.60	552.23



ETA COUNTERSUNK ANKERBOLTS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Bi-Metallic
 Carbon Steel Tip With Leading Threads To Cut Into Concrete
 ETAG 001-6
 Fire Resistance Loading
 Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Head Diameter mm	Driver Type TX	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08050CSSS*	6	50	20	40	15	T40	100	1.49	177.36
JAB06/08075CSSS	6	75	45	40	15	T40	100	2.04	231.16
JAB06/08100CSSS	6	100	70	40	15	T40	100	2.60	288.15

* Not included in ETA



ETA HEXAGON FLANGE HEAD ANKERBOLTS A4 STAINLESS STEEL

- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Bi-Metallic
- Carbon Steel Tip With Leading Threads To Cut Into Concrete
- ETAG 001-6
- Fire Resistance Loading
- Suitable For External Use And Marine Environments



**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08050SS*	6	50	20	40	10	100	1.54	165.80
JAB06/08075SS	6	75	45	40	10	100	2.08	221.20
JAB06/08100SS	6	100	70	40	10	100	2.63	265.43
JAB08/10060SS*	8	60	20	55	13	100	3.27	288.15
JAB08/10075SS	8	75	35	55	13	100	3.87	356.30
JAB08/10100SS	8	100	60	55	13	100	4.88	448.37
JAB10/12075SS*	10	75	25	70	17	50	6.44	507.75
JAB10/12100SS*	10	100	50	70	17	50	7.96	634.89
JAB10/12150SS*	10	150	100	70	17	25	11.04	958.91
JAB12/14100SS*	12	100	40	85	19	50	11.53	856.09

* Not included in ETA




ANKERBOLT DROP IN

A self-tapping anchor providing a flush internal thread. Ideal for threaded rods or bolts.

**BRIGHT ZINC
PLATED**

- Undercutting Action
- Provides A Flush Fixing
- Minimum 5µm



d_0 =Anchor Hole Size L=Anchor Length h_1 =Minimum Hole Depth


Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Diameter M	Head Diameter mm	Driver Type	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JABDBM10	13	32	50	10	N/A	6mm Hex	100	2.20	78.08



ANKERBOLT DROP IN SETTING TOOL

The ankerbolt drop in setting tool is designed to assist in rapid and repetitive application of drop in anchors.

- Used With An Impact Driver



Part Number	Drive Size	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per Each
JABDBM10ST	1/2"	1	6.50	7.11



JAB06/08SOCKET




JAB06/08SOCM08
JAB06/08SOCM10

SOCKET BOLTS

- ✓ Concrete C20/25 To C50/60
- ✓ Fire Resistance Classification R120



BRIGHT ZINC PLATED



d_0 = Anchor Hole Size L = Anchor Length h_1 = Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Diameter M	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08SOCKET	6	75	50	8 & 10	17	50	6.42	122.26
JAB06/08SOCM08	6	55	50	8	13	100	2.20	46.82
JAB06/08SOCM10	6	55	50	10	13	100	2.00	44.90




ETA DUAL THREADED SOCKET BOLTS

- ✓ Concrete C20/25 To C50/60
- ✓ Cracked Concrete
- ✓ Non-Cracked Concrete
- ✓ ETAG 001-6
- ✓ Fire Resistance Classification R120
- ✓ Minimum 5 μ m



BRIGHT ZINC PLATED



d_0 = Anchor Hole Size L = Anchor Length h_1 = Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Diameter M	Across Flats mm A/F	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08SOCETA	6	85	65	8 & 10	13	100	3.07	127.96



Hook Bolt




Eye Bolt

HOOK BOLTS AND EYE BOLTS

- ✓ Fast And Secure Installation
- ✓ Expansion Free
- ✓ Minimum 5 μ m

BRIGHT ZINC PLATED



d_0 = Anchor Hole Size L = Anchor Length h_1 = Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Thread Length mm	Anchor Length mm L	Minimum Hole Depth mm h_1	Eye Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JAB06/08050HOOK	6	50	90	65	13	50	2.56	74.78
JAB08/10055HOOK	8	55	100	70	14	50	4.96	104.15
JAB06/08050EYE	6	50	90	65	13	50	2.80	86.75
JAB08/10055EYE	8	55	100	70	14	50	5.50	135.04



INTERNAL THREADED ANCHORS

A deformation-controlled internally threaded socket anchor suitable for multiple use. The anchor can be accurately set independent of the hole depth, preventing the anchor from being inserted too far. The internal thread is suitable for bolts or threaded studs.

- ✔ Fast And Secure Installation
- ✔ Deformation-Controlled Expansion
- ✔ Reaction To Fire Class A1
- ✔ Permanent Socket Allows For Removal And Replacement Of The Fixture



d_0 =Anchor Hole Size L =Anchor Length h_1 =Minimum Hole Depth L_{th} =Internal Thread Length



DROP IN ANCHORS ZYP

ZINC AND YELLOW PLATED

- ✔ Concrete C20/25 To C50/60
- ✔ Non-Cracked Concrete
- ✔ Minimum 5µm

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Thread Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
DBM06	6	8	25	25	10	100	0.84	4.92
DBM08	8	10	30	30	14	100	1.58	6.87
DBM10	10	12	40	40	15	50	2.40	15.01
DBM12	12	15	50	50	20	50	5.92	34.65
DBM16	16	20	65	65	22	25	11.20	65.49
DBM20	20	25	80	80	30	25	19.00	169.34



ETA DROP IN ANCHORS BZP



- ✔ Solid Cracked Concrete C20/25 To C50/60
- ✔ Solid Non-Cracked Concrete C20/25 To C50/60
- ✔ ETAG 001-6
- ✔ Fire Resistance Loading
- ✔ Minimum 5µm

BRIGHT ZINC PLATED

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
ADBM08	8	10	30	30	13	100	1.17	27.05
ADBM10	10	12	40	40	15	50	2.14	44.77
ADBM12	12	15	50	50	18	50	4.36	70.21
ADBM16	16	20	65	65	23	25	10.20	145.57



LIPPED DROP IN ANCHORS ZYP

ZINC AND
YELLOW PLATED

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
DBM06SH	6	8	25	25	10	100	0.84	9.03
DBM08SH	8	10	30	30	14	100	1.58	12.22
DBM10SH	10	12	30	30	15	50	2.00	16.15
DBM10SHL	10	12	40	40	15	50	2.40	21.08
DBM12SH	12	15	50	50	20	50	5.92	26.99
DBM16SH	16	20	65	65	22	25	11.20	62.98



ETA LIPPED DROP IN ANCHORS BZP



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Solid Concrete C12/15 To C50/60
 ETAG 001-6
 Fire Resistance Loading
 Minimum 5µm

BRIGHT ZINC
PLATED

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
ADBM0825SH	8	10	25	25	12	100	1.05	24.06
ADBM0830SH	8	10	30	35	13	100	1.15	24.35
ADBM1025SH	10	12	25	25	12	50	0.80	29.86
ADBM1040SH	10	12	40	40	15	50	2.20	40.29
ADBM1225SH	12	15	25	25	12	50	2.30	52.17
ADBM1250SH	12	15	50	50	18	50	4.30	63.19



ETA DROP IN ANCHORS A4 STAINLESS STEEL



- Solid Cracked Concrete C20/25 To C50/60
 Solid Non-Cracked Concrete C20/25 To C50/60
 ETAG 001-6
 Fire Resistance Loading
 Suitable For External Use And Marine Environments

A4-316
STAINLESS STEEL

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
DSSM06	6	8	30	30	11	100	0.82	118.96
DSSM08	8	10	30	30	13	100	1.60	147.34
DSSM10	10	12	40	40	15	50	2.38	259.66
DSSM12	12	15	50	50	19	50	5.96	484.30
DSSM16	16	20	65	65	25	25	11.80	923.01



ETA LIPPED DROP IN ANCHORS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Solid Concrete C12/15 To C50/60
 ETAG 001-6
 Fire Resistance Loading
 Suitable For External Use And Marine Environments

A4-316
STAINLESS STEEL

Part Number	Internal Thread Diameter M	Anchor Hole Size mm d_0	Anchor Length mm L	Minimum Hole Depth mm h_1	Internal Thread Length mm L_{th}	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
ADSSM08SH	8	10	30	30	13	100	1.15	170.26
ADSSM10SH	10	12	40	40	15	50	2.20	299.57
ADSSM12SH	12	15	50	50	18	50	4.30	559.27



ETA DROP IN ANCHOR SETTING PUNCHES **NEW**

The setting tool is designed to assist in rapid and repetitive application of drop in anchors into the substrate.

- Safely Install ETA Approved Drop In Anchors Used With A Hammer

Part Number	Drop In Anchor	Quantity Per Box	Ship Wt.kg Per Each	Price £ Per Each
ESM0825	ADB0825SH	1	0.45	15.50
ESM0830	ADB0830SH and ADSSM08SH	1	0.45	15.50
ESM1025	ADB1025SH	1	0.45	16.00
ESM1040	ADB1040SH and ADSSM10SH	1	0.45	16.00
ESM1225	ADB1225SH and ADSSM12SH	1	0.45	40.00
ESM1250	ADB1250SH	1	0.45	40.00

DROP IN ANCHOR SETTING PUNCHES



- Safely Install Drop In Anchors Used With A Hammer

Part Number	Quantity Per Box	Ship Wt.kg Per Each	Price £ Per Each
DZSP06	1	0.10	2.17
DZSP08	1	0.15	3.00
DZSP10	1	0.16	4.29
DZSP12	1	0.22	4.58
DZSP16*	1	0.41	4.88
DZSP20*	1	0.55	5.21

With Hand Guard

* Without hand guard



Without Hand Guard

STOP DRILL BITS

For drilling the correct hole depth for 25mm and 30mm drop in anchors, reducing the risk of hitting rebar.

- Collar To Ensure Correct Depth

Part Number	Diameter mm	Working Length mm	Overall Length mm	Quantity Per Box	Ship Wt.kg Per Each	Price £ Per Each
SD10025	10	25	110	1	0.71	2.96
SD10030	10	30	110	1	0.73	2.96
SD12025	12	25	110	1	0.80	3.25
SD12030	12	30	110	1	0.85	3.25



**FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS
ACROSS THE MAJORITY OF THE UK MAINLAND.**



HOOK AND EYE BOLTS


Hook and eye bolts can be used with a variety of internal threaded fixings for static loads. Scaffold ring bolts, retaining eyes and eye plugs are used as part of scaffold restraint system.



FORGED HOOK BOLTS

**BRIGHT ZINC
PLATED**

✓ Forging Process Helps Prevent Hook Opening Out When Load Is Applied ✓ Minimum 5µm



M=Thread Diameter L_{th} =Thread Length


Part Number	Thread Diameter M	Thread Length mm L_{th}	Hook Diameter mm	Outside Hook Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
FHM06	6	50	8	22	50	3.12	56.77
FHM08	8	60	10	30	50	3.84	85.83
FHM10	10	73	12	36	25	7.38	152.37
FHM12	12	90	16	47	10	16.76	258.94



FORGED EYE BOLTS

**BRIGHT ZINC
PLATED**

✓ Forging Process Helps Offer Strength When Load Is Applied ✓ Minimum 5µm



M=Thread Diameter L_{th} =Thread Length


Part Number	Thread Diameter M	Thread Length mm L_{th}	Eye Diameter mm	Outside Eye Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
FEM06	6	50	10	19	50	3.12	77.52
FEM08	8	60	11	23	50	3.15	107.36
FEM10	10	73	14	28	25	6.22	164.19
FEM12	12	90	16	34	10	11.17	279.01



SCAFFOLD RING BOLTS

Used together with M16 drop in anchors or M16 internal threaded sockets for restraining scaffolding.

- Cracked Concrete Over C20/25 To C50/60
- Non-Cracked Concrete Over C20/25
- Tested To Excess Of 1275kgs

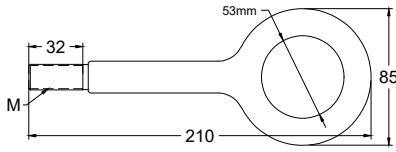


M=Thread Diameter

Part Number	Thread Diameter M	Thread Length mm	Eye Diameter mm	Overall Length mm	Quantity Per Box	Ship Wt.kg Per Each	Price £ Per Each
DSRBM16	16	32	53	210	1	0.60	5.38



SCAFFOLD RETAINING EYES

- Can Be Used In Concrete, Masonry, Natural Stone
- Re-Useable




L=Thread Length

Part Number	Thread Diameter mm	Thread Length mm L	Eye Internal Diameter mm	Overall Length mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SRE12120	12	60	24	120	20	17.20	185.19
SRE12160	12	60	24	160	10	20.40	222.22



SCAFFOLD EYE PLUGS

- Can Be Used In Concrete, Masonry, Natural Stone



d_0 =Anchor Hole Size L=Overall Length h_1 =Minimum Hole Depth


Part Number	Anchor Hole Size mm d_0	Overall Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SRP14100	14	100	115	20	0.90	16.67



HEAVY DUTY EXPANSION ANCHORS

A high-performance heavy-duty torque-controlled anchor with a three part expansion sleeve allowing for smaller spacings and edge distances.

- ✔ Fast And Secure Installation
- ✔ Three Way Expansion Sleeve
- ✔ Reaction To Fire Class A1
- ✔ High-Performance
- ✔ Through Fixing

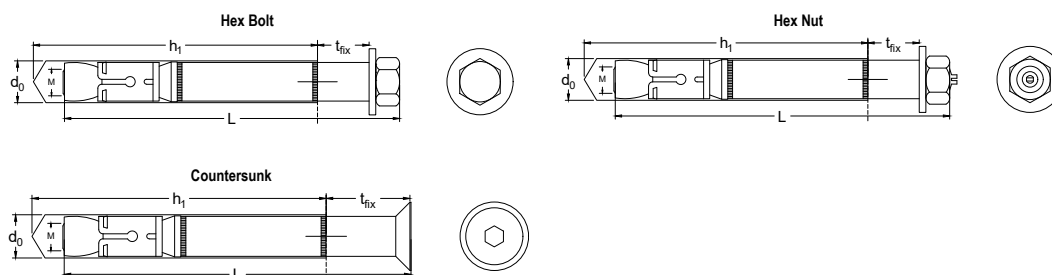

d_0 =Anchor Hole Size M =Thread Diameter L =Anchor Length t_{fix} =Maximum Fixture Thickness h_1 =Minimum Hole Depth



ETA OPTION 1 HEXAGON BOLT HEAVY DUTY ANCHORS BZP



- ✔ Concrete C20/25 To C50/60
- ✔ Cracked Concrete
- ✔ Non-Cracked Concrete
- ✔ Fire Resistance Loading
- ✔ Minimum 5µm

**BRIGHT ZINC
PLATED**

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JHD0610	10	6	75	10	65	50	5.50	129.57
JHD0630	10	6	95	30	65	50	7.50	140.02
JHD0650	10	6	115	50	65	50	8.30	147.78
JHD0810	12	8	85	10	80	50	9.90	163.01
JHD0830	12	8	105	30	80	50	10.50	183.91
JHD0850	12	8	125	50	80	25	11.70	197.34
JHD1015	15	10	106	15	95	25	12.50	236.45
JHD1025	15	10	116	25	95	25	15.50	249.89
JHD1045	15	10	136	45	95	25	18.00	290.49
JHD1210	18	12	117	10	105	20	21.50	362.74
JHD1220	18	12	127	20	105	20	24.50	421.26
JHD1240	18	12	147	40	105	20	29.50	443.05
JHD1270	18	12	177	70	105	20	30.50	499.77
JHD1610	24	16	130	10	130	10	45.50	755.93
JHD1620	24	16	150	20	130	10	52.50	757.42
JHD1650	24	16	180	50	130	10	58.50	877.44
JHD2030	28	20	192	30	160	5	93.33	1,424.68
JHD2060	28	20	222	60	160	5	107.50	1,683.53
JHD2460	32	24	262	60	180	5	144.20	4,269.28



ETA OPTION 1 STUD AND NUT HEAVY DUTY ANCHORS BZP



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Fire Resistance Loading
 Minimum 5µm

BRIGHT ZINC PLATED

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
NHD0810	12	8	90	10	80	50	6.60	168.38
NHD0830	12	8	110	30	80	50	8.00	183.31
NHD0850	12	8	130	50	80	25	10.00	198.83
NHD1015	15	10	111	15	95	25	12.80	240.93
NHD1025	15	10	121	25	95	25	14.00	258.84
NHD1045	15	10	141	45	95	25	16.00	295.86
NHD1210	18	12	122	10	105	20	20.50	382.14
NHD1220	18	12	132	20	105	20	22.00	412.30
NHD1240	18	12	152	40	105	20	25.50	463.35
NHD1270	18	12	182	70	105	20	30.50	514.10
NHD1620	24	16	157	20	130	10	47.00	809.97
NHD1650	24	16	187	50	130	10	55.00	901.03



ETA OPTION 1 COUNTERSUNK HEAD HEAVY DUTY ANCHORS BZP



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Fire Resistance Loading
 Minimum 5µm

BRIGHT ZINC PLATED

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Head Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLSK10/10	10	6	70	10	65	18	50	3.70	242.00
SLSK10/25	10	6	85	25	65	18	50	4.50	254.00
SLSK10/45	10	6	100	40	65	18	50	6.20	276.00
SLSK12/10	12	8	80	10	80	20	50	6.40	290.33
SLSK12/25	12	8	95	25	80	20	50	7.70	312.00
SLSK12/50	12	8	120	50	80	20	25	9.60	341.33
SLSK15/10	15	10	95	10	95	25	25	11.00	393.33
SLSK15/25	15	10	110	25	95	25	25	12.60	420.00
SLSK15/50	15	10	135	50	95	25	25	15.60	480.33
SLSK18/20	18	12	115	20	105	30	20	21.00	636.00
SLSK18/40	18	12	135	40	105	30	20	25.00	717.33



ETA OPTION 1 STUD AND NUT HEAVY DUTY ANCHORS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
 Cracked Concrete
 Non-Cracked Concrete
 Fire Resistance Loading
 Suitable For External Use And Marine Environments

A4-316 STAINLESS STEEL

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLB12/10SS	12	8	90	10	80	50	6.40	1,035.64
SLB12/30SS	12	8	110	30	80	50	7.70	1,174.96
SLB14/15SS	15	10	111	15	95	25	11.00	1,538.86
SLB14/25SS	15	10	121	25	95	25	12.60	1,680.18
SLB18/20SS	18	12	132	20	105	20	23.00	2,407.65
SLB18/40SS	18	12	152	40	105	20	25.00	2,638.19



ETA OPTION 1 HEXAGON BOLT HEAVY DUTY ANCHORS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Fire Resistance Loading
- Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
JHD0810SS	12	8	85	10	80	50	6.62	1,035.64
JHD0830SS	12	8	105	30	80	50	8.20	1,174.96
JHD0850SS	12	8	125	50	80	25	9.88	1,531.23
JHD1015SS	15	10	106	15	95	25	13.24	1,538.86
JHD1025SS	15	10	116	25	95	25	14.36	1,680.18
JHD1045SS	15	10	136	45	95	25	16.80	2,248.09
JHD1210SS	18	12	117	10	105	20	20.90	2,407.65
JHD1225SS	18	12	127	20	105	20	22.65	2,638.19
JHD1240SS	18	12	147	40	105	20	26.05	2,862.44



ETA OPTION 1 COUNTERSUNK HEAD HEAVY DUTY ANCHORS A4 STAINLESS STEEL



- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Fire Resistance Loading
- Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Thread Diameter M	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Head Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLSK12/10SS	12	8	80	10	80	20	50	6.02	1,640.37
SLSK12/25SS	12	8	95	25	80	20	50	7.30	1,750.83
SLSK12/50SS	12	8	120	50	80	20	25	9.32	1,842.72
SLSK15/15SS	15	10	100	15	95	25	25	11.16	2,061.66
SLSK15/25SS	15	10	110	25	95	25	25	13.16	2,185.06
SLSK15/50SS	15	10	135	50	95	25	25	15.84	2,793.44
SLSK18/20SS	18	12	115	20	105	30	20	19.95	3,914.33
SLSK18/40SS	18	12	135	40	105	30	20	23.10	4,146.21

JCP Construction Products
REBAR Calculation Program

JCP Construction Products
ANCHOR Calculation Program

The JCP Anchor Calculation Program is free to download via www.jcpfixings.co.uk




BLIND BOLTS

BLINDBOLT® The Blind Bolt® is a constructional cavity fixing, suitable for fixing to steel sections where access is available from one side only, with the unique design reducing installation time and expense.

HDBOLT® With its expanding base and unique pin locking mechanism, the Heavy Duty Blind Bolt is the ideal fixing solution between heavyweight steel sections, with the unique design reducing installation time and expense.

TWBOLT® The Thin Wall Bolt is for blind fixing to lightweight sheet steel or cladding material, offering a neat, low profile head with no stud protrusion.

- ✔ Fast And Secure Installation
- ✔ Reaction To Fire Class A1
- ✔ High-Performance
- ✔ Installation And Removal Video's Available

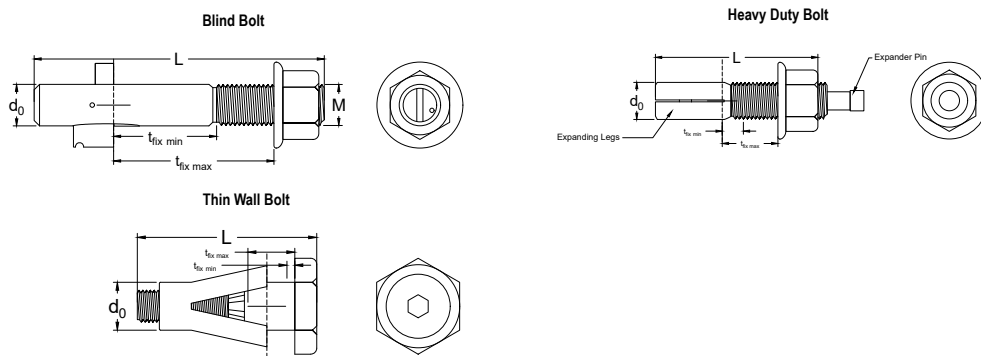

d_0 =Hole Diameter M=Bolt Size L=Anchor Length $t_{fix\ min}$ =Minimum Fixture Thickness $t_{fix\ max}$ =Maximum Fixture Thickness

BLIND BOLTS GEOMET 500B

GEOMET 500B



- ✔ Removable
- ✔ Property Class 10.9
- ✔ Design Values To BS 5950-1
- ✔ Design Values To EN 1993-1-8
- ✔ Re-Useable
- ✔ Horizontal And Vertically Down Positions

Part Number	Hole Diameter mm d_0	Bolt Size M	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BB08050ZF	9	8	50	9	24	50	2.00	2.50
BB10060ZF	11	10	60	10	30	40	4.00	2.77
BB10095ZF	11	10	95	25	65	20	7.00	4.23
BB10130ZF	11	10	130	55	100	20	9.00	4.38
BB14075ZF	15	14	75	14	35	25	10.00	5.75
BB14125ZF	15	14	125	28	82	20	15.00	7.47
BB14185ZF	15	14	185	75	142	15	19.00	11.08
BB30140ZF	32	30	140	27	60	5	94.00	28.57



BLIND BOLTS HDG

HOT DIPPED
GALVANISED

- Removable
- Property Class 10.9
- Design Values To BS 5950-1
- Design Values To EN 1993-1-8
- Re-Useable
- Horizontal And Vertically Down Positions

Part Number	Hole Diameter mm d_0	Bolt Size M	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BB12070HDG	13	12	70	12	35	20	8.00	3.95
BB12120HDG	13	12	120	30	85	25	11.00	5.80
BB12180HDG	13	12	180	80	140	20	17.00	6.98
BB16090HDG*	17	16	90	13	43	20	17.00	7.10
BB16130HDG*	17	16	130	40	75	15	21.00	9.80
BB16180HDG*	17	16	180	55	125	10	29.00	12.77
BB20110HDG*	22	20	110	21	56	10	33.00	13.47
BB20140HDG*	22	20	140	21	86	8	40.00	14.63
BB20180HDG*	22	20	180	80	120	10	45.00	16.25
BB20250HDG*	22	20	250	130	185	10	60.00	20.57
BB24130HDG*	26	24	130	21	66	5	52.00	20.47

* It is strongly recommended to use the installation gauge when installing these bolts.



BLIND BOLTS A4 STAINLESS STEEL

A4-70
STAINLESS STEEL

- Removable
- Horizontal And Vertically Down Positions
- Re-Useable

Part Number	Hole Diameter mm d_0	Bolt Size M	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BB08050A4	9	8	50	9	24	50	2.00	6.73
BB10060A4	11	10	60	10	30	40	4.00	9.00
BB12090A4	13	12	90	12	55	20	9.00	10.52
BB16100A4	17	16	100	13	53	20	18.00	17.87



HEAVY DUTY BLIND BOLTS GEOMET 500B

GEOMET 500B

- Property Class 8.8
- No Over-Sized Hole Required
- Increased Assembly Efficiency
- Unique Pin Locking Design
- 1000 Hour Salt Spray Protection

Part Number	Hole Diameter mm d_0	Bolt Size M	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BBHD0845ZF	8	8	45	7	25	50	2.00	2.53
BBHD1045ZF	10	10	45	7	25	40	4.00	2.80
BBHD1060ZF	10	10	60	7	40	40	4.00	2.87
BBHD1245ZF	12	12	45	8	22	20	7.00	3.13
BBHD1260ZF	12	12	60	8	37	20	7.00	3.32
BBHD1275ZF	12	12	75	8	52	20	11.00	4.77
BBHD1660ZF	16	16	60	12	30	20	13.00	6.95
BBHD1675ZF	16	16	75	12	45	20	15.00	7.12
BBHD2070ZF	20	20	70	15	32	10	23.00	12.02
BBHD2085ZF	20	20	85	15	47	10	28.00	12.70



HEAVY DUTY BLIND BOLTS A4 STAINLESS STEEL

**A4-70
STAINLESS STEEL**

- No Over-Sized Hole Required
 Increased Assembly Efficiency
 Unique Pin Locking Design

Part Number	Hole Diameter mm d_0	Bolt Size M	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BBHD0845A4	8	8	45	7	25	50	2.00	4.95
BBHD1045A4	10	10	45	7	25	40	4.00	5.88
BBHD1060A4	10	10	60	7	40	40	4.00	7.08
BBHD1245A4	12	12	45	8	22	20	7.00	7.18
BBHD1260A4	12	12	60	8	37	20	7.00	8.98
BBHD1660A4	16	16	60	12	30	20	13.00	15.78
BBHD2070A4	20	20	70	15	32	10	23.00	21.55



THIN WALL BLIND BOLTS

ZINC NICKEL

- No Over-Sized Hole Required
 High Shear Capacity
 Low Profile Head

Part Number	Hole Diameter mm d_0	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BBTW0810ZN	8	35	2	10	100	1.50	2.43
BBTW0816ZN	8	40	8	16	100	1.65	3.07
BBTW1010ZN	10	40	2	10	50	1.30	3.17
BBTW1016ZN	10	45	8	16	50	1.40	3.87
BBTW1310ZN	13	45	2	10	50	2.50	6.67
BBTW1316ZN	13	50	8	16	50	2.80	7.73



THIN WALL BLIND BOLTS A2 STAINLESS STEEL

**A2-70
STAINLESS STEEL**

- No Over-Sized Hole Required
 High Shear Capacity
 Low Profile Head

Part Number	Hole Diameter mm d_0	Length mm L	Min Fixture Thickness mm $t_{fix\ min}$	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
BBTW0810SS	8	35	2	10	100	1.50	4.00
BBTW0816SS	8	40	8	16	100	1.65	4.63
BBTW1010SS	10	40	2	10	50	1.62	5.20
BBTW1016SS	10	45	8	16	50	1.86	6.40
BBTW1310SS	13	45	2	10	50	1.58	9.68
BBTW1316SS	13	50	8	16	50	1.71	11.77



BLINDBOLT®

THE SMART SOLUTION FOR STEELWORK CONNECTIONS


A simple yet ingenious solution for connections with access from one side only.

Blind bolts are a fully tested assembly for 'blind' fixings to hollow sections and other applications with one-sided access, carrying shear and/or tension. Simple to install, check and tighten – and remove if required.

- Design resistances in shear, bearing and tension for use with BS 5950-1 or BS EN 1993-1-8
- Available in sizes M8 to M30 in Property Class 10.9 Geomet 500B
- Available in sizes M12 to M24 in Hot Dipped Galvanised
- Available in sizes M8 to M16 in A4-70 Stainless Steel



- Quick and easy to install from one side
- Designed for ordinary clearance holes
- A true removable blind fixing available for structural connections
- Fully tested by the SCI



Watch the downward installation video here



Watch the vertical installation video here

Also Available

HDBOLT

- Geomet 500B 1000 Hour Salt Spray Protected
- Available in sizes M8 to M20 in Property Class 8.8 Geomet 500B
- Available in sizes M8 to M20 in A4-70 Stainless Steel



TWBOLT

- Available in sizes 8mm to 13mm in Zinc Nickel
- Available in sizes 8mm to 13mm in A2-70 Stainless Steel

APPLICATIONS

- Hollow sections
- Girders and beams
- Masonry support systems
- Cladding and façades
- Marine



Full technical details, design resistances and SCI report available from www.blindbolt.co.uk



INJECTION RESINS AND GLASS CAPSULES

Chemical Anchors used for installing threaded studs, rebar or internal threaded sockets for structural applications.

- High Performance
- Good, Better, Best Options Available

J-FIX PURE EPOXY RESIN 385ML



Pure epoxy resin is a 3:1 ratio resin with very high load capacities, and is approved for use in contact with potable (drinking) water. Suitable for use in the majority of base materials.

- ETA Option 1 Approved
- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JF375E	Red Pure Epoxy Resin in Cartridge + 1 Mixer Nozzle	385ml	1/10	0.75	22.85

J-FIX ULTRA-BOND 100 EPOXY RESIN **NEW**



Ultra-Bond 100 epoxy resin is a formulation derived from pure epoxy with very high bond strength. The two-component chemical anchoring injection system in a 3:1 ratio can achieve high loads and is used for high-performance structural applications where loading is critical.

- ETA Option 1 Approved
- Our Highest-Strength Resin
- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JF585E	Red Ultra-Bond Epoxy Resin in Cartridge + 1 Mixer Nozzle	585ml	10	1.05	32.75

J-FIX VINYLESTER RESIN



Pure vinylester resin is a high strength resin, which can be used in dry, damp, and flooded holes, and comes complete with a WRAS Approval number.

- ETA Option 1 Approved
- Concrete C20/25 To C50/60
- Cracked Concrete
- Non-Cracked Concrete
- Styrene Free
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JFV380SF	Vinylester High Load Resin in Cartridge + 1 Mixer Nozzle	410ml	1/12	0.79	16.19
JFV300SF	Vinylester High Load Resin in Cartridge + 1 Mixer Nozzle	300ml	1/12	0.70	12.48

NEW

JCP CONSTRUCTION PRODUCTS®

J-FIX ULTRA-BOND 100 EPOXY RESIN



100 YEAR
Anchor Service Life

ETA Option 1 approved, the J-Fix Ultra Bond 100 is suitable for high loads featuring large diameters and deep embedment. Longer working times make it ideal for large holes and high temperatures.

It is also approved for use under seismic actions C1 and C2. Offering high durability and resistance to chemicals, Ultra-Bond 100 is a low-emitting material and qualified to be categorised as LEED v4 and v4.1 Beta according to ISO 16000, EN 16516, ISO 11890-2 and ASTM D2369 testing standards.







- ✓ 24 Month Shelf Life From Date of Manufacture
- ✓ Ideal for Rotary Hammer Drilled Dry and Wet Holes
- ✓ Longer Working Times for Large Holes and High Temperatures

J-FIX VINYLESTER FAST CURE WINTER GRADE RESIN



Winter grade vinylester resin can be used in temperatures down to -20°C or as a fast cure resin in warmer temperatures.

- ✓ ETA Option 1 Approved
- ✓ Concrete C20/25 To C50/60
- ✓ Cracked Concrete
- ✓ Non-Cracked Concrete
- ✓ Styrene Free
- ✓ Dry/Wet/Flooded Holes
- ✓ Expansion Free
- ✓ Close Spacing And Edge Distance
- ✓ Winter Grade



Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JFEA410SFW	Winter Grade Vinylester Resin in Cartridge + 1 Mixer Nozzle	410ml	1/12	0.79	17.33

J-FIX EPOXY ACRYLATE RESIN



Epoxy acrylate resin is suitable for use in non-cracked concrete, other base materials and in damp conditions.

- ETA Option 7 Approved
- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Styrene Free
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JFEA380SF	Grey Styrene Free Epoxy Acrylate Resin in Cartridge + 1 Mixer Nozzle	410ml	1/12	0.79	13.37

J-FIX POLYESTER STYRENE FREE RESIN



Polyester styrene free resin is a general purpose resin suitable for brickwork, most natural stone, and concrete.

- ETA Option 7 Approved
- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Styrene Free
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JF380PSF	Grey Styrene Free Polyester Resin in Cartridge + 1 Mixer Nozzle	410ml	1/12	0.79	10.81
JFEA300SF	Grey Styrene Free Polyester Resin in Cartridge + 1 Mixer Nozzle	300ml	1/12	0.69	9.26
JF150P	Grey Styrene Free Polyester Resin in Cartridge + 2 Mixer Nozzle	150ml	1/12	0.42	8.63



J-FIX POLYESTER RESIN



Polyester resin is a general purpose resin suitable for brickwork, most natural stone and concrete.

- ETA Option 7 Approved
- Concrete C20/25 To C50/60
- Non-Cracked Concrete
- Styrene Free
- Dry/Wet/Flooded Holes
- Expansion Free
- Close Spacing And Edge Distance

Part Number	Description	Volume	Quantity Unit/Box	Ship Wt.Kg Each	Price £ Per Each
JF380P	Grey Polyester Resin in Cartridge + 1 Mixer Nozzle	410ml	1/12	0.79	9.93

APPROXIMATE RESIN FIXING PER CARTRIDGE

Thread Diameter mm	Hole Size mm	Hole Depth mm	410ml	375ml	300ml	150ml
M8	10	80	78	71	57	25
M10	12	90	52	48	38	17
M12	14	110	34	31	25	11
M16	18	125	22	20	16	7
M20	22	170	11	10	8	3
M24	26	210	7	6	5	2



J-FIX SPIN IN GLASS CAPSULES



The spin in glass capsule anchor contains a quartz aggregate and is used with threaded studs to provide a stress free anchorage in concrete, offering exceptional load capability.

- ETA Option 7 Approved
- Non-Cracked Concrete
- Good Resistance To Vibrating Loads
- Can Be Used In Wet And Corrosive Environment
- Expansion Free
- Epoxy Acrylate

Part Number	Thread Diameter mm	Length mm	Max Fixture Thickness mm	Hole Diameter mm	Min Hole Depth mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JCAPSM08	8	80	9	10	80	10	1.20	113.10
JCAPSM10	10	80	11	12	90	10	1.30	113.10
JCAPSM12	12	95	13	14	110	10	2.40	115.10
JCAPSM16	16	95	17	18	125	10	3.30	130.71
JCAPSM20	20	160	17	22	170	10	10.90	246.35
JCAPSM24	24	175	22	26	210	10	14.10	284.00
JCAPSM30	30	230	25	32	280	5	28.20	530.46

J-FIX HAMMER IN GLASS CAPSULES



The epoxy acrylate hammer in capsules are suitable for use in solid concrete and natural stone, and can be used with reinforcing bar or threaded rods, achieving high loads by using two capsules at double embedment depth.

- Increased Embedment Depth
- Expansion Free
- Exact Resin Quantity Per Hole
- Rapid Installation
- For Use With Rebar/Flat Ended Studs

Part Number	Rebar Nominal Diameter mm	Thread Diameter mm	Capsule Diameter mm	Capsule Length mm	Min Hole Depth mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JCAPHM10	10	10	11	90	100	10	1.30	133.23
JCAPHM12	12	12	13	110	110	10	2.40	141.13
JCAPHM16	16	16	17	125	125	10	3.30	159.39
JCAPHM20	20	20	22	175	200	6	10.90	306.49
JCAPHM24	25	24	24	210	250	6	14.10	359.01
JCAPHM30	32	30	33	265	300	6	28.20	681.50



ANCHORING CEMENTS

ROCKITE (INTERIOR GRADE)

Rockite is a fast-setting hydraulic expansion cement. When mixed with water it provides a compound that can be used internally for grouting, anchoring or patching. 1kg (2.2lb) dry powder weight fills approximately 700 cubic centimetres.

- Fast Setting
- Crack-Free Finish
- Mix With Water
- Expanding

Part Number	Description	Quantity	Ship Wt.Kg Each	Price £ Per Each
57 9020	0.45kg (1lb) Carton	1	0.45	3.70
57 9002	2.27kg (5lb) Carton	1	2.27	14.21
57 9003	4.54kg (10lb) Pail	1	4.54	26.49
57 9004	22.70kg (50lb) Carton	1	22.70	100.85
57 9005	22.70kg (50lb) Pail	1	22.70	113.46



KWIXSET (EXTERIOR GRADE)

Kwixset is a fast-setting hydraulic type cement for external or internal use.

- Fast Setting
- Ideal For External Or Internal Use
- No Further Treatment Required For External Use
- Expanding



Part Number	Description	Quantity	Ship Wt.Kg Each	Price £ Per Each
57 9011	11.35kg (25lb) Pail	1	11.35	72.17
57 9012	22.70kg (50lb) Pail	1	22.70	135.93



Caution: Rockite and Kwixset have very strong expansion properties which generate the high tensile loads that can be achieved and as such their use in hollow bricks or blocks is not recommended.



THREADED STUDS AND SOCKETS

For use with J-Fix Spin in Glass Capsules or J-Fix Injection Resin Systems.

- Plain Ended For Injection Resin Only
- Chisel Ended For Injection Resin And Glass Capsules
- Chisel Ended Studs Come Complete With Setting Tool For Glass Capsules

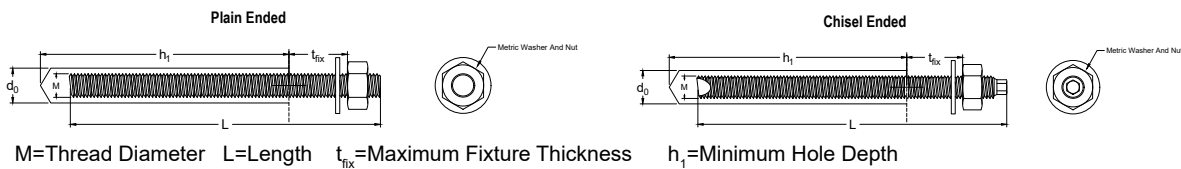

M=Internal Thread Diameter L_{th}=Internal Thread Length d₀=Hole Diameter L=Anchor Length h₁=Minimum Hole Depth

J-FIX STUDS BZP



- Chisel Point
- Grade 5.8 Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment
- Minimum 5µm

BRIGHT ZINC PLATED

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t _{fix}	Min Hole Depth mm h ₁	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110	8	110	18	80	10	4.30	35.67
JSTUD10130	10	130	25	90	10	7.75	51.52
JSTUD12160	12	160	34	110	10	13.30	77.79
JSTUD16190	16	190	45	125	10	28.50	153.45
JSTUD20260	20	260	55	170	10	62.00	299.47
JSTUD24300	24	300	55	210	5	102.00	494.38
JSTUD30380	30	380	55	280	5	164.00	980.58



J-FIX STUDS PLAIN ENDED BZP

BRIGHT ZINC PLATED

- Plain Ended
- Grade 5.8 Threaded Stud
- Minimum 5µm

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fx}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08150PE	8	150	62	80	10	4.00	40.22
JSTUD10105PE	10	105	5	90	10	7.20	59.11
JSTUD10150PE	10	150	50	90	10	7.70	62.99
JSTUD10200PE	10	200	100	90	10	11.10	75.83
JSTUD12110PE	12	110	-	-	10	9.90	63.34
JSTUD12150PE	12	150	27	110	10	12.70	85.58
JSTUD12200PE	12	200	77	110	10	16.20	107.25
JSTUD16110PE	16	110	-	-	10	18.50	131.36
JSTUD16250PE	16	250	104	128	10	36.70	217.58
JSTUD16350PE	16	350	204	128	10	49.70	274.03
JSTUD20200PE	20	200	9	170	10	48.40	299.16
JSTUD20400PE	20	400	209	170	10	89.20	475.16



J-FIX STUDS ZYP

ZINC AND YELLOW PLATED

- Chisel Point
- High Tensile Grade 8.8 Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment
- Minimum 5µm

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fx}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110HT	8	110	18	80	10	4.30	41.73
JSTUD10130HT	10	130	25	90	10	7.75	61.58
JSTUD12160HT	12	160	34	110	10	13.30	95.28
JSTUD16190HT	16	190	45	125	10	28.50	188.76
JSTUD20260HT	20	260	55	170	10	62.00	378.27
JSTUD24300HT	24	300	55	210	5	102.00	614.16
JSTUD30380HT	30	380	55	280	5	164.00	1,221.19



J-FIX STUDS GALV

HOT DIPPED GALVANISED

- Chisel Point
- Grade 5.8 Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment
- BS EN ISO 1461:2009

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fx}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110G	8	110	18	80	10	4.40	42.42
JSTUD10130G	10	130	25	90	10	7.90	64.95
JSTUD12160G	12	160	34	110	10	13.50	97.61
JSTUD16190G	16	190	45	125	10	29.00	190.43
JSTUD20260G	20	260	55	170	5	63.40	374.60
JSTUD24300G	24	300	55	210	5	104.20	605.75



FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS ACROSS THE MAJORITY OF THE UK MAINLAND.



J-FIX STUDS GALV

HOT DIPPED GALVANISED

- Chisel Point High Tensile Grade 8.8 Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment BS EN ISO 1461:2009

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110GHT	8	110	18	80	10	4.40	58.00
JSTUD10130GHT	10	130	25	90	10	7.90	86.05
JSTUD12160GHT	12	160	34	110	10	13.50	127.53
JSTUD16190GHT	16	190	45	125	10	29.00	245.79
JSTUD20260GHT	20	260	55	170	5	63.40	497.64
JSTUD24300GHT	24	300	55	210	5	104.20	840.52



J-FIX STUDS A2 STAINLESS STEEL

A2-304 STAINLESS STEEL

- Chisel Point Grade 70 Stainless Steel Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment Suitable For External Use

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110SS	8	110	18	80	10	4.32	117.73
JSTUD10130SS	10	130	25	90	10	7.77	193.99
JSTUD12160SS	12	160	34	110	10	13.30	324.93
JSTUD16190SS	16	190	45	125	10	28.50	675.13
JSTUD20260SS	20	260	55	170	5	62.00	1,392.74
JSTUD24300SS	24	300	55	210	5	102.00	2,264.65



J-FIX STUDS A4 STAINLESS STEEL

A4-316 STAINLESS STEEL

- Chisel Point Grade 70 Stainless Steel Threaded Stud
- Depth Mark Indicates Embedment Depth At Standard Embedment Suitable For External Use And Marine Environments

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08110SSA4	8	110	18	80	10	4.32	155.43
JSTUD10130SSA4	10	130	25	90	10	7.77	266.98
JSTUD12160SSA4	12	160	34	110	10	13.30	441.80
JSTUD16190SSA4	16	190	45	125	10	28.50	921.46
JSTUD20260SSA4	20	260	55	170	5	62.00	1,936.63
JSTUD24300SSA4	24	300	55	210	5	102.00	3,189.50



Available from
www.owlett-jaton.com

- Full range of allthread studs in sizes M4 to M12
- Studding in 1 metre and 3 metre lengths

Owlett-Jaton



J-FIX STUDS PLAIN ENDED A4 STAINLESS STEEL



- Plain Ended Grade 70 Stainless Steel Threaded Stud
- Suitable For External Use And Marine Environments

**A4-316
STAINLESS STEEL**

Part Number	Thread Diameter M	Length mm L	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JSTUD08150PESS	8	150	62	80	10	4.00	182.52
JSTUD10105PESS	10	105	5	90	10	7.20	220.61
JSTUD10150PESS	10	150	50	90	10	7.70	289.01
JSTUD10200PESS	10	200	100	90	10	11.10	356.54
JSTUD12110PESS	12	110	-	-	10	9.90	326.46
JSTUD12150PESS	12	150	27	110	10	12.70	399.85
JSTUD12200PESS	12	200	77	110	10	16.20	500.48
JSTUD16110PESS	16	110	-	-	10	18.50	584.87
JSTUD16250PESS	16	250	104	128	10	36.70	1,096.60
JSTUD16350PESS	16	350	204	128	10	49.70	1,444.78
JSTUD20200PESS	20	200	9	170	10	48.40	1,459.17
JSTUD20400PESS	20	400	209	170	10	89.20	2,622.10



INJECTION RESIN INTERNALLY THREADED SOCKETS BZP

**BRIGHT ZINC
PLATED**

- For Use In Solid Masonry/Brickwork Provides A Flush Fixing Use With Set Screws, Bolts Or Threaded Rod
- Allows Removal Of Bolt To Leave Re-Useable Socket Minimum 5µm

Part Number	Internal Thread M	Internal Thread Length mm L_{th}	Outside Diameter mm	Hole Diameter mm d_o	Anchor Length mm L	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
INJM06	6	20	8	10	50	60	10	1.20	62.11
INJM08	8	25	12	14	80	90	10	4.20	89.09
INJM10	10	30	14	16	80	90	10	4.60	107.20
INJM12	12	30	16	18	80	90	10	5.40	122.83



INTERNAL THREADED SOCKETS BZP

**BRIGHT ZINC
PLATED**

- Provides A Flush Fixing Expansion Free High Loads
- Permanent Threaded Socket Allows Removal Of Bolt To Leave Re-Useable Socket Minimum 5µm

Part Number	Internal Thread M	Internal Thread Length mm L_{th}	Outside Diameter mm	Hole Diameter mm d_o	Anchor Length mm L	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
ITSM08BZP	8	30	12	14	90	90	10	4.00	100.19
ITSM10BZP	10	35	16	18	90	90	10	7.00	143.23
ITSM12BZP	12	40	20	25	90	90	10	16.00	203.04
ITSM16BZP	16	40	24	28	125	125	10	29.00	379.12



INTERNAL THREADED SOCKETS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- Provides A Flush Fixing Suitable for External Use Expansion Free High Loads
- Permanent Threaded Socket Allows Removal Of Bolt To Leave Re-Useable Socket Suitable For External Use

Part Number	Internal Thread M	Internal Thread Length mm L_{th}	Outside Diameter mm	Hole Diameter mm d_o	Anchor Length mm L	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
ITSM08SS	8	30	12	14	90	90	10	4.00	291.77
ITSM10SS	10	35	16	18	90	90	10	7.00	454.72
ITSM12SS	12	40	20	25	90	90	10	16.00	669.48
ITSM16SS	16	40	24	28	125	125	10	29.00	1,298.19



INTERNAL THREADED SOCKETS A4 STAINLESS STEEL

**A4-316
STAINLESS STEEL**

- ✔ Provides A Flush Fixing
- ✔ Suitable For External Use And Marine Environments
- ✔ Expansion Free
- ✔ High Loads
- ✔ Permanent Threaded Socket
- ✔ Allows Removal Of Bolt To Leave Re-Useable Socket

Part Number	Internal Thread M	Internal Thread Length mm L _{th}	Outside Diameter mm	Hole Diameter mm d ₀	Anchor Length mm L	Min Hole Depth mm h ₁	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
ITSM08SSA4	8	30	12	14	90	90	10	4.00	363.43
ITSM10SSA4	10	35	16	18	90	90	10	7.00	581.57
ITSM12SSA4	12	40	20	25	90	90	10	16.00	868.04
ITSM16SSA4	16	40	24	28	125	125	10	29.00	1,722.97



INJECTION RESIN ACCESSORIES

A range of injection resin accessories.

- ✔ For Use With The J-Fix Injection Resin Systems
- ✔ Compatible With Other Resins

INJECTION TOOLS

- ✔ Easy To Use
- ✔ Hand Operated

Part Number	Description	Ship Wt.Kg Per Each	Price £ Per Each
JTOOL380	For Any 410ml Cartridge	1.30	25.79
JTOOL300	For Any 150ml and 300ml Cartridge	1.00	13.28
JTOOL150	For Any 150ml and 300ml Cartridge	0.60	6.58
JTOOL375	For JF375E 375ml Cartridge	1.40	58.21
JTOOL600	For JF585E 585ml Cartridge	1.85	65.00



INJECTION TOOL ACCESSORIES

- ✔ Mixer Nozzles
- ✔ Extension Tube

Part Number	Description	Ship Wt.Kg Per Each	Price £ Per Each
JMN130	Mixer Nozzle	1.00	1.00
JMN190	Extension Tube for JMN130	1.00	0.90
JMN150E	Mixer Nozzle for JF375E Pure Epoxy	1.00	1.65





NYLON SLEEVE WITH STUD ALIGNMENT COLLAR

- For Use With Injection Resin In Hollow Bricks And Blocks
- Perforated, Allowing The Resin To Evenly Permeate
- Stud Alignment Collar Aids With Accurate Positioning Of The Stud

Part Number	Hole Diameter mm	Sleeve Size mm	For Stud Size M	Quantity Per Bag	Ship Wt.Kg Per 100	Price £ Per 100
JNSLM08/12	16	15 x 85	8-12	10	0.18	22.89
JNSLM08/12L	16	15 x 130	8-12	10	0.18	25.94
JNSLM16	22	20 x 85	16	10	0.18	30.83



WIRE MESH SLEEVE

- Perforated, Allowing The Resin To Evenly Permeate
- Can Be Cut On Site To Required Length

Part Number	Hole Diameter mm	Inside Diameter mm	For Stud Size M	Length mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
JMMSM08	12	8.7	8	1000	1	6.00	7.22
JMMSM10/12	16	12.5	10-12	1000	1	8.00	6.94
JMMSM16	22	18	16	1000	1	10.00	6.72
JMMSM20	26	22	20	1000	1	12.00	7.89

WIRE CLEANING BRUSHES

- Cleaned Surfaces Ensure Optimum Bond Strength Of Fixing
- Hand Operated

Part Number	Brush Diameter mm	Pack Quantity	Price £ Per Each
CB08	8	1	4.62
CB10	10	1	6.05
CB12	12	1	6.43
CB16	16	1	7.14
CB20	20	1	7.62
CB25	25	1	7.38
CBW30	30	1	8.10
CBFW25	FLAT	1	8.10



Round Wire Brush

Flat Brush



BLOW OUT PUMP

Used to remove dust from holes prior to applying J-Fix Injection Resin Systems.

- Should Be Used After Application Of Round Wire Cleaning Brush
- Hand Operated

Part Number	Hole Diameter mm	Pack Quantity	Price £ Per Each
BOP1	10+	1	10.95



CRACK STITCHING ACCESSORIES

A range of crack stitching accessories for use when permanently repairing vertical or stepped cracks in masonry walls.

- Stabilises the Structure
- Helps Prevent Against Further Cracking
- Preserves Structural Integrity
- Non-Disruptive Repair Method

CRACK STITCH TWIST STARTER KIT

A complete system for reinforcing masonry and crack stitching.

KIT CONTAINS:

- 10 Lengths of 6mm x 1000mm Stitching Bar
- 1 x 3ltr Tub of Cementitious Grout
- 1 x 9.5mm Nozzle
- 1 x Crack Stitching Pointing Gun
- 1 x Mixing Paddle
- 1 x Finger Trowel

- Eliminates The Need To Rebuild A Wall
- Absorbs Further Localised Stress
- Minimises The Likelihood Of Further Cracking



Part Number	Price £ Per Each
CSKIT	261.83

POINTING GUN

Crack-stitching pointing gun comes complete with cartridge, cone, and mortar nozzle.

- Enables Accurate Grout Application, Reducing Waste
- Hand Operated



Part Number	Description	Price £ Per Each
CSGUN	Crack Stitching Gun	65.63



MIXING PADDLE

For mixing grout, with a hexagon shaft ideal for power tool application.

- Quickly And Easily Mixes Grout
- Power-Tool Application

Part Number	Description	Price £ Per Each
CSMP	Mixing Paddle	11.04

STITCHING BAR

**A2-304
STAINLESS STEEL**

1 metre bar for use as masonry reinforcement and crack stitching.

- Eliminates The Need To Rebuild A Wall
- Absorbs Further Localised Stress
- Minimises The Likelihood Of Further Cracking

Part Number	Size	Quantity Per Box	Price £ Per Each
CS061000	6mm x 1000mm	10	6.42
CS081000	8mm x 1000mm	10	8.67



CEMENTITIOUS GROUT

Cementitious grout for use in crack stitching.

- Gives Excellent Flow For Easy Application
- Low Liquid To Powder Ratio Provides A Thixotropic Grout
- Free From Chlorides And Nitrates

Part Number	Size	Price £ Per Each
CSGROUT	3 Litre Tub	57.00



PU FOAMS AND ACCESSORIES

Ready-to-use construction foams, sealants and accessories for a wide variety of construction applications.

- Ready-To-Use
- Gun Grade Options
- Fire Resistance Options
- Effective Cavity Filling

B3 RATED EXPANDING FOAM

B3 rated expanding foam is a one-part, self-expanding, ready-to-use polyurethane construction foam designed for filling irregular gaps.

- Good Volume Expansion For Effective Filling
- Hand Held Aerosol And Gun Grade Cans
- Low Curing Pressure Avoids Deformation Of Building Elements
- CFC Free Propellant
- Excellent Adhesion
- High Thermal And Acoustic Insulation
- Excellent Mounting Capabilities
- Excellent Stability

Part Number	Description	Volume	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JF750B3H	Grade B3 Hand Held Expanding Foam + 1 Nozzle	750ml	1/12	0.84	9.01
JF750B3G	Grade B3 Gun Applied Expanding Foam	750ml	1/12	0.84	9.34



B2 RATED EXPANDING FOAM

B2 rated expanding foam is a one-part, self-expanding, ready-to-use polyurethane construction foam suitable for use when joints must conform to BS EN ISO 471:2003 + A1:2007 (Part 20) DIN4102 (Part 1).

- Good Volume Expansion For Effective Filling
- Hand Held Aerosol And Gun Grade Cans
- High Thermal And Acoustic Insulation
- CFC Free Propellant
- Excellent Adhesion
- Excellent Stability
- Excellent Mounting Capabilities

Part Number	Description	Volume	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JF750B2H	Grade B2 Hand Held Expanding Foam + 1 Nozzle	750ml	1/12	0.84	10.76
JF750B2G	Grade B2 Gun Applied Expanding Foam	750ml	1/12	0.84	10.76



JCP foam is a one part construction foam designed for filling irregular gaps. All foams are supplied with protective gloves included. For B2 Foams to achieve a fire rating class they must be used in conjunction with an approved fire rated sealant.

B1 FIRE STOP EXPANDING FOAM

B1 rated expanding foam is a one-part, self-expanding, ready-to-use polyurethane construction foam designed for sealing joints in walls and service openings to prevent the passage of smoke and fire. For improved fire resistance use in conjunction with JFIRESIL.



- Good Volume Expansion For Effective Filling
- Hand Held Aerosol And Gun Grade Cans
- Excellent Heat Resistance
- Can Provide Up To 4 Hours Fire Resistance
- High Thermal And Acoustic Insulation
- Resistant To Mould And Fungal Attack

Part Number	Description	Volume	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JF750B1H	Grade B1 Hand Held Expanding Foam + 1 Nozzle	750ml	1/12	0.84	12.71
JF750B1G	Grade B1 Gun Applied Expanding Foam	750ml	1/12	0.84	12.71



B1 FIRE SEALANT

A high performance, professional quality, ready-to-use sealant.



- Filling Of Cavities
- Sealing Of Insulation Board

Part Number	Description	Volume	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JFIRESIL	Silicone	290	1/12	0.34	11.88



The JCP assessment document (ETA21/0413) is based on European Assessment Document EAD 350141-00-1106 "Fire Stopping and Fire Sealing Products. Linear Joint and Sealing Gaps".



JCP FIRE STOP SYSTEM

IDEAL FOR FILLING AND SEALING JOINTS AND GAPS WHICH REQUIRE FIRE-RESISTANT PROPERTIES.

B1 RATED FOAM AND SILICONE SEALANT/ADHESIVE



The B1 foam and silicone sealant (in accordance with DIN 4102-1) form an excellent adhesion to most building materials. As a system, the JCP B1 foam and silicone can be used where a fire resistance up to 4 hours is required (EI 240).



- ▲ Creates an efficient seal against smoke and gas.
- ▲ The only sealant free from dangerous emissions.
- ▲ Suitable for most building trade applications.
- ▲ Ready to use, saving time.
- ▲ Excellent filling characteristics.
- ▲ Excellent thermal and acoustic insulation properties.
- ▲ Outperforms conventional silicone, MSP, Butyl and Acrylic based products.

APPLICATIONS

- General gap filling.
- Thermal and acoustic insulation applications.
- Sealing and fixing of windows and doors.
- Sealing penetrations from mechanical, electrical or structural penetrants.

*The JCP assessment document (ETA21/0413) is based on European Assessment Document EAD 350141-00-1106 "Fire Stopping and Fire Sealing Products. Linear Joint and Gap Seals".



INTUMESCENT AND ACOUSTIC MASTIC

A high performance intumescent and acoustic sealant, which in the event of a fire, will swell to provide an inert barrier to smoke and flames.

- Excellent Adhesion To A Wide Range Of Substrates
- Will Not Harden Or Crack With Age
- Dries To A Flexible And Smooth Surfaced Material Which Is Readily Paintable
- Easily Applied

Part Number	Description	Volume ml	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JFIREMAS	Intumescent and Acoustic Mastic	310	1/12	0.34	2.56



POLYURETHANE CLEANER

Polyurethane cleaner for cleaning un-cured foam, which attaches to standard foam applicator guns.

- Ideal For Preserving Applicator Guns By Cleaning Out The Nozzle

Part Number	Description	Volume ml	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JF500C	Polyurethane Cleaner	500ml	1/12	0.50	5.05

APPLICATOR GUNS

A choice of professional and conventional applicator guns for use with gun grade expanding foam.

- Designed To Evenly And Accurately Distribute Foam
- Hand Operated

Part Number	Description	Quantity Unit/ Box	Ship Wt.Kg Each	Price £ Per Each
JFGUNC	Professional Applicator Gun	1	0.70	27.60
JFGUNB	Conventional Applicator Gun	1	0.60	17.46



PROFESSIONAL



CONVENTIONAL



HEAVY DUTY ANCHORS



MEDIUM DUTY ANCHORS



LIGHT DUTY FIXINGS



PA AND GAS



CHEMICAL ANCHORS



SELF-DRILLING SCREWS



NYLON AND CAVITY FIXINGS



DRILL BITS

SPECIALIST FIXINGS BACKED BY TECHNICAL SUPPORT


www.jcpfixings.co.uk



SLEEVE ANCHORS

Thin walled sleeve anchors suitable for use in concrete, stone, brickwork, perforated bricks, and dense concrete blocks.

- ✔ Through Fixing
- ✔ Suitable For Fixing Into Solid Brick, Dense Concrete Blocks, And Non-Cracked Concrete
- ✔ Torque Controlled Expansion

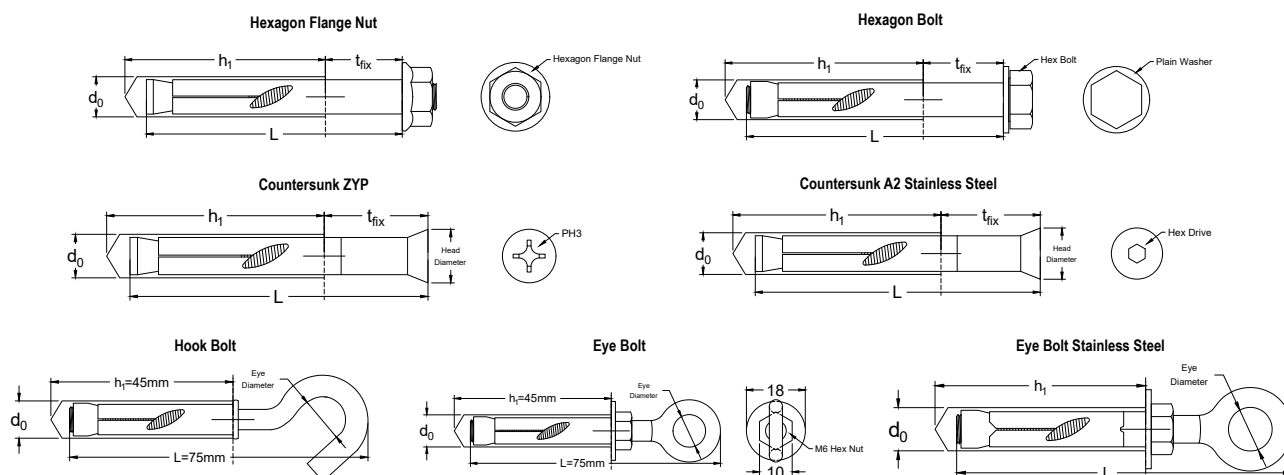

d_0 =Anchor Hole Size L =Length t_{fix} =Minimum Fixture Thickness h_1 =Minimum Hole Depth



HEXAGON FLANGE NUT SLEEVE ANCHORS ZYP

ZINC AND YELLOW PLATED

- ✔ Non-Cracked Concrete
- ✔ Supplied Pre-Assembled For Rapid Installation
- ✔ Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLN08040	8	40	5	35	100	1.60	13.85
SLN08065	8	65	30	40	50	2.42	17.59
SLN08085	8	85	45	40	50	3.14	20.57
SLN10050	10	50	5	45	50	3.26	22.83
SLN10075	10	75	30	45	50	4.64	28.82
SLN10100	10	100	55	45	50	6.04	34.78
SLN10125	10	125	80	45	50	6.40	43.79
SLN12060	12	60	15	50	50	6.52	37.40
SLN12075	12	75	20	60	50	6.84	41.86
SLN12100	12	95	50	60	25	8.90	52.34
SLN12125	12	125	65	60	25	10.95	62.79
SLN16065	16	65	10	60	25	14.60	72.94
SLN16110	16	105	50	65	10	15.80	102.45
SLN16150	16	150	90	65	10	20.10	130.52
SLN20080	20	80	15	70	10	21.60	140.58
SLN20110	20	110	45	70	10	27.60	171.99
SLN20150	20	150	85	70	10	36.80	214.60



HEXAGON BOLT SLEEVE ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete
- Supplied Pre-Assembled For Rapid Installation
- Hex Bolt Gives A Bolt Head Finish
- Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLB08045	8	45	2	45	100	1.85	15.72
SLB08070	8	70	25	45	50	2.54	19.85
SLB08090	8	90	45	45	50	3.22	22.83
SLB10045	10	45	5	45	50	3.26	22.83
SLB10055	10	55	15	45	50	3.56	25.05
SLB10080	10	80	30	50	50	4.84	31.01
SLB10100	10	100	50	50	50	6.00	35.89
SLB12065	12	65	5	65	50	5.92	40.77
SLB12080	12	80	20	65	50	7.20	46.01
SLB12100	12	100	40	65	25	8.80	54.23
SLB12125	12	125	65	65	25	10.80	66.58
SLB16075	16	75	5	65	25	10.75	78.17
SLB16110	16	110	40	65	10	16.10	105.06



COUNTERSUNK HEAD SLEEVE ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete
- Supplied Pre-Assembled For Rapid Installation
- Countersunk Head Gives A Flush Fixture
- Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Head Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLC08060	8	60	30	40	14	100	1.92	42.36
SLC08085	8	85	50	40	14	50	2.79	48.58
SLC10075	10	75	40	45	16	50	3.70	60.49
SLC10100	10	100	60	45	16	50	5.44	72.28

HEXAGON FLANGE NUT SLEEVE ANCHORS A4 STAINLESS STEEL

A4-316 STAINLESS STEEL

- Non-Cracked Concrete
- Supplied Pre-Assembled For Rapid Installation
- Suitable For External Use And Marine Environments



Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLSS06060	6	55	25	35	100	1.26	86.00
SLSS08040	8	40	5	40	100	2.31	102.74
SLSS08065	8	65	30	40	50	2.48	138.40
SLSS10050	10	50	10	45	50	3.28	198.41
SLSS10075	10	75	35	45	50	4.62	252.13
SLSS10100	10	95	55	45	50	5.88	312.98
SLSS12060	12	55	10	50	50	5.81	311.67
SLSS12075	12	65	20	60	50	6.88	354.36
SLSS12100	12	95	50	60	25	9.05	444.79



COUNTERSUNK HEAD SLEEVE ANCHORS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- Non-Cracked Concrete Supplied Pre-Assembled For Rapid Installation
- Countersunk Head Gives Flush Finish Suitable For External Use Hex Drive

Part Number	Anchor Hole Size mm d_0	Anchor Length mm L	Max Fixture Thickness mm t_{fx}	Minimum Hole Depth mm h_1	Head Diameter mm	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLC08045SS	8	45	8	50	12	100	1.62	87.90
SLC08060SS	8	60	18	60	12	50	1.93	100.04
SLC10060SS	10	60	9	60	16	50	3.15	138.38
SLC10080SS	10	80	19	80	16	50	4.20	156.64
SLC12070SS	12	70	10	75	20	50	5.83	239.25
SLC12100SS	12	100	30	100	20	25	7.66	305.04

EYE AND HOOK BOLT SLEEVE ANCHORS ZYP

**ZINC AND
YELLOW PLATED**

- Non-Cracked Concrete/Stone/Brickwork/Dense Concrete Blocks Supplied Pre-Assembled For Rapid Installation
- Forged Eye For Improved Strength Minimum 5µm

Part Number	Anchor Hole Size mm d_0	Eye Diameter mm	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
Hookbolt - SLZH08040	8	11	45	100	2.47	26.90
Forged Eyebolt - SLZE08040F	8	10	45	20	2.12	43.49



Hook Bolt



Eye Bolt

EYE BOLT SLEEVE ANCHORS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- Non-Cracked Concrete/Stone/Brickwork/Dense Concrete Blocks
- Supplied Pre-Assembled For Rapid Installation Forged Eye For Improved Strength Suitable For External Use

Part Number	Anchor Hole Size mm d_0	Length mm L	Eye Diameter mm	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.kg Per 100	Price £ Per 100
SLZE08045SS	8	78	10	50	50	2.60	305.28
SLZE10060SS	10	90	11	65	50	5.00	454.41






SHIELD ANCHORS

The torque-controlled shield anchor is suitable for use in brick and concrete, with the thick walls of the expanders giving the anchor its exceptional grip.

- Torque Controlled Expansion
- Medium To Heavy Duty Loads
- All Steel Anchor

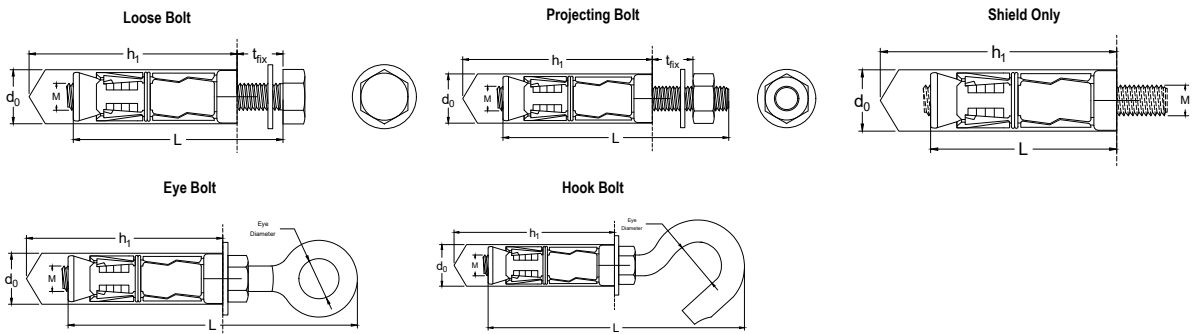

M=Thread Diameter d_0 =Shield Hole Size t_{fix} =Maximum Fixture Thickness L=Length h_1 =Minimum Hole Depth

LOOSE BOLT SHIELD ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Solid Brickwork
- Minimum 5µm



Part Number	Thread Diameter M	Shield Hole Size mm d_0	Max Fixture Thickness mm t_{fix}	Length Under Head mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
ALB0610	6	12	10	55	50	50	2.36	36.41
ALB0625	6	12	25	70	50	50	2.80	37.63
ALB0640	6	12	40	85	50	50	3.20	44.18
ALB0810	8	14	10	60	55	50	5.78	50.49
ALB0825	8	14	25	75	55	50	6.20	53.89
ALB0840	8	14	40	90	55	50	6.46	57.78
ALB1010	10	16	10	70	65	50	9.44	79.63
ALB1025	10	16	25	85	65	50	9.96	84.48
ALB1050	10	16	50	110	65	50	11.14	90.79
ALB1075	10	16	75	135	65	25	12.90	101.96
ALB1210	12	20	10	85	85	25	17.84	132.06
ALB1225	12	20	25	100	85	25	18.40	136.92
ALB1240	12	20	40	115	85	25	19.16	143.23
ALB1260	12	20	60	135	85	25	21.28	154.40
ALB1615	16	25	15	135	125	10	36.30	317.05
ALB1630	16	25	30	150	125	10	36.60	330.16
ALB1660	16	25	60	180	125	10	42.40	356.86



FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS ACROSS THE MAJORITY OF THE UK MAINLAND.



PROJECTING BOLT SHIELD ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete C20/25 To C50/60 Solid Concrete Blocks Solid Brickwork Minimum 5µm

Part Number	Thread Diameter M	Shield Hole Size mm d_0	Max Fixture Thickness mm t_{fx}	Overall Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
APB0610	6	12	10	60	50	50	2.58	37.07
APB0625	6	12	25	75	50	50	2.90	39.45
APB0650	6	12	50	100	50	50	3.34	43.73
APB0815	8	14	15	75	55	50	6.38	54.18
APB0840	8	14	40	100	55	50	7.22	57.04
APB0880	8	14	80	140	55	25	8.56	61.79
APB1010	10	16	10	80	65	50	9.90	78.90
APB1030	10	16	30	100	65	50	10.80	87.93
APB1050	10	16	50	120	65	25	12.00	98.86
APB1070	10	16	70	140	65	25	13.40	106.94
APB1215	12	20	15	100	85	25	19.80	134.04
APB1225	12	20	25	110	85	25	20.40	141.17
APB1250	12	20	50	135	85	10	22.24	155.42
APB1270	12	20	70	155	85	10	23.90	169.68
APB1635	16	25	35	160	125	10	40.40	295.16



SHIELD ONLY SHIELD ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete C20/25 To C50/60 Solid Concrete Blocks Solid Brickwork Minimum 5µm

Part Number	Thread Diameter M	Shield Hole Size mm d_0	Max Fixture Thickness mm t_{fx}	Shield Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
ASHOM06	6	12	-	45	50	50	1.18	25.10
ASHOM08	8	14	-	50	55	50	3.20	32.04
ASHOM10	10	16	-	60	65	50	4.40	44.18
ASHOM12	12	20	-	75	85	25	9.16	71.86
ASHOM16	16	25	-	110	125	10	17.10	150.51



SHIELD ONLY SHIELD ANCHORS A4 STAINLESS STEEL

A4-316 STAINLESS STEEL

- Non-Cracked Concrete C20/25 To C50/60 Solid Concrete Blocks Solid Brickwork Suitable For External Use

Part Number	Thread Diameter M	Shield Hole Size mm d_0	Max Fixture Thickness mm t_{fx}	Shield Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
PSM06SS	6	12	-	45	50	25	1.18	273.58
PSM08SS	8	14	-	50	55	25	3.20	366.35
PSM10SS	10	16	-	60	65	25	4.40	485.30
PSM12SS	12	20	-	75	85	10	9.16	642.30



EYE BOLT SHIELD ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete C20/25 To C50/60 Solid Concrete Blocks Minimum 5µm

Part Number	Thread Diameter M	Shield Hole Size mm d_0	Eye Diameter mm	Overall Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
AEBM06	M6	12	10	80	50	25	7.96	76.49
AEBM08	M8	14	11	95	55	25	8.52	100.70
AEBM10	M10	16	14	115	65	10	15.62	138.20
AEBM12	M12	20	16	130	85	10	27.64	211.80



HOOK BOLT SHIELD ANCHORS ZYP

ZINC AND YELLOW PLATED

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Minimum 5µm


Part Number	Thread Diameter M	Shield Hole Size mm d_0	Eye Diameter mm	Overall Length mm L	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
AHBM06	M6	12	8	80	50	25	7.60	76.49
AHBM08	M8	14	10	95	55	25	8.20	100.70
AHBM10	M10	16	12	115	65	10	14.50	138.20
AHBM12	M12	20	16	145	85	10	26.90	211.80



CONCRETE SCREWS

Countersunk head self-tapping screws, suitable for use in concrete, concrete blocks, and masonry.

- Reaction To Fire Class A1
- Fast And Secure Installation
- Good Performance
- Expansion Free



d_0 =Drill Diameter L=Screw Length t_{fix} =Maximum Fixture Thickness h_1 =Minimum Hole Depth

COUNTERSUNK HEAD CONCRETE SCREWS ZYP

ZINC AND YELLOW PLATED

- Complete With White Cover Cap
- T30 Drive Bit Included
- Locking Ribs Under Head
- Undercutting Action
- Minimum 5µm



Part Number	Drill Diameter mm d_0	Screw Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 1000
CS75040	6	40	-	45	100	1.00	69.15
CS75060	6	60	20	45	100	1.45	95.86
CS75080	6	80	40	45	100	1.72	123.14
CS75100	6	100	60	45	100	2.53	151.96
CS75120	6	120	80	45	100	2.93	182.13
CS75150	6	150	110	45	100	3.16	232.38
CS75180	6	180	140	45	100	3.78	286.78



COUNTERSUNK HEAD CONCRETE SCREWS NO COVER CAPS

ZINC AND YELLOW PLATED

- Locking Ribs Under Head
- Undercutting Action
- Minimum 5µm

Part Number	Drill Diameter mm d_0	Screw Length mm L	Max Fixture Thickness mm t_{fix}	Minimum Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 1000
CS75040A	6	40	-	45	100	1.00	54.69
CS75060A	6	60	20	45	100	1.45	80.72
CS75080A	6	80	40	45	100	1.72	106.82
CS75100A	6	100	60	45	100	2.53	132.85
CS75120A	6	120	80	45	100	2.93	158.88
CS75150A	6	150	110	45	100	3.16	207.93
CS75180A	6	180	140	45	100	3.78	248.89

CONCRETE SCREW COVER CAPS

- Simply Pushes Into The Head Of The Screw
- Available In White Or Brown

Part Number	Colour	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
CSCAPWH	White	100	0.01	1.25
CSCAPBR	Brown	100	0.01	1.25





Technical data sheets can be found on the JCP website for products within the range.

The data sheets provide detailed information on the following; where applicable.

- Product information
- Load and range data
- Performance data
- Installation instructions
- Features
- Base material guidance
- Related products



www.jcpfixings.co.uk

FOR TECHNICAL ADVICE CALL OUR TECHNICAL HELPLINE ON 020 8943 1800



SELF-DRILLING SCREWS BZP


Self-drilling, self-tapping screws for fixing various materials to steel.

- High-Clamping Action
- Gash Points For Fixing Steel To Wood
- Range With EDPM Washers To Provide Waterproof Seal

METALFIX SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

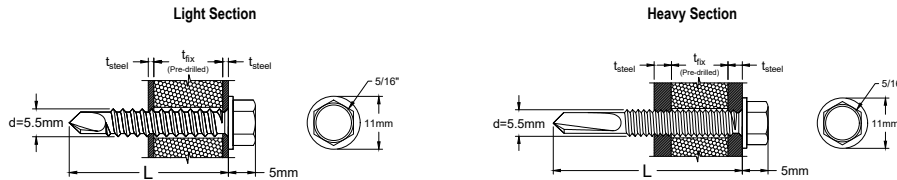

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness




Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55019	5.5	19	3	1.2-3.0	4	-	100	0.38	4.70
MFL55025	5.5	25	3	1.2-3.0	10	-	100	0.56	5.11
MFL55032	5.5	32	3	1.2-3.0	17	-	100	0.65	6.00
MFL55038	5.5	38	3	1.2-3.0	23	-	100	0.74	6.66
MFL55050	5.5	50	3	1.2-3.0	35	-	100	0.90	8.12
HEAVY SECTION									
MFH55022	5.5	22	4	3.0-6.0	5	-	100	0.52	5.79
MFH55032	5.5	32	5	4.0-12.5	5	-	100	0.65	7.82
MFH55040	5.5	40	5	4.0-12.5	13	-	100	0.76	9.35
MFH55050	5.5	50	5	4.0-12.5	23	-	100	0.90	10.55
MFH55060	5.5	60	5	4.0-12.5	33	-	100	1.04	12.41
MFH55070	5.5	70	5	4.0-12.5	43	-	100	1.18	14.05
MFH55080	5.5	80	5	4.0-12.5	53	-	100	1.32	15.90

METALFIX SELF-DRILLING SCREWS WITH 16MM WASHER BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Supplied With 16mm Washer
- EPDM Washer To Prevent Water Ingress
- For General Purpose Applications
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

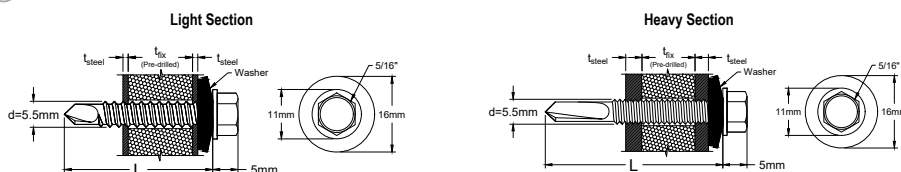


d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55025W16	5.5	25	3	1.2-3.0	7	16	100	0.51	7.57
MFL55032W16	5.5	32	3	1.2-3.0	14	16	100	0.59	8.33
MFL55038W16	5.5	38	3	1.2-3.0	20	16	100	0.67	8.99
MFL55043W16	5.5	43	3	1.2-3.0	25	16	100	0.89	9.90
MFL55050W16	5.5	50	3	1.2-3.0	32	16	100	0.81	10.52
MFL55057W16	5.5	57	3	1.2-3.0	39	16	100	0.81	11.65
MFL55070W16	5.5	70	3	1.2-3.0	52	16	100	1.21	13.17
MFL55075W16	5.5	75	3	1.2-3.0	57	16	100	1.05	13.61
HEAVY SECTION									
MFH55022W16	5.5	22	4	3.0-6.0	2	16	100	0.47	8.30
MFH55032W16	5.5	32	5	4.0-12.5	2	16	100	0.59	10.01
MFH55040W16	5.5	40	5	4.0-12.5	10	16	100	0.69	11.72
MFH55050W16	5.5	50	5	4.0-12.5	20	16	100	0.81	12.92
MFH55060W16	5.5	60	5	4.0-12.5	30	16	100	0.93	14.70
MFH55070W16	5.5	70	5	4.0-12.5	40	16	100	1.07	16.19
MFH55080W16	5.5	80	5	4.0-12.5	50	16	100	1.18	17.98
MFH55100W16	5.5	100	5	4.0-12.5	70	16	100	1.43	22.89
MFH55120W16	5.5	120	5	4.0-12.5	90	16	100	1.68	26.86

METALFIX SELF-DRILLING SCREWS WITH 19MM WASHER BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Supplied With 19mm Washer
- EPDM Washer To Prevent Water Ingress
- For Roofing Applications
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

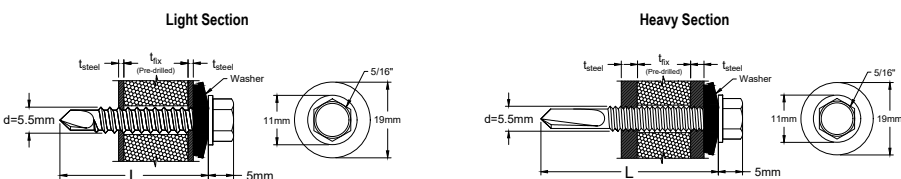

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55025W19	5.5	25	3	1.2-3.0	7	19	100	0.51	8.19
MFL55032W19	5.5	32	3	1.2-3.0	14	19	100	0.59	9.21
MFL55038W19	5.5	38	3	1.2-3.0	20	19	100	0.67	10.34
MFL55050W19	5.5	50	3	1.2-3.0	32	19	100	0.81	12.01
MFL55075W19	5.5	75	3	1.2-3.0	57	19	100	1.05	14.92
HEAVY SECTION									
MFH55022W19	5.5	22	4	3.0-6.0	1.2	19	100	0.47	9.10
MFH55032W19	5.5	32	5	4.0-12.5	2	19	100	0.59	10.92
MFH55040W19	5.5	40	5	4.0-12.5	10	19	100	0.69	12.45
MFH55050W19	5.5	50	5	4.0-12.5	20	19	100	0.81	13.83
MFH55060W19	5.5	60	5	4.0-12.5	30	19	100	0.93	15.90
MFH55070W19	5.5	70	5	4.0-12.5	40	19	100	1.07	16.92
MFH55080W19	5.5	80	5	4.0-12.5	50	19	100	1.18	19.25
MFH55100W19	5.5	100	5	4.0-12.5	70	19	100	1.43	24.16
MFH55120W19	5.5	120	5	4.0-12.5	90	19	100	1.68	29.08



GENERAL PURPOSE METALFIX SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- 1/4" A/F
- Minimum 8µm

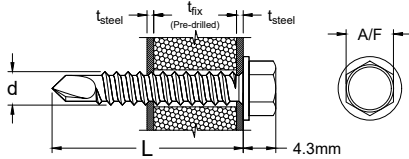

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
GP42013	4.2	13	2	1.2-2.5	5	-	200	0.19	2.39
GP42016	4.2	16	2	1.2-2.5	8	-	200	0.21	2.52
GP42019	4.2	19	2	1.2-2.5	11	-	200	0.22	2.77
GP42025	4.2	25	2	1.2-2.5	17	-	200	0.29	3.17
GP48016	4.8	16	3	1.2-3.0	2	-	100	0.29	3.43
GP48019	4.8	19	3	1.2-3.0	5	-	100	0.30	3.75
GP48025	4.8	25	3	1.2-3.0	11	-	100	0.35	4.18



METALFIX LOOSE WASHERS BZP

BRIGHT ZINC PLATED

- For Use With Self-Drilling Screws
- 1mm Steel With A 2mm Bonded EPDM Backing
- Creates A Watertight Seal



D=Washer Diameter


Part Number	Thread Diameter mm	Washer Diameter mm D	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MFW16	6	16	100	0.15	3.93
MFW19	6	19	100	0.18	5.05



POZI PAN HEAD SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Pan Head Gives A Flush Finish
- DIN 7504N
- C1022 Steel Case Hardened
- Minimum 8µm




d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
PH35095	3.5	9.5	2	1.2-2.5	1	-	200	0.08	1.73
PH35013	3.5	13	2	1.2-2.5	5	-	200	0.10	1.87
PH35019	3.5	19	2	1.2-2.5	11	-	200	0.12	2.16
PH42013	4.2	13	2	1.2-2.5	5	-	200	0.15	2.40
PH42016	4.2	16	3	1.2-2.5	8	-	200	0.17	2.60
PH42019	4.2	19	3	1.2-2.5	11	-	200	0.19	2.82
PH42025	4.2	25	3	1.2-2.5	17	-	200	0.23	3.26
PH48013	4.8	13	3	1.2-3.0	2	-	200	0.21	3.10
PH48019	4.8	19	3	1.2-3.0	5	-	200	0.26	3.62
PH48025	4.8	25	3	1.2-3.0	11	-	200	0.32	4.31

WOODFIX SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Timber To Steel
- Countersunk Head Gives Flush Finish
- DIN 7504P
- Wings Drill A Clearance Hole To Prevent The Timber Jacking
- C1022 Steel Case Hardened
- Minimum 8µm

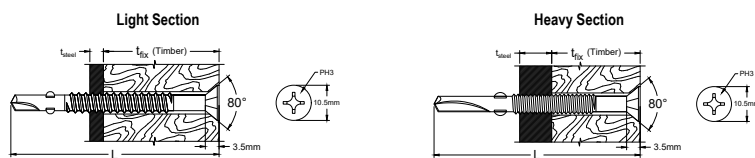

L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness

Part Number	Thread Diameter mm	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
WFL55040	5.5	40	3	1.2-3.0	22	-	100	0.71	7.14
WFL55050	5.5	50	3	1.2-3.0	32	-	100	0.85	8.31
WFL55060	5.5	60	3	1.2-3.0	42	-	100	1.00	9.71
WFL55080	5.5	80	3	1.2-3.0	62	-	100	1.28	13.71
WFL55100	5.5	100	3	1.2-3.0	82	-	100	1.56	17.28
WFL55110	5.5	110	3	1.2-3.0	92	-	100	1.70	21.11
WFL55120	5.5	120	3	1.2-3.0	112	-	100	1.86	24.55
HEAVY SECTION									
WFH55050	5.5	50	5	4.0-12.5	23	-	100	0.85	11.00
WFH55060	5.5	60	5	4.0-12.5	33	-	100	1.00	12.67
WFH55070	5.5	70	5	4.0-12.5	43	-	100	1.14	14.27
WFH55085	5.5	85	5	4.0-12.5	58	-	100	1.35	17.91
WFH55109	5.5	109	5	4.0-12.5	82	-	100	1.69	23.23
WFH55120	5.5	120	5	4.0-12.5	92	-	100	1.86	30.36

WOODFIX DRIVE BIT

BRIGHT ZINC PLATED


- PH3 Drive Bit
- Heat Treated For Longer Life

Part Number	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
WFPH3	10	0.30	31.53

METALFIX GASH POINT SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Timber
- Supplied With 16mm Or 19mm Washer
- EPDM Washer To Prevent Water Ingress
- Gash Point For Quick Penetration
- Hexagon Head
- Sharp Threads Ensure A Low Torque And Strong Fixing
- Minimum 8µm



d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness


Part Number	Thread Diameter mm d	Length mm L	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
GP6303216W	6.3	32	0.7-1.4	1	16	100	0.84	10.44
GP6304516W	6.3	45	0.7-1.4	5	16	100	1.05	12.53
GP6306016W	6.3	60	0.7-1.4	15	16	100	1.25	15.46
GP6308016W	6.3	80	0.7-1.4	35	16	100	1.50	19.16
GP6310016W	6.3	100	0.7-1.4	55	16	100	1.76	22.13
GP6312516W	6.3	125	0.7-1.4	80	16	100	2.02	29.74
GP6302519W	6.3	25	0.7-1.4	1	19	100	0.77	10.32
GP6303219W	6.3	32	0.7-1.4	1	19	100	0.84	11.50
GP6304519W	6.3	45	0.7-1.4	5	19	100	1.05	13.33
GP6306019W	6.3	60	0.7-1.4	15	19	100	1.34	17.02
GP6308019W	6.3	80	0.7-1.4	35	19	100	1.67	21.02
GP6310019W	6.3	100	0.7-1.4	55	19	100	1.99	25.63
GP6312519W	6.3	125	0.7-1.4	80	19	100	2.40	32.87
GP6315019W	6.3	150	0.7-1.4	105	19	100	2.81	41.09



METALFIX STITCHING SCREWS BZP

BRIGHT ZINC PLATED

- For Joining Two Thin Sheets Of Steel
- Supplied With 16mm Or 19mm Washer
- EPDM Washer To Prevent Water Ingress
- Hexagon Head
- DIN 7504K
- Larger Diameter To Give Better Grip In Steel
- Minimum 8µm



d=Thread Diameter L=Length t_{steel} =Steel Thickness D=Washer Diameter

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Washer Diameter mm D	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
SS63022W16	6.3	22	1	2 x 0.9	16	100	0.70	8.25
SS63025W16	6.3	25	1	2 x 1.2	16	100	0.70	8.39
SS63022W19	6.3	22	1	2 x 0.9	19	100	0.80	9.22
SS63025W19	6.3	25	1	2 x 1.2	19	100	0.80	9.36


Maximum Fixture Thickness allows for Maximum Steel Thickness



METALFIX HIGH THREAD SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Composite Panels To Steel
- Supplied With 19mm Washer
- EPDM Washer To Prevent Water Ingress
- Hexagon Head
- Minimum 8µm

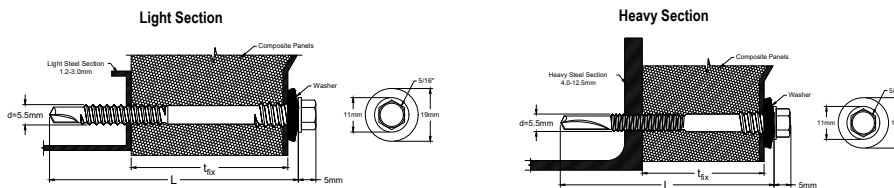

d=Thread Diameter L=Length t_{ins} =Insulation Thickness

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness	Insulation Thickness mm t_{ins}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
HT55065	5.5	65	3	1.2-3.0	30-45	19	100	1.22	18.06
HT55070	5.5	70	3	1.2-3.0	35-50	19	100	1.30	18.60
HT55075	5.5	75	3	1.2-3.0	40-55	19	100	1.34	19.27
HT55085	5.5	85	3	1.2-3.0	40-60	19	100	1.46	22.13
HT55100	5.5	100	3	1.2-3.0	45-75	19	100	1.96	24.10
HT55125	5.5	125	3	1.2-3.0	75-100	19	100	2.46	32.42
HT55150	5.5	150	3	1.2-3.0	90-120	19	100	2.90	36.49
HEAVY SECTION									
HTH55075	5.5	75	5	4.0-12.5	30-45	19	100	1.43	21.75
HTH55105	5.5	105	5	4.0-12.5	50-64	19	100	1.82	29.52
HTH55130	5.5	130	5	4.0-12.5	60-95	19	100	2.18	36.07

LIGHT SECTION


HEAVY SECTION



LOW PROFILE METALFIX SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Pan Head Gives A Flush Finish
- Large Head For Increased Clamping
- Coarse Thread For Improved Grip And Pull Out
- Minimum 8µm



LIGHT SECTION

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness



HEAVY SECTION


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
LLP48016	4.8	16	3	1.2-2.5	8	10	200	0.27	8.56
LLP48025	4.8	25	3	1.2-2.5	17	10	200	0.32	9.57
LLP48030	4.8	30	3	1.2-2.5	22	10	200	0.35	10.08
LLP48040	4.8	40	3	1.2-2.5	32	10	100	0.38	11.46
HEAVY SECTION									
HLP55020	5.5	20	3	1.2-3.5	5	10	200	0.35	9.44
HLP55040	5.5	40	3	1.2-3.5	25	10	100	0.67	12.76



WAFER HEAD SELF-DRILLING SCREWS BZP

BRIGHT ZINC PLATED

- For Fixing Steel To Steel
- Low Profile Wafer Head For Larger Bearing Surface
- Sharp Point Designed To Penetrate Effectively
- Fine Thread Ensures Strong Connection



d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
WH4213	4.2	13	2	1.2-2.5	7	11	200	0.25	2.52



METALFIX MAGNETIC SOCKETS


- Magnetic To Hold Screw in Place
- 5/16" AF

Part Number	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MF516	1	3.00	221.00

FIBRE CEMENT SCREWS BZP

BRIGHT ZINC PLATED

- ✔ For Fixing Fibre Cement Profiles To Steel
- ✔ Supplied With Washer For Watertight Fixing
- ✔ Reamer On Shank Makes A Clearance To Allow Sheet Expansion And Contraction
- ✔ Minimum 8µm



d=Thread Diameter L=Length t_{fix} =Maximum Fixture Thickness

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
FCL63110	6.3	110	3	1.2-3.0	75	22/25	50	2.23	45.06
FCL63125	6.3	125	3	1.2-3.0	95	22/25	50	2.78	49.76
FCL63155	6.3	155	3	1.2-3.0	125	22/25	50	3.27	64.29
FCL63175	6.3	175	3	1.2-3.0	145	22/25	50	3.58	73.01
FCL63195	6.3	195	3	1.2-3.0	165	22/25	50	3.92	84.31
FCL63230	6.3	230	3	1.2-3.0	200	22/25	50	4.59	118.39
HEAVY SECTION									
FCH63110	6.3	110	5	4.0-12.5	75	22/25	50	2.48	47.96
FCH63130	6.3	130	5	4.0-12.5	95	22/25	50	2.81	51.16
FCH63150	6.3	150	5	4.0-12.5	120	22/25	50	3.13	62.89
FCH63180	6.3	180	5	4.0-12.5	145	22/25	50	3.62	80.00
FCH63200	6.3	200	5	4.0-12.5	165	22/25	50	3.94	100.52
FCH63235	6.3	235	5	4.0-12.5	200	22/25	50	4.70	132.74

SELF-DRILLING SCREWS STAINLESS STEEL


Self-drilling, self-tapping screws for fixing various materials to steel.

- ✔ High-Clamping Action
- ✔ Gash Points For Fixing Steel To Wood
- ✔ Range With EDPM Washers To Provide Waterproof Seal
- ✔ Stainless Steel Provides Excellent Corrosion Resistance

METALFIX BI-METAL A2 STAINLESS STEEL

A2-304 STAINLESS STEEL

- ✔ For Fixing Steel To Steel
- ✔ Hexagon Head

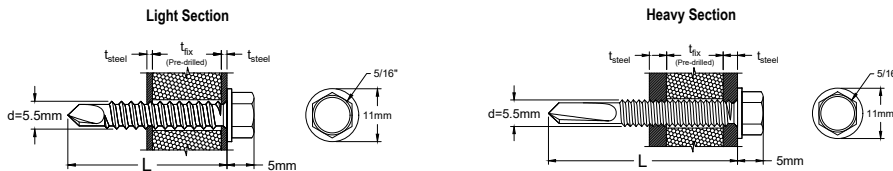

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55022SS	5.5	22	3	1.3-3.0	2	-	100	0.54	34.05
MFL55025SS	5.5	25	3	1.3-3.0	7	-	100	0.56	34.22
MFL55032SS	5.5	32	3	1.3-3.0	14	-	100	0.65	37.95
MFL55038SS	5.5	38	3	1.3-3.0	20	-	100	0.74	41.03
MFL55050SS	5.5	50	3	1.3-3.0	32	-	100	0.90	46.23
HEAVY SECTION									
MFH55038SS	5.5	38	5	4.0-12.5	8	-	100	0.76	52.11
MFH55050SS	5.5	50	5	4.0-12.5	20	-	100	0.90	58.19



METALFIX LOOSE WASHERS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- ✓ For Use With Self-Drilling Screws
- ✓ 1mm A2 Stainless Steel With A 2mm Bonded EPDM Backing
- ✓ Creates A Watertight Seal



D=Washer Diameter


Part Number	Hole Diameter mm	Washer Diameter mm D	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MFW16SS	6	16	100	0.15	6.03
MFW19SS	6	19	100	0.18	7.17



METALFIX WITH WASHER BI-METAL A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- ✓ For Fixing Steel To Steel
- ✓ Supplied With 16mm Washer
- ✓ EPDM Washer To Prevent Water Ingress
- ✓ For General Purpose Applications
- ✓ Hexagon Head

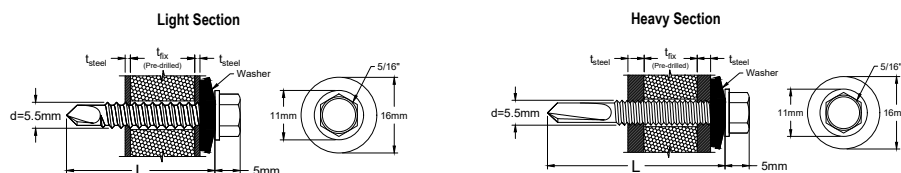

LIGHT SECTION

d=Thread Diameter L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness



HEAVY SECTION


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Washer Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55022SSW16	5.5	22	3	1.2-3.0	2	16	100	0.49	40.54
MFL55025SSW16	5.5	25	3	1.2-3.0	7	16	100	0.51	40.55
MFL55032SSW16	5.5	32	3	1.2-3.0	14	16	100	0.59	44.23
MFL55038SSW16	5.5	38	3	1.2-3.0	20	16	100	0.67	48.06
MFL55050SSW16	5.5	50	3	1.2-3.0	32	16	100	0.81	53.25
HEAVY SECTION									
MFH55038SSW16	5.5	38	5	4.0-12.5	8	16	100	0.69	58.20
MFH55050SSW16	5.5	50	5	4.0-12.5	20	16	100	0.81	66.86



WOODFIX SELF-DRILLING SCREWS BI-METAL A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- ✓ For Fixing Timber To Steel
- ✓ Countersunk Head For Flush Finish
- ✓ Wings Drill A Clearance Hole To Prevent The Timber Jacking



L=Length t_{steel} =Steel Thickness t_{fix} =Maximum Fixture Thickness


Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm t_{fix}	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
WFL55040SS	5.5	40	3	1.2-3.0	22	100	0.71	49.22
WFL55050SS	5.5	50	3	1.2-3.0	32	100	0.85	52.53
WFL55060SS	5.5	60	3	1.2-3.0	42	100	1.00	57.30
WFL55080SS	5.5	80	3	1.2-3.0	62	100	1.28	65.47



METALFIX STITCHING SCREWS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- For Joining Two Thin Sheets of Steel
- Supplied With 16mm Washer
- EPDM Washer To Prevent Water Ingress
- Hexagon Head
- Larger Diameter To Give Better Grip In Steel



d=Thread Diameter L=Length t_{steel} =Steel Thickness D=Washer Diameter

Part Number	Thread Diameter mm d	Length mm L	Point Type	Steel Thickness t_{steel}	Max Fixture Thickness mm	Washer Diameter mm D	Quantity Per Box	Ship Wt. Kg Per 100	Price £ Per 100
SS63025SSW16	6.3	25	1	2 x 0.9	16	16	100	0.70	46.60
SS63035SSW16	6.3	35	1	2 x 1.2	16	16	100	0.70	53.45



COVER CAPS

A range of coloured cover caps to suit hexagon head self-drilling screws.

- Colour Coded To British Standard
- Push Fit Over 16mm And 19mm Washers
- Provide An Additional Weather Seal

COLOURED COVER CAPS

Part Number 16mm Washer	Part Number 19mm Washer	Colour	Quantity Per Bag	Ship Wt. Kg Per 100	Price £ Per 100
MFC16AN	MFC19AN	Anthracite (18A14)	1000	0.82	4.50
MFC16BL	MFC19BL	Black (00E53)	1000	0.82	4.50
MFC16GG	MFC19GG	Goosewing Light Grey (10A05)	1000	0.82	4.50
MFC16JG	MFC19JG	Juniper Green (12B29)	1000	0.82	4.50
MFC16MG	MFC19MG	Merlin Dark Grey (18B25)	1000	0.82	4.50
MFC16MO	MFC19MO	Moorland Green (12B21)	1000	0.82	4.50
MFC16MU	MFC19MU	Mushroom (10B19)	1000	0.82	4.50
MFC16OB	MFC19OB	Ocean Blue (18C39)	1000	0.82	4.50
MFC16OG	MFC19OG	Olive Green (12B27)	1000	0.82	4.50
MFC16PR	MFC19PR	Poppy Red (04E53)	1000	0.82	4.50
MFC16SB	MFC19SB	Slate Blue (18B29)	1000	0.82	4.50
MFC16SG	MFC19SG	Slate Grey (18B27)	1000	0.82	4.50
MFC16VB	MFC19VB	Vandyke Brown (08B29)	1000	0.82	4.50
MFC16WH	MFC19WH	White (00E55)	1000	0.82	4.50





INTERNAL THREADED SELF-DRILLING SCREWS


Internally threaded sockets for hanging vertically threaded rods, and internal threaded screws for fixing horizontally into perlin and steel.

- One Piece Internally Threaded Fastening System
- All Steel



METALFIX VERTICAL HANGERS

- For Hanging Threaded Rods From Purlins, Light Steel Or Heavy Steel
- Fast Overhead Installation With A Screwgun
- Supplied Complete With Back-Nut For Added Security (Light Section Only)

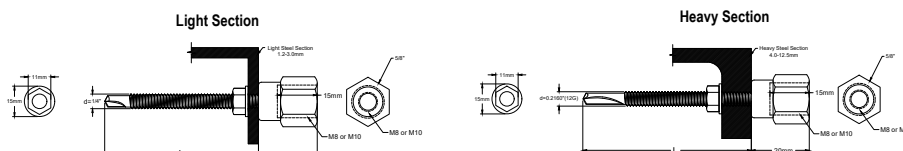

LIGHT SECTION

d=Thread Diameter L=Length




HEAVY SECTION

Part Number	Thread Diameter "d"	Length mm L	Point Type	Steel Thickness	Internal Thread Diameter M	Across Flats "A/F"	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55M0825V	1/4	25	3	1.2-3.0	8	5/8	100	3.55	73.29
MFL55M0838V	1/4	38	3	1.2-3.0	8	5/8	100	3.40	75.37
MFL55M1025V	1/4	25	3	1.2-3.0	10	5/8	100	3.70	71.46
MFL55M1038V	1/4	38	3	1.2-3.0	10	5/8	100	3.54	73.36
HEAVY SECTION									
MFH55M1032V	12g	38	5	4.0-12.5	10	5/8	100	3.60	76.27



METALFIX HORIZONTAL HANGERS

- For Hanging Threaded Rods From Purlins, Light Steel Or Heavy Steel
- Fast Overhead Installation With A Screwgun
- Supplied Complete With Back-Nut For Added Security (Light Section Only)

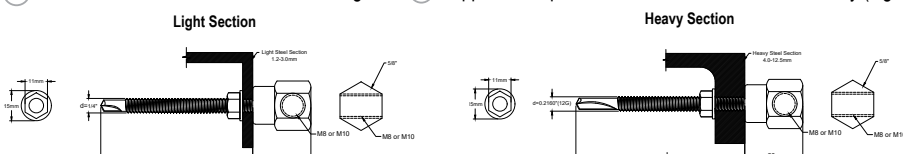

LIGHT SECTION

d=Thread Diameter L=Length




HEAVY SECTION

Part Number	Thread Diameter "d"	Length mm L	Point Type	Steel Thickness	Internal Thread Diameter mm	Across Flats "A/F"	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SECTION									
MFL55M0825H	1/4	25	3	1.2-3.0	8	5/8	100	3.45	94.49
MFL55M1025H	1/4	25	3	1.2-3.0	10	5/8	100	3.30	93.53
MFL55M1038H	1/4	38	3	1.2-3.0	10	5/8	100	3.40	96.40
HEAVY SECTION									
MFH55M1032H	12g	38	5	4.0-12.5	10	5/8	100	3.10	94.71



GASH POINT VERTICAL HANGERS

- For Fixing Into Timber For Suspending Threaded Rod
- Fast Overhead Installation With A Screwgun
- Gash Point For Self-Drilling




d=Thread Diameter L=Length t_{steel} =Steel Thickness

Part Number	Thread Diameter "d"	Length mm L	Point Type	Steel Thickness t_{steel}	Internal Thread Diameter M	Across Flats "A/F"	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
GP63M0825V	1/4	25	-	0.7-1.4	8	5/8	100	3.26	70.35
GP63M0850V	1/4	50	-	0.7-1.4	8	5/8	100	3.00	72.97
GP63M1025V	1/4	25	-	0.7-1.4	10	5/8	100	3.50	67.01
GP63M1050V	1/4	50	-	0.7-1.4	10	5/8	100	3.30	69.71
GP79M1063V	1/3	63	-	0.7-1.4	10	5/8	100	3.88	79.79



GASH POINT HORIZONTAL HANGERS

- For Fixing Into Timber For Suspending Threaded Rod
- Fast Overhead Installation With A Screwgun
- Gash Point For Self-Drilling



d=Thread Diameter L=Length t_{steel} =Steel Thickness

Part Number	Thread Diameter "d"	Length mm L	Point Type	Steel Thickness t_{steel}	Internal Thread Diameter M	Across Flats "A/F"	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
GP63M0825H	1/4	25	-	0.7-1.4	8	5/8	100	3.31	89.11
GP63M1025H	1/4	25	-	0.7-1.4	10	5/8	100	2.90	88.04
GP63M1050H	1/4	50	-	0.7-1.4	10	5/8	100	3.40	93.13



SETTING TOOL FOR ROD HANGERS

- Install And Remove Internally Threaded Self-Drilling Rod Hangers
- 5/8" AF


Part Number	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
MF508RH	5	2.10	5.96



NAIL IN ANCHORS

A steel hammer-in fixing suitable for most solid base materials including re-inforced concrete, concrete blocks, brickwork and natural stone. Nail in anchors are non-removable and therefore vandal-proof.

- ✔ No Setting Tool Required
- ✔ Internally Tapered Body Gives Exceptional Grip
- ✔ Through Fixing
- ✔ Non-Cracked Concrete
- ✔ Hammer-In Expansion

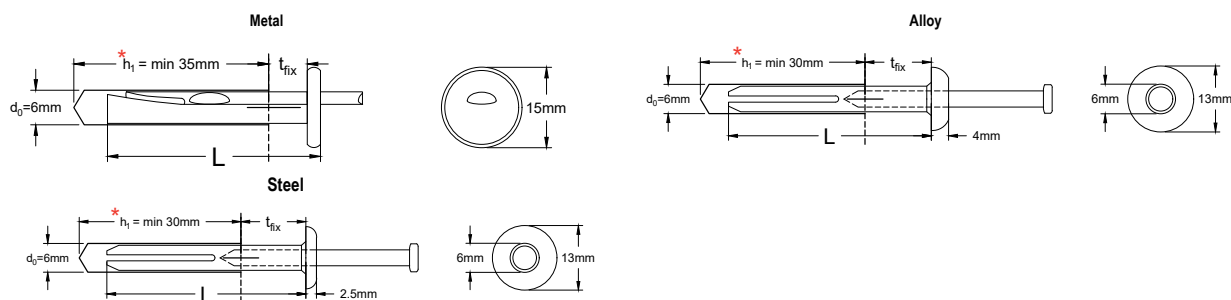

d_0 =Anchor Hole Size L =Anchor Length t_{fix} =Maximum Fixture Thickness $h1^*$ =Minimum Hole Depth

* See JCP Technical Data Sheet on www.jcpfixings.co.uk for details

NAIL IN ANCHORS METAL

METAL

- ✔ Suitable For Most Solid Base Materials
- ✔ Flush Finish
- ✔ Large Head Diameter Offers High Pull Over Strength For Thin Straps Or Brackets

Part Number	Anchor Hole Size mm d_0	Total Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Flange Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MDA06040	6	40	5	15	100	1.40	12.12
MDA06065	6	65	30	15	100	1.60	20.82

NAIL IN ANCHORS ALLOY

ALLOY

- ✔ Suitable For Most Solid Base Materials
- ✔ Dome Flange Head

Part Number	Anchor Hole Size mm d_0	Total Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Flange Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LANI06030	6	30	10	13	100	0.85	16.21
LANI06040	6	40	20	13	100	1.10	20.51
LANI06050	6	50	30	13	100	1.24	23.83

NAIL IN ANCHORS STEEL

STEEL

- ✔ Suitable For Most Solid Base Materials
- ✔ Increased Fire Resistance
- ✔ Dome Flange Head


Part Number	Anchor Hole Size mm d_0	Total Anchor Length mm L	Max Fixture Thickness mm t_{fix}	Flange Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MNI06030	6	30	10	13	100	0.85	33.12
MNI06040	6	40	20	13	100	1.10	34.39
MNI06050	6	50	30	13	100	1.24	37.99



CONSTRUCTION NAILS

Stainless steel and steel nails for building construction.

- Masonry Nails For Use In Concrete And Block
- Plastic Headed Nails For Use In Windows, Soffits And Fascias

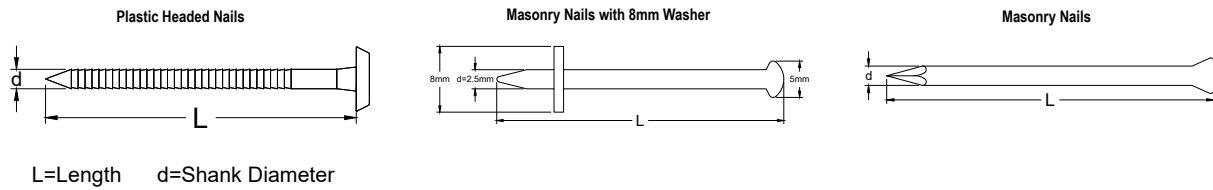

PLASTIC HEADED NAILS

**A4-316
STAINLESS STEEL**

- Available With Black Or White Heads To Match Soffit
- HDPE Impact Resistant Poly Head
- Ring Shanked
- UV Factor 5 Stabilised
- Maintenance Free
- Suitable For External Use And Marine Environments

Part Number	Shank Length mm L	Shank Diameter mm d	Head Colour	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
POLY030WH	30	2.00	White	250	0.22	7.75
POLY040WH	40	2.00	White	250	0.29	8.79
POLY050WH	50	2.65	White	100	0.25	16.17
POLY065WH	65	3.35	White	100	0.48	23.79
POLY030BL	30	2.00	Black	250	0.22	7.21
POLY040BL	40	2.00	Black	250	0.29	8.38
POLY050BL	50	2.65	Black	100	0.25	15.08
POLY065BL	65	3.35	Black	100	0.48	22.92

MASONRY NAILS WITH WASHER

STEEL

- Manufactured From Austempered High Carbon Steel
- Hardened And Tempered
- Complete With Washer For Greater Pull Over
- Oil Bathed
- 8mm Diameter Washer

Part Number	Length mm L	Shank Diameter mm d	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
AMNL025MP	25	2.5	200	0.13	7.50
AMNL030MP	30	2.5	200	0.15	8.00






MASONRY NAILS

STEEL

- Hardened and Tempered
- Manufactured from Austempered High Carbon Steel
- Versatile Nail Set by Hammer
- Oil Bathed


Part Number	Length mm L	Shank Diameter mm d	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LIGHT SHANK - COUNTERSUNK HEAD					
AMNL025	25	2.5	100	0.11	2.17
AMNL030	30	2.5	100	0.13	2.46
AMNL040	40	2.5	100	0.18	3.17
AMNL050	50	2.5	100	0.20	3.63
AMNL060	60	2.5	100	0.24	4.08
MEDIUM SHANK - COUNTERSUNK HEAD					
AMNM025	25	3.0	100	0.15	2.96
AMNM030	30	3.0	100	0.17	3.29
AMNM040	40	3.0	100	0.25	3.96
AMNM050	50	3.0	100	0.29	5.04
AMNM060	60	3.0	100	0.37	5.54
HEAVY SHANK - ROUND HEAD					
AMNH050	50	3.5	100	0.40	6.38
AMNH060	60	3.5	100	0.51	7.08
AMNH075	75	3.5	100	0.58	8.71
AMNH090	90	3.5	100	0.65	10.54
AMNH100	100	3.5	100	0.81	11.08

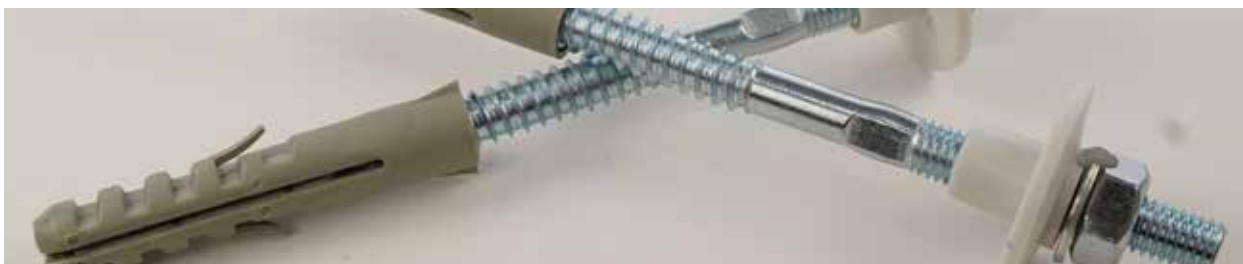

SANITARY FIXINGS

Complete fixing sets for wash basins, urinals, and sanitary installations.

- Complete With Cover Caps

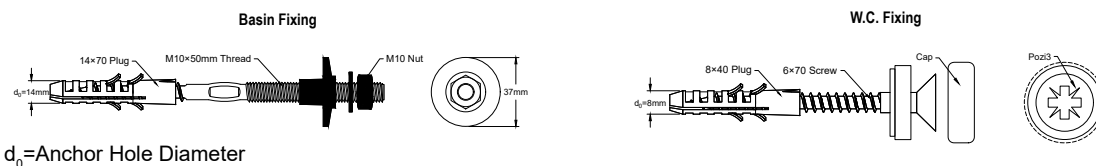

BASIN FIXINGS

STEEL



Part Number	Screw Size mm	Plug Size mm	Anchor Hole Diameter mm d_0	Individual Quantity Per Box	Ship Wt.Kg Per 100	Individual £ Price Per 100	Price £ Per Bag of 2
NBFS10140	M10 x 140	14 x 70	14	10	19	83.33	1.67



W.C FIXINGS

STEEL

Part Number	Screw Size mm	Plug Size mm	Colour	Anchor Hole Diameter mm d ₀	Individual Quantity Per Box	Ship Wt.Kg Per 100	Individual £ Price Per 100	Price £ Per Bag of 2
NWCW06070	6.0 x 70	8 x 40	White	8	50	3.4	55.17	1.10
NWCC06070	6.0 x 70	8 x 40	Chrome	8	50	3.4	55.17	1.10




BRACKETS


Vertical flange clips ideal for fixing suspended wire hangers to steel profiles.
Angle brackets for suspending lightweight ceilings and services.

- ✔ Flexible Positioning
- ✔ High Strength
- ✔ Simple Installation

Vertical Flange Clips



Angle Brackets



VERTICAL FLANGE CLIPS

- ✔ Fixes To A Range Of Steel Profiles
- ✔ Projecting Lugs For Secure Attachment
- ✔ Spring Steel Clip
- ✔ No Screws Required
- ✔ High Strength Steel



ZINC AND YELLOW PLATED

Part Number	Size mm	Min Purlin Gauge mm	Max Purlin Gauge mm	Height mm	Width mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
VFC1	20 x 42	1.6	2.5	42	20	100	0.82	10.15

ANGLE BRACKETS

- ✔ Can Be Attached To Any Base Material
- ✔ Small And Lightweight
- ✔ Mild Steel

BRIGHT ZINC PLATED

Part Number	Size mm	Width mm	Hole Diameter mm	Thickness mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
AB2020	20 x 20	17	4.7	1.2	100	0.51	4.40






WALL SCREWS


A light duty carbon steel fixing for use in concrete and masonry base materials, with fast and easy installation and no pre-drilling required.

- ✔ Undercutting Action With No Spinning Or Stripping
- ✔ Non-Cracked Concrete
- ✔ Reaction To Fire Class A1
- ✔ Masonry Base Materials
- ✔ Expansion Free
- ✔ Minimum 5µm

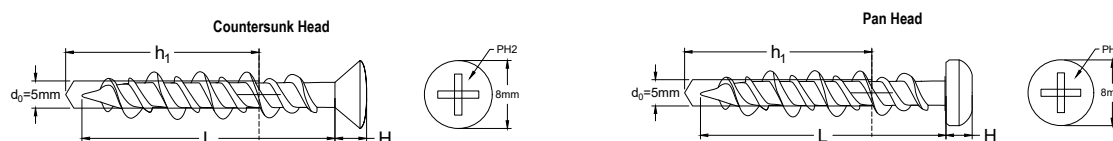

d_0 =Hole Diameter h_1 *=Minimum Hole Depth L=Shank Length H=Head Thickness

* See JCP Technical Data Sheet on www.jcpfixings.co.uk for details



COUNTERSUNK HEAD WALL SCREWS

STEEL

- ✔ Head Colour To Match Application
- ✔ Fast And Secure Installation

Part Number	Hole Diameter mm d_0	Thread Diameter mm	Shank Length mm L	Head Thickness mm H	Head Colour	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
WS5032CSZ	5	6	32	4	Bright Zinc Plated	100	0.38	8.79
WS5038CSZ	5	6	38	4	Bright Zinc Plated	100	0.44	9.25
WS5050CSZ	5	6	50	4	Bright Zinc Plated	100	0.56	10.03
WS5032CSW	5	6	32	4	White	100	0.38	9.67
WS5038CSW	5	6	38	4	White	100	0.44	10.06
WS5050CSW	5	6	50	4	White	100	0.56	10.84



PAN HEAD WALL SCREWS

STEEL

- ✔ Head Colour To Match Application
- ✔ Fast And Secure Installation


Part Number	Hole Diameter mm d_0	Thread Diameter mm	Shank Length mm L	Head Thickness mm H	Head Colour	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
WS5032PHZ	5	6	32	3	Bright Zinc Plated	100	0.38	8.79
WS5038PHZ	5	6	38	3	Bright Zinc Plated	100	0.44	9.25
WS5050PHZ	5	6	50	3	Bright Zinc Plated	100	0.56	10.03
WS5032PHW	5	6	32	3	White	100	0.38	9.67
WS5038PHW	5	6	38	3	White	100	0.44	10.06
WS5050PHW	5	6	50	3	White	100	0.56	10.84



BIGTWIST NAILS

A twist nail for fixing composite panels to wooden battens. The nail rotates during installation to reduce the risk of splitting timber.

- ✔ No Drilling Required
- ✔ Large 20mm Head
- ✔ Quick Installation
- ✔ Minimum 5µm



L=Anchor Length $t_{fix\ max}$ =Maximum Fixture Thickness



BIGTWIST NAILS

BRIGHT ZINC PLATED

- ✔ Unique One Piece Stress Free Fixing
- ✔ No Need For Screws
- ✔ Grade 8.8 High Tensile Steel
- ✔ Rotates During Installation To Reduce The Risk Of Splitting Timber


Part Number	Shank Diameter mm	Anchor Length mm L	Rec.Tensile Load kN	Max Fixture Thickness mm $t_{fix\ max}$	Quantity Per Bag/Box	Ship Wt.Kg Per 100	Price £ Per 100
TC08090BG	8	90	0.22	55	25 bag	1.40	49.86
TC08135BG	8	135	0.22	100	25 bag	2.14	57.04
TC08165BG	8	165	0.22	130	25 bag	2.30	65.42
TC08195BG	8	195	0.22	160	25 bag	2.80	76.39
TC08220BG	8	220	0.22	185	25 bag	3.00	85.37
TC08090BX	8	90	0.22	55	500 box	1.40	48.56
TC08135BX	8	135	0.22	100	500 box	2.14	56.30
TC08165BX	8	165	0.22	130	500 box	2.30	62.59
TC08195BX	8	195	0.22	160	300 box	2.80	73.52
TC08220BX	8	220	0.22	185	300 box	3.00	83.80



FIXING BANDS


For general strapping applications available in both straight and round formats, supplied in rigid plastic dispensers for ease of use.

- ✓ Easy To Cut
- ✓ Easy To Dispense
- ✓ Various Hole Configurations
- ✓ Stainless Steel For External Use

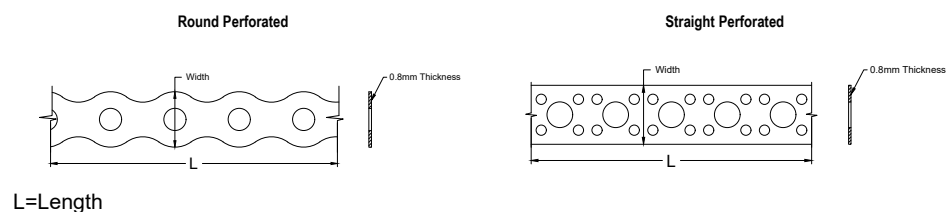

FIXING BANDS

1 ROUND PERFORATED						
Part Number	Length Metres L	Width mm	Thickness mm	Quantity	Ship Wt.Kg	Price £ Per Each
FBR0312G	3	12	0.8	1	0.16	2.23
FBR1012G	10	12	0.8	1	0.48	5.12
FBR1017G	10	17	0.8	1	0.72	6.69
2 STRAIGHT PERFORATED						
Part Number	Length Metres	Width mm	Thickness mm	Quantity	Ship Wt.Kg	Price £ Per Each
FBS0312G	3	12	0.8	1	0.16	2.52
FBS1012G	10	12	0.8	1	0.48	5.70
FBS1019G	10	19	0.8	1	1.10	7.96
3 ROUND PERFORATED						
Part Number	Length Metres L	Width mm	Thickness mm	Quantity	Ship Wt.Kg	Price £ Per Each
FBR1017SS	10	17	0.8	1	0.72	19.22

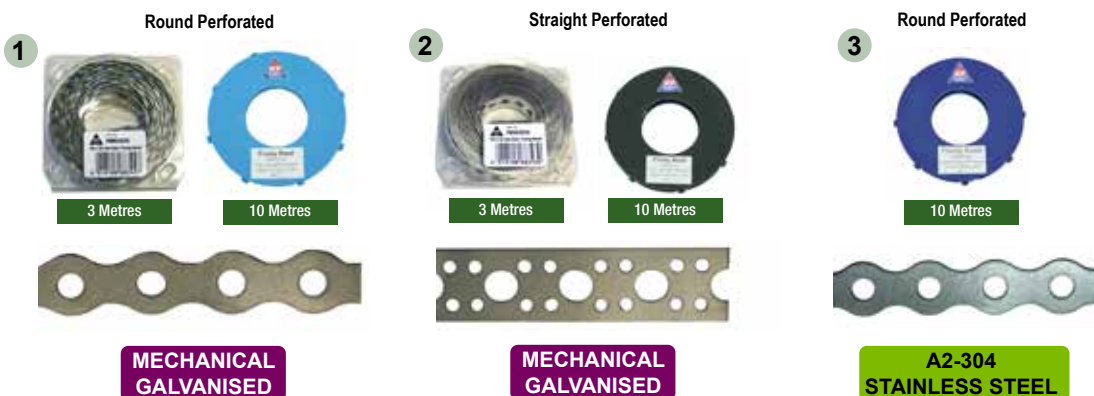




NYLON HAMMER SCREWS

A range of hammer in nylon screws, suitable for concrete and masonry.

- ✔ For Use In Timber Battens, Frame Ties, Electrical Boxes And Conduit Clips
- ✔ Ribbed Plug Manufactured From Polyamide PA6 Nylon
- ✔ Through Fixing

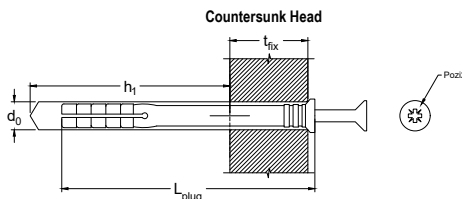

d_0 = Anchor Hole Size L_{plug} = Anchor Plug Length t_{fix} = Maximum Fixture Thickness h_1 = Minimum Hole Depth



COUNTERSUNK HEAD NYLON HAMMER SCREWS ZYP

ZINC AND YELLOW PLATED

- ✔ For Use In Concrete And Masonry
- ✔ Ideal For Fast Fixing Repetitive Applications
- ✔ Countersunk Head Gives A Flush Finish

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NHS05030	5	30	5	30	100	0.35	3.92
NHS05050	5	50	25	30	100	0.40	5.46
NHS06040	6	40	10	35	100	0.47	4.64
NHS06050	6	50	20	35	100	0.55	6.02
NHS06060	6	60	30	35	100	0.63	6.45
NHS06070	6	70	40	35	100	0.83	7.04
NHS08060	8	60	20	45	100	1.01	10.15
NHS08080	8	80	40	45	100	1.26	13.42
NHS08100	8	100	60	45	50	1.56	15.75
NHS08120	8	120	80	45	50	1.89	18.82
NHS08140	8	140	100	45	50	2.22	20.68



FLANGE HEAD NYLON HAMMER SCREWS ZYP

ZINC AND YELLOW PLATED

- ✔ For Use In Concrete And Masonry
- ✔ Large Diameter Flange Head
- ✔ Flat Head Finish

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NHS06040FH	6	40	10	35	13	100	0.47	4.53



COUNTERSUNK HEAD NYLON HAMMER SCREWS A2 STAINLESS STEEL

**A2-304
STAINLESS STEEL**

- ✔ For Use In Concrete And Masonry
- ✔ Ideal For Fast Fixing Repetitive Applications
- ✔ Countersunk Head Gives A Flush Finish
- ✔ Suitable For External Use

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NHS05030SS	5	30	5	30	200	0.35	11.15
NHS06040SS	6	40	10	35	200	0.47	11.89
NHS06060SS	6	60	30	35	100	0.63	17.42
NHS06070SS	6	70	40	35	100	0.74	20.06
NHS08060SS	8	60	20	45	100	1.01	28.53
NHS08080SS	8	80	40	45	100	1.26	25.28
NHS08100SS	8	100	60	45	50	1.56	25.86



MUSHROOM HEAD NYLON HAMMER SCREWS

- ✔ For Use In Concrete And Masonry
- ✔ Suitable For External Use
- ✔ Mushroom Head Gives A Low Profile Finish

Part Number	Anchor Hole Size mm	Anchor Length mm	Max Fixture Thickness mm	Min Hole Depth mm	Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NNP06040	6	40	7	50	13	100	0.35	11.19



TRAINING

Our technical team offer training sessions to provide a hands-on-experience with our fixings. Sessions are tailored to meet the needs of the audience and can also be delivered virtually.



- ✔ **BASIC**
For those who know very little about fixings and covers an introduction to fixings, fixings and construction regulations and practical fixing practices.
- ✔ **ADVANCE - FOR PEOPLE WITHOUT AN ENGINEERING BACKGROUND**
For those with adequate industrial knowledge about fixings who wish to learn more. This covers an introduction to modern fixings, introduces JCP's anchor calculation program, looks at construction fixing regulations and detailed practical fixing practices.
- ✔ **ADVANCE - FOR ENGINEERS**
For those with an engineering knowledge about fixings. This advanced session covers an introduction to connection design, Eurocodes and regulations for fixings, introduces JCP's anchor calculation program, result interpretation and passive fire resistance fixing design.


FOR MORE INFORMATION CALL OUR TECHNICAL HELPLINE ON 020 8943 1800



NYLON FRAME FIXINGS

The nylon frame fixing includes a matched screw and extended plug for anchoring timber to a wide variety of materials.

- ✔ For Fixing Timber Frames, Battens, Windows And Other Wooden Products to Concrete and Masonry
- ✔ High-Expansion Ratio
- ✔ Ribbed Plug Manufactured From Polyamide PA6 Nylon
- ✔ Through Fixing

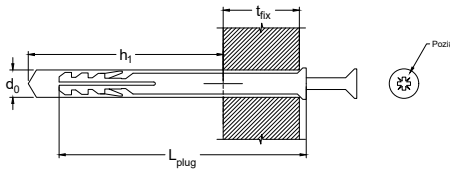

d_0 = Anchor Hole Size L_{plug} = Anchor Plug Length t_{fix} = Maximum Fixture Thickness h_1 = Minimum Hole Depth

COUNTERSUNK NYLON FRAME FIXINGS ZYP

ZINC AND YELLOW PLATED

- ✔ For Use In Solid Base Materials
- ✔ Countersunk Head Gives A Flush Finish
- ✔ Strong Grip In Weaker Materials



Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NFF08060	8	60	20	45	100	1.24	12.28
NFF08080	8	80	40	45	100	1.56	15.89
NFF08100	8	100	60	45	100	1.70	19.01
NFF08120	8	120	80	45	100	1.89	23.14
NFF10080	10	80	35	50	100	2.40	27.28
NFF10100	10	100	55	50	100	3.44	32.23
NFF10120	10	120	75	50	100	3.80	38.90
NFF10140	10	140	95	50	100	4.36	41.82
NFF10160	10	160	115	50	100	5.16	48.03

ETA COUNTERSUNK HEAD NYLON FRAME FIXINGS BZP



- ✔ For Use In Solid And Hollow Base Materials
- ✔ Countersunk Head Gives A Flush Finish
- ✔ Fire Resistance Loading
- ✔ TX Drive: 8mm - T30, 10mm - T40
- ✔ Tested To ETAG 020-01, Plastic Anchors For Multiple Use For Non-Structural Application

BRIGHT ZINC PLATED



Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NFF08080ETA	8	80	10	90	100	1.83	42.98
NFF08100ETA	8	100	30	90	100	2.28	48.23
NFF08120ETA	8	120	50	90	100	2.76	60.60
NFF08140ETA	8	140	70	90	50	3.24	75.25
NFF10080ETA	10	80	10	90	50	2.47	50.04
NFF10100ETA	10	100	30	90	50	3.14	61.91
NFF10120ETA	10	120	50	90	50	3.79	67.52
NFF10140ETA	10	140	70	90	50	4.43	82.02
NFF10160ETA	10	160	90	90	50	5.06	107.13



ETA HEXAGON HEAD NYLON FRAME FIXINGS BZP

- ✓ For Use In Solid And Hollow Base Materials
- ✓ Fire Resistance Loading
- ✓ Tested To ETAG 020-01, Plastic Anchors For Multiple Use For Non-Structural Application



**BRIGHT ZINC
PLATED**

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NFF08080ETAH	8	80	10	90	100	2.10	47.16
NFF08100ETAH	8	100	30	90	100	2.57	54.89
NFF08120ETAH	8	120	50	90	100	3.06	72.02
NFF08140ETAH	8	140	70	90	50	3.44	92.70
NFF10080ETAH	10	80	10	90	50	3.08	60.00
NFF10100ETAH	10	100	30	90	50	3.75	73.01
NFF10120ETAH	10	120	50	90	50	4.43	95.89
NFF10140ETAH	10	140	70	90	50	5.32	122.55
NFF10160ETAH	10	160	90	90	50	5.71	163.55



ETA COUNTERSUNK HEAD NYLON FRAME FIXINGS A4 STAINLESS STEEL

- ✓ For Use In Solid And Hollow Base Materials
- ✓ Countersunk Head Gives A Flush Finish
- ✓ Fire Resistance Loading
- ✓ TX Drive: 8mm - T30, 10mm - T40
- ✓ Tested To ETAG 020-01, Plastic Anchors For Multiple Use For Non-Structural Application
- ✓ Suitable For External Use And Marine Environments



**A4-316
STAINLESS STEEL**

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Max Fixture Thickness mm t_{fix}	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NFF08080ETASS	8	80	10	90	100	1.83	145.25
NFF08100ETASS	8	100	30	90	100	2.29	173.44
NFF08120ETASS	8	120	50	90	100	2.80	202.20
NFF08140ETASS	8	140	70	90	50	3.25	283.79
NFF10080ETASS	10	80	10	90	50	2.59	200.71
NFF10100ETASS	10	100	30	90	50	3.25	235.82
NFF10120ETASS	10	120	50	90	50	3.85	270.74
NFF10140ETASS	10	140	70	90	50	4.48	346.38
NFF10160ETASS	10	160	90	90	50	5.02	413.44



PLUGS

A range of plastic and metal plugs for various applications.

- ✔ Different Strengths Available
- ✔ Allow For Secure Fixings
- ✔ Standard And Premium Range Available



PUSH PLUGS

- ✔ For Retaining Damp-Proof Membranes
- ✔ No Expansion Forces
- ✔ Corrosion Resistant
- ✔ Grips The Hole With Flexible Wings

Part Number	Anchor Hole Size mm	Anchor Plug Length mm	Max Fixture Thickness mm	Min Hole Depth mm	Head Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
PP06035	6	35	5	45	13	100	0.10	4.16



NYLON WALL PLUGS


- ✔ For Use In Solid Base Materials
- ✔ Suitable For Wood And Chipboard Screws
- ✔ 2 Way Expansion
- ✔ Screw Guidance
- ✔ Rimless

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NP05	5	25	4-6	2.5-3.5	30	100	0.04	1.87
NP06	6	30	6-10	3.5-5.0	35	100	0.08	2.02
NP07	7	35	8-12	4.0-5.5	40	100	0.12	2.43
NP08	8	40	10-14	5.0-6.0	45	100	0.15	3.08
NP10	10	50	14-18	6.0-8.0	55	50	0.29	5.56
NP12	12	60	18-24	8.0-10.0	70	25	0.52	10.65
NP14	14	70	24-32	10.0-12.0	80	20	0.74	15.14



UNIVERSAL WALL PLUGS

- ✔ For Use In Solid And Hollow Base Materials




d_0 =Anchor Hole Size L_{plug} =Anchor Plug Length h_1 =Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NUP06035	6	40	6-8	3.5-4.0	45	200	0.04	2.68
NUP08050	8	50	10-12	4.5-5.5	55	100	0.12	5.19
NUP10060	10	60	12-14	5.5-6.0	65	50	0.15	7.83



PREMIUM NYLON WALL PLUGS

- ✔ For Use In Solid And Hollow Base Materials
- ✔ Suitable For Wood And Chipboard Screws
- ✔ 2 Way Expansion
- ✔ Rimless
- ✔ Anti-Rotation Lugs
- ✔ Castellated Split Guides Screw To Keep It Inside Plug



d_0 =Anchor Hole Size L_{plug} =Anchor Plug Length h_1 =Minimum Hole Depth

Part Number	Anchor Hole Size mm d_0	Anchor Plug Length mm L_{plug}	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NP06030	6	30	6-10	3.5-5.0	35	100	0.04	1.85
NP06055	6	55	6-10	3.5-5.0	60	100	0.07	2.22
NP08040	8	40	10-14	4.5 - 6.0	45	100	0.10	2.34
NP08060	8	60	10-14	4.5 - 6.0	70	100	0.16	3.03
NP10080	10	80	14-18	6.0 - 8.0	90	100	0.30	5.78
NP12055	12	55	18-24	8.0 - 10.0	60	100	0.26	4.73

JCP STANDARD PLASTIC PLUGS

- ✔ Supplied On A Sprue
- ✔ For Use In Solid And Hollow Base Materials
- ✔ Supplied In Outers Of 1,000
- ✔ Suitable For Standard Trade Requirements

Part Number	Colour	Drill Diameter mm	Plug Length mm	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 1000
AYP	Yellow	5	22	4-8	2.5-4.0	30	100	0.40	11.23
ARP	Red	5.5	30	6-10	3.5-5.0	40	100	0.64	11.38
ABP	Brown	7	37	10-14	5.0-6.0	45	100	1.12	16.27



AYP



ARP



ABP

JCP BULK PLASTIC PLUGS

- ✔ Supplied Loose


Part Number	Colour	Drill Diameter mm	Plug Length mm	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 1000
LBARP	Red	6	37	6-10	3.5-5.0	40	10000	1.05	9.50
LBABP	Brown	7	37	10-14	5.0-6.0	45	5000	1.35	13.46



**FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS
ACROSS THE MAJORITY OF THE UK MAINLAND.**

JCP PREMIUM PLASTIC PLUGS

- ✔ Supplied On A Sprue ✔ For Use In Concrete And Masonry Base Materials ✔ Supplied In Outers Of 1,000
- ✔ Suitable For Wood And Chipboard Screws



d_0 =Anchor Hole Size L_{plug} =Anchor Plug Length h_1 =Minimum Hole Depth

Part Number	Colour	Drill Diameter mm d_0	Plug Length mm L_{plug}	Woodscrew Gauge No mm	Metric Screw Size mm	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JCPRED	Red	6	37	6-10	3.5-5.0	45	100	1.05	13.19
JCPBROWN	Brown	7	37	10-14	5.0-6.0	45	100	1.35	16.12



JCPRED



JCPBROWN



METAL EXPANSION PLUGS

- ✔ For Use In Concrete, Masonry And Aerated Concrete Blocks ✔ 4 Segment Design ✔ For Use With Woodscrews

Part Number	Drill Diameter mm d_0	Plug Length mm L_{plug}	Screw Size mm	Min Hole Depth mm h_1	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
MP05030	5	30	4.5	40	100	0.20	5.37
MP06032	6	32	4.5-5.0	40	100	0.20	6.16
MP08038	8	38	5.0-6.0	50	100	0.60	10.14
MP08060	8	60	5.0-6.0	70	50	1.00	12.70




CAVITY FIXINGS

A range of fixings to suit all plasterboard and cavity applications.

- ✔ Secure And Solid Fixing
- ✔ All-Metal, Nylon And Spring Toggles Available

J-PLUG PLASTERBOARD FIXINGS

- ✔ Comes Complete With Screw
- ✔ Self-Drilling
- ✔ Compatible With Hand Or Power Screwdrivers

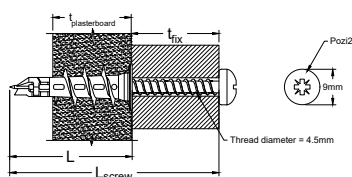

L_{screw} = Screw Length t_{fix} = Maximum Fixture Thickness

Part Number	Screw Thread Diameter mm	Screw Length mm L_{screw}	Max. Fixture Thickness mm t_{fix}	Hole Depth mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
JJP15	4.5	35	15	37	100	0.50	17.73
JJP30	4.5	50	30	37	100	0.60	19.28
JJP15A	4.5	35	15	32	100	0.50	16.95
JJP30A	4.5	50	30	32	100	0.65	17.93
JJPN10A	4.5	30	10	29	100	0.20	8.27



JJP15/30
Zinc Alloy



JJP15A/30A
Zinc Alloy




JJPN10A
Nylon

ROSETT CAVITY FIXINGS

For use in plasterboard and other materials where a fixing into a cavity is required.

- ✔ Single And Double Skin Plasterboard Options Available
- ✔ Heavy Duty
- ✔ 30% Glass Fibre Re-Enforced Thread
- ✔ Minimum 5µm



L_{screw} = Screw Length t_{wall} = Wall Thickness t_{fix} = Maximum Fixture Thickness d_0 = Hole Diameter

Part Number	Screw Length mm L_{screw}	Wall Thickness mm t_{wall}	Max. Fixture Thickness mm t_{fix}	Hole Diameter mm d_0	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
BR05055	55	9-18	15	10	25	1.17	70.26
BR05080	85	9-18	40	10	25	1.49	74.66
RR05065	65	18-30	12	10	25	1.35	73.57
RR05090	90	18-30	38	10	25	1.66	80.96
BRHOOK	-	9-18	-	10	25	1.55	113.26
RRHOOK	-	18-30	-	10	25	1.78	114.71



BR05055
Pan Head



RR05065
Pan Head



BRHOOK
Hook




RRHOOK
Hook



ANKERNUTS

- ✔ For Use In Hollow Materials And Occasional Use In Solid Materials
- ✔ Flange Head
- ✔ Vibration Resistant
- ✔ Synthetic Rubber Sleeve (EPDM) With Brass Threaded Insert
- ✔ Ideal For Irregular Shaped Holes

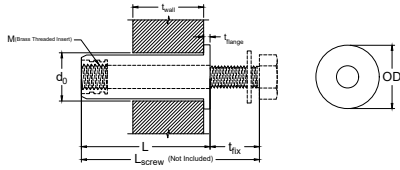

M=Thread Diameter d_0 =Hole Diameter t_{wall} =Wall Thickness L=Length t_{flange} =Flange Thickness OD=Flange Diameter

Part Number	Thread Diameter M	Hole Diameter mm d_0	Wall Thickness mm t_{wall}	Length mm L	Flange Thickness mm t_{flange}	Flange Diameter mm OD	Rec. Tightening Torque mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LNN03024	3	8	2.0-15.0	24	1	11	1	50	0.17	23.55
LNN04011	4	8	0.4-2.0	13	1	11	1	50	0.19	23.08
LNN04024	4	8	2.0-15.0	25	1	11	1	50	0.30	23.55
LNN05015	5	10	0.4-4.0	14	1	13	1.8	50	0.24	27.74
LNN05025	5	10	8.0-16.0	25	1.3	14	1.8	50	0.36	33.83
LNN05040	5	10	20.0-30.0	40	1.3	14	1.8	50	0.40	35.05
LNN06015	6	13	0.4-3.0	15	1.3	16	4	50	0.42	47.54
LNN06025	6	13	6.0-12.0	25	1.3	16	4	50	0.58	37.47
LNN06035	6	13	12.0-25.0	35	1.3	16	4	50	0.78	41.52
LNN06050	6	13	25.0-40.0	50	1.3	16	4	50	0.85	47.54
LNN08025	8	18	4.0-10.0	25	1.3	22	8	50	1.12	67.45
LNN08050	8	18	25.0-35.0	50	1.6	20	8	50	1.88	75.30
LNN10055	10	20	25.0-35.0	55	1.3	22.5	10	25	2.28	160.30
LNN12075	12	24	35.0-45.0	75	1.3	27	15	20	4.00	219.12
LNN12125	12	24	35.0-45.0	125	1.3	27	15	20	7.50	355.35

ROAD FIXING KIT

- ✔ For Attaching Fixtures To Tarmac
- ✔ Complete With Bolt
- ✔ For Fixing Down Speed Ramps, Smoking Shelters, Bicycle Storage Racks And Other Non-Structural Applications




Part Number	Description	Price £ Per Each
RFK12125	4 x M12 x 125 Anker nuts C/W M12 x 160 Set Bolt and Washer	11.09

HOLLOW WALL ANCHORS ZYP

ZINC AND YELLOW PLATED

- ✔ Provides A Strong, Permanent Anchorage To Plasterboard And Other Partition Materials
- ✔ Five Way Expansion
- ✔ All Metal Expanding Cavity Anchor
- ✔ Anti-Rotation Lugs
- ✔ Flange Head
- ✔ Complete With Pan Head Screws



L_{screw} =Screw Size t_{wall} =Wall Thickness t_{fix} =Maximum Fixture Thickness d_0 =Hole Diameter M^* =Thread Diameter
M=See the technical data sheet on www.jcpfixings.co.uk for details*

Part Number	Screw Size mm L_{screw}	Wall Thickness mm t_{wall}	Max Fixture Thickness mm t_{fix}	Hole Diameter mm d_0	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LHWA04025	M4 X 25	0-4	10	7	100	0.46	12.36
LHWA04045	M4 X 45	8-13	15	7	100	0.75	12.69
LHWA04050	M4 X 50	16-20	15	7	100	0.86	14.03
LHWA04065	M4 X 65	22-27	30	7	100	0.96	16.15
LHWA05045	M5 X 45	5-10	15	9	100	1.35	19.17
LHWA05060	M5 X 60	5-13	23	9	50	1.68	22.56
LHWA05070	M5 X 70	17-25	23	9	50	1.80	25.09
LHWA06060	M6 X 60	7-13	23	10	50	2.22	28.06
LHWA06070	M6 X 70	16-24	24	10	50	2.68	31.90

HOLLOW WALL ANCHOR SETTING TOOL

- ✔ For Rapid Installation Of Hollow Wall Anchors
- ✔ Eliminates The Need For A Screwdriver




Part Number	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per Each
LHWAST	1	0.45	14.30



SPRING TOGGLES ZYP

ZINC AND YELLOW PLATED

- ✔ Can Be Used In Virtually Any Cavity Or Blind Fixing Situation From Hardboard To Hollow Steel Sections
- ✔ Various Sizes To Suit Different Wall Thicknesses
- ✔ Complete With Screws

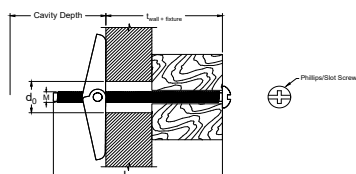

M=Thread Diameter L_{screw}=Screw Length t_{wall+ fixture}=Wall and Fixture Thickness d₀=Hole Diameter

Part Number	Thread Diameter M	Screw Length mm L _{screw}	Wall and Fixture Thickness mm t _{wall+ fixture}	Cavity Depth mm	Hole Diameter mm d ₀	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LST03050	3	50	30	20	11	100	0.52	20.71
LST05050	5	50	20	30	14	100	1.27	23.38
LST05075	5	75	45	30	14	100	1.62	29.27
LST05100	5	100	70	30	14	100	1.88	30.48
LST06075	6	75	45	30	18	100	2.58	39.66



SPRING TOGGLES (WINGS ONLY) ZYP

ZINC AND YELLOW PLATED

- ✔ Can Be Used In Virtually Any Cavity Or Blind Fixing Situation
- ✔ Various Sizes To Suit Different Wall Thicknesses

Part Number	Thread Diameter M	Cavity Depth mm	Hole Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
LSTM03	3	20	11	100	0.34	9.80
LSTM05	5	30	14	100	0.63	11.35
LSTM06	6	30	18	100	0.97	13.83
LSTM08	8	40	22	50	1.66	29.41
LSTM10	10	40	25	50	2.64	31.96



PLASTIC TOGGLES

- ✔ For Use In Hollow And Cavity Applications
- ✔ Quick And Easy To Apply
- ✔ Use With Standard Woodscrew
- ✔ Light Duty Applications

Part Number	Woodscrew Size mm	Woodscrew Gauge mm	Wall Thickness mm	Minimum Cavity Depth mm	Hole Diameter mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
NT10	4.5	8	4-12	30	10	100	0.23	11.01
NT12	4.5	8	15-19	35	10	100	0.25	11.97
NT16	4.5	8	24-28	40	10	100	0.25	12.95



GAS NAILS

A range of gas nails and fuel cell packs for fixing timber to timber (first fix).

- ✔ Highest Quality
- ✔ CE Marked Available
- ✔ Additional Fuel Cells Available
- ✔ Stainless Steel For External Use




CLIPPED HEAD DRIVEFAST GAS NAILS

- ✔ 34° Angled Clipped Head Nails
- ✔ Includes 2 Fuel Cell Packs
- ✔ Conform To Eurocode 5 Service Class 1
- ✔ 1 Fuel Cell Per 1,100 Nails
- ✔ Suitable For Use In Drivefast DF90, IM350, NR90GC2, GN900S, WW90CH, GS690CH, GT90CH And D90S



In accordance with
BS EN 14592:2008+A1:2002

Part Number	Nail Length mm	Shank Diameter mm	Description	Quantity Per Box	Ship Wt.Kg Per Box	Price £ Per Box
IM35051RB	51	2.8	1 Ring Bright	2,200	10.50	65.73
IM35063RB	63	2.8	1 Ring Bright	2,200	12.10	73.33
IM35075RB	75	3.1	1 Ring Bright	2,200	12.60	85.71
IM35051EG	51	2.8	2 Ring Electro Galv	2,200	10.50	72.42
IM35063EG	63	2.8	2 Ring Electro Galv	2,200	12.10	81.77
IM35075EG	75	3.1	2 Ring Electro Galv	2,200	12.60	92.40
IM35063RG	63	2.8	3 Ring Hot Dip Galv	2,200	12.10	90.93
IM35075RG	75	3.1	3 Ring Hot Dip Galv	2,200	12.60	87.63
IM35090SB	90	3.1	4 Ring Smooth Bright	2,200	12.60	78.65
IM35090EG	90	3.1	5 Smooth Electro Galv	2,200	12.60	99.55
IM35090SG	90	3.1	6 Screwed Electro Galv	2,200	12.60	106.61

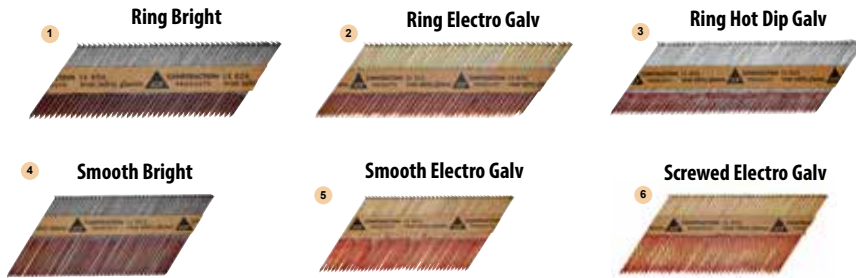

STAINLESS STEEL CLIPPED HEAD DRIVEFAST GAS NAILS

A2-304
STAINLESS STEEL

- ✔ 34° Angled Ring Clipped Nails
- ✔ Includes Fuel Cell Pack
- ✔ Conform To Eurocode 5 Service Classes 1, 2, And 3
- ✔ 1 Fuel Cell Per 1,000 Nails
- ✔ Suitable For External Use

Part Number	Nail Length mm	Shank Diameter mm	Quantity Per Box	Ship Wt.Kg Per Box	Price £ Per Box
IM35051SS	51	2.8	1000	4.75	124.42
IM35063SS	63	2.8	1000	4.80	161.29
IM35080SS	80	3.1	1000	5.75	200.08
IM35090SS	90	3.1	1000	6.00	191.21






CLIPPED HEAD HANDI PACK DRIVEFAST GAS NAILS

- ✔ 34° Angled Clipped Head Nails
- ✔ Includes Fuel Cell Pack
- ✔ Conform To Eurocode 5 Service Class 1
- ✔ 1 Fuel Cell Per 1,000 Nails

Part Number	Nail Length mm	Shank Diameter mm	Description	Quantity Per Box	Ship Wt.Kg Per Box	Price £ Per Box
HAN51RB	51	2.8	1 Ring Bright	1000	4.75	33.33
HAN63RB	63	2.8	1 Ring Bright	1000	4.75	34.92
HAN75RB	75	2.8	1 Ring Bright	1000	4.75	36.58
HAN51EG	51	2.8	2 Ring Electro Galv	1000	4.75	35.46
HAN63EG	63	2.8	2 Ring Electro Galv	1000	4.75	41.67
HAN75EG	75	3.1	2 Ring Electro Galv	1000	6.00	46.04
HAN90SB	90	3.1	3 Ring Smooth Bright	1000	6.00	41.67
HAN90EG	90	3.1	4 Smooth Electro Galv	1000	6.00	51.79
HAN90SG	90	3.1	5 Screwed Electro Galv	1000	6.00	49.04

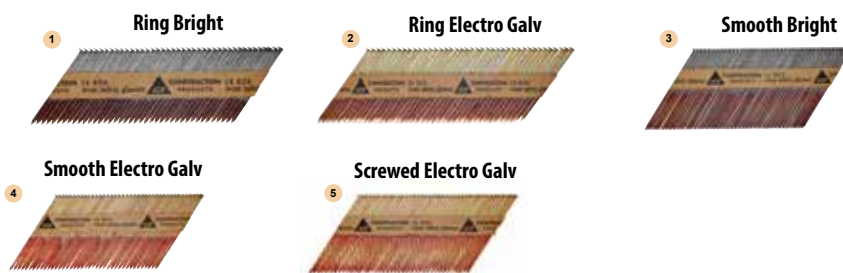

BRAD NAILS AND GAS

- ✔ 16 Gauge Straight Brads
- ✔ For Use In IM250, NT65GS And DC616KB
- ✔ Includes 2 Fuel Cell Packs
- ✔ 1 Fuel Cell Per 1000 Nails
- ✔ Conform To Eurocode 5 Service Classes 1, 2, And 3

16 Gauge Galvanised Straight Brad Nails							
Part Number	Nail Length mm	Shank Diameter mm	Description	Quantity Per Outer Box	Quantity Per Inner Box	Ship Wt.Kg Per Box	Price £ Per Box
IM25038G	38	F16	Straight Brad	8000	2000	5.00	36.00
IM25050G	50	F16	Straight Brad	8000	2000	7.00	52.58
IM25064G	64	F16	Straight Brad	8000	2000	8.00	58.33
Stainless Steel Brad Nails							
Part Number	Nail Length mm	Shank Diameter mm	Description	Quantity Per Outer Box	Quantity Per Inner Box	Ship Wt.Kg Per Box	Price £ Per Box
IM25038SS	38	F16	Straight Brad	-	2000	5.00	366.83
IM25050SS	50	F16	Straight Brad	-	2000	7.00	458.33
16 Gauge Galvanised Angled Brad Nails							
Part Number	Nail Length mm	Shank Diameter mm	Description	Quantity Per Outer Box	Quantity Per Inner Box	Ship Wt.Kg Per Box	Price £ Per Box
IM25038A	38	F16	Angled Brad	8000	2000	5.00	39.17
IM25050A	50	F16	Angled Brad	8000	2000	7.00	46.17



DRIVEFAST GAS ONLY

- ✔ To Suit The Drivefast DF90 And The Paslode Im350
- ✔ Mix Of Propane And Butane To Optimise Performance
- ✔ Contains A Top Grade Mobil Fully Synthetic Lubrication Oil To Protect The Tool

Part Number	Description	Quantity Per Inner Box	Price £ Per Each
IMGAS250	To suit IM250/IM250A	1	16.67
IMGAS350	To suit IM350/DF90	1	17.29





CARTRIDGE TOOLS AND ACCESSORIES

Cartridge tool, strips and pins for fastening wood or sheet metal to concrete, steel or brick.

- ✔ Easy Installation
- ✔ Strong Fixing
- ✔ Concrete, Steel And Masonry Subject To Correct Selection And Application



CEILING HANGERS

- ✔ Suspension Clip Suitable For 8mm Cartridge Tools

Part Number	Shank Diameter mm	Shank Length mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
VCH32	3.8	32	100	0.64	27.10

PA97 CARTRIDGE TOOL KIT

Strip feed tool with power adjuster suitable for 12mm metal washered drive pins up to 97mm long. (82mm and 97mm pins require pre-driving).



- ✔ A Low Velocity, Indirect Acting Tool
- ✔ Comes Complete With Carry Case
- ✔ Portable And Robust
- ✔ Spare Parts Available

Part Number	Description	Quantity Per Unit	Ship Wt.Kg Per Each	Price £ Per Each
PA97KIT	Strip Feed Cartridge Tool C/W Kit in Toolbox	1	4.90	695.00



PA97

Safety Goggles



Retaining Ring



Spall Shield



Stop Ring




Cleaning Brushes



CARTRIDGE STRIPS

- ✔ Suitable For PA97 And Most Other Strip Fed Tools
- ✔ Colour Coded For Strength Indication

Part Number	Colour	Strength	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
V4LVS27Y	Yellow	Low/Medium	100	0.14	25.42
V6REDLVS27	Red	Medium/High	100	0.14	25.42
V7BLKLVS27	Black	Extra High	100	0.14	31.49





SHOT FIRED PINS

- ✔ For Fixing Into Steel And Concrete
- ✔ Suitable For Use In The PA97, DX450 and Other Cartridge Tools That Take Metal Washered Drive Pins
- ✔ 12mm Steel Washer For Guidance Within The Tool
- ✔ Increased Pull-Over Strength When Fixing Softer Materials

Part Number	Shank Diameter mm	Shank Length mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
VMW16	3.7	16	100	0.25	8.11
VMW19	3.7	19	100	0.28	8.11
VMW22	3.7	22	100	0.31	7.82
VMW27	3.7	27	100	0.40	8.18
VMW32	3.7	32	100	0.46	8.48
VMW37	3.7	37	100	0.48	9.28
VMW42	3.7	42	100	0.54	10.16
VMW47	3.7	47	100	0.58	10.16
VMW52	3.7	52	100	0.66	11.76
VMW57	3.7	57	100	0.67	12.35
VMW62	3.7	62	100	0.68	12.57
VMW72	3.7	72	100	0.77	14.32
VMW82	3.7	82	100	0.99	17.83
VMW97	3.7	97	100	1.21	19.80



PLASTIC WASHERED PINS

- ✔ For Fixing Into Steel And Concrete
- ✔ Suitable For Use In 8mm Cartridge Tools
- ✔ 8mm Plastic Washer For Guidance Within The Tool

Part Number	Shank Diameter mm	Shank Length mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
VPW16	3.8	16	100	0.17	7.16
VPW19	3.8	19	100	0.20	7.67
VPW22	3.8	22	100	0.22	7.23
VPW27	3.8	27	100	0.27	7.97
VPW32	3.8	32	100	0.32	8.62
VPW37	3.8	37	100	0.40	9.36
VPW42	3.8	42	100	0.42	10.09
VPW47	3.8	47	100	0.46	10.74
VPW52	3.8	52	100	0.52	11.55
VPW57	3.8	57	100	0.59	12.20
VPW62	3.8	62	100	0.66	12.86
VPW72	3.8	72	100	0.76	13.67



MAGAZINE PINS

- ✔ For Fixing Into Steel And Concrete
- ✔ Suitable For Use In 8mm Magazine Cartridge Tools
- ✔ Magazine Ensures Swift And Accurate Deployment

Part Number	Shank Diameter mm	Shank Length mm	Quantity Per Box	Ship Wt.Kg Per 100	Price £ Per 100
VSN19	3.8	19	100	0.25	8.84
VSN22	3.8	22	100	0.27	8.40
VSN27	3.8	27	100	0.32	9.14
VSN32	3.8	32	100	0.37	9.87
VSN37	3.8	37	100	0.45	10.53
VSN42	3.8	42	100	0.47	11.26
VSN47	3.8	47	100	0.51	11.92
VSN52	3.8	52	100	0.57	12.57
VSN57	3.8	57	100	0.64	13.37
VSN62	3.8	62	100	0.66	14.03
VSN72	3.8	72	100	0.81	14.69



DRILL BITS

A range of drill bits for various uses including drilling into harder materials, masonry, stainless steel and wood.

- ✔ Heavy Duty Drilling Options
- ✔ Sets Available



SDS+ DRILL BITS

- ✔ For Drilling Into Concrete, Natural Stone And Masonry
- ✔ High Strength Steel To Avoid Bending Or Snapping
- ✔ Tungsten Carbide Tip
- ✔ Heavy Duty Drilling
- ✔ Two Tungsten Carbide Cutting Edges

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
SD04110	4.0	50	110	1.42
SD05110	5.0	50	110	1.46
SD05160	5.0	100	160	1.62
SD55110	5.5	50	110	1.46
SD55160	5.5	100	160	1.62
SD55210	5.5	150	210	1.99
SD06110	6.0	50	110	1.46
SD06160	6.0	100	160	1.62
SD06200	6.0	150	200	1.99
SD06260	6.0	200	260	2.55
SD65110	6.5	50	110	1.54
SD65160	6.5	100	160	1.66
SD65210	6.5	150	210	2.07
SD65250	6.5	200	250	2.23
SD07110	7.0	50	110	1.62
SD07160	7.0	100	160	1.78
SD07210	7.0	150	210	2.19
SD08110	8.0	50	110	1.62
SD08160	8.0	100	160	1.74
SD08210	8.0	150	210	2.19
SD08260	8.0	200	260	2.55
SD08450	8.0	400	450	4.46
SD08600	8.0	550	600	5.76
SD10110	10.0	50	110	1.87
SD10160	10.0	100	160	1.99
SD10210	10.0	150	210	2.47
SD10260	10.0	200	260	2.76
SD10450	10.0	400	450	4.54
SD12160	12.0	100	160	2.39
SD12210	12.0	150	210	2.76
SD12260	12.0	200	260	3.04
SD12300	12.0	250	300	3.37
SD12450	12.0	400	450	4.87
SD12600	12.0	550	600	6.08

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
SD13160	13.0	100	160	2.84
SD13210	13.0	150	210	3.04
SD13260	13.0	200	260	3.24
SD14160	14.0	100	160	2.92
SD14210	14.0	150	210	3.33
SD14300	14.0	250	300	4.01
SD14450	14.0	400	450	5.76
SD14600	14.0	550	600	7.10
SD15160	15.0	100	160	3.53
SD15260	15.0	200	260	4.34
SD16210	16.0	150	210	3.93
SD16300	16.0	250	300	4.66
SD16450	16.0	400	450	6.69
SD16600	16.0	550	600	8.31
SD18200	18.0	150	200	5.27
SD18450	18.0	400	450	8.68
SD20200	20.0	150	200	6.00
SD20300	20.0	250	300	7.34
SD20450	20.0	400	450	10.02
SD22250	22.0	200	250	8.03
SD22450	22.0	400	450	11.36
SD24260	24.0	200	260	10.38
SD24450	24.0	400	450	14.40
SD25250	25.0	200	250	10.71
SD25450	25.0	400	450	14.72
SD26450	26.0	400	450	15.01
SD28450	28.0	400	450	15.82
SD30450	30.0	400	450	20.68



SDS+ HIGH PERFORMANCE DRILL BITS



- ✔ For Drilling Into Reinforced Concrete, Natural Stone And Masonry
- ✔ Force X Drill Bit
- ✔ Four Tungsten Carbide Cutting Edges
- ✔ Four Flute Design For More Efficient Dust Removal
- ✔ Long Lasting And Long Service Life
- ✔ Heavy Duty Drilling

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
SDHP05110	5.0	50	110	7.00
SDHP05160	5.0	100	160	7.60
SDHP55110	5.5	50	110	7.21
SDHP55160	5.5	100	160	7.92
SDHP06110	6.0	50	110	6.84
SDHP06160	6.0	100	160	7.55
SDHP06210	6.0	150	210	10.07
SDHP06260	6.0	200	260	13.61
SDHP65210	6.5	150	210	13.07
SDHP65260	6.5	200	260	18.20
SDHP07110	7.0	50	110	9.19
SDHP07160	7.0	100	160	9.98
SDHP08110	8.0	50	110	7.99
SDHP08160	8.0	100	160	8.73
SDHP08210	8.0	150	210	9.82
SDHP10110	10.0	50	110	8.57
SDHP10160	10.0	100	160	10.29
SDHP10210	10.0	150	210	11.30
SDHP10260	10.0	200	260	14.53
SDHP10450	10.0	400	450	32.46

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
SDHP12160	12.0	100	160	12.40
SDHP12210	12.0	150	210	13.70
SDHP12260	12.0	200	260	17.19
SDHP12450	12.0	400	450	35.23
SDHP14160	14.0	100	160	16.33
SDHP14210	14.0	150	210	22.39
SDHP14310	14.0	250	310	27.83
SDHP15160	15.0	100	160	23.09
SDHP16210	16.0	150	210	27.72
SDHP16310	16.0	250	310	38.82
SDHP16450	16.0	400	450	47.29
SDHP18250	18.0	200	250	41.95
SDHP18450	18.0	400	450	52.34
SDHP20250	20.0	200	250	46.10
SDHP20450	20.0	350	400	59.40
SDHP22250	22.0	200	250	53.30
SDHP22450	22.0	400	450	70.39

SDS MAX DRILL BITS



- ✔ For Drilling Into Concrete, Natural Stone And Masonry
- ✔ Cross Head Design
- ✔ Four Tungsten Carbide Cutting Edges
- ✔ Four Cutting Heads
- ✔ High Efficiency
- ✔ For SDS Max Heavy Duty Hammer Drilling

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
MAX12340	12.0	188	340	9.17
MAX12540	12.0	388	540	17.33
MAX13340	13.0	188	340	9.56
MAX13540	13.0	388	540	16.56
MAX14340	14.0	188	340	10.17
MAX14540	14.0	388	540	16.83
MAX14690	14.0	538	690	21.28
MAX15340	15.0	188	340	12.67
MAX15540	15.0	388	540	17.72
MAX16340	16.0	188	340	11.44
MAX16540	16.0	388	540	16.67
MAX16690	16.0	538	690	20.11
MAX18340	18.0	188	340	12.50
MAX18540	18.0	388	540	17.67
MAX20370	20.0	218	370	13.17
MAX20520	20.0	368	520	18.78
MAX20920	20.0	768	920	53.11
MAX22370	22.0	218	370	17.44
MAX22520	22.0	368	520	19.78
MAX22920	22.0	768	920	46.83

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
MAX24370	24.0	218	370	16.78
MAX24520	24.0	368	520	23.17
MAX25320	25.0	168	320	17.50
MAX25520	25.0	368	520	23.44
MAX25920	25.0	768	920	53.28
MAX26370	26.0	218	370	21.61
MAX26520	26.0	368	520	26.11
MAX28370	28.0	218	370	23.33
MAX28570	28.0	418	570	30.11
MAX30370	30.0	218	370	30.00
MAX30570	30.0	418	570	36.28
MAX32370	32.0	218	370	32.72
MAX32570	32.0	418	570	43.78
MAX32920	32.0	768	920	79.00
MAX35570	35.0	418	570	53.61
MAX38570	38.0	418	570	68.22
MAX40570	40.0	418	570	90.28

SDS+ DRILL BIT SETS

- For Drilling Into Concrete, Natural Stone And Masonry
- High Strength Steel To Avoid Bending Or Snapping
- Tungsten Carbide Tip Heavy Duty Drilling Two Tungsten Carbide Cutting Edges

Part Number	Description	Price £ Per Each
SDSET5	5 Piece Set - 5, 5.5, 6, 7 and 8mm	8.39
SDSET8	8 Piece Set - 5, 5.5, 6, 6.5, 7, 8, 10 and 12mm	15.01



SDSET5



SDSET8

MASONRY DRILL BITS



- For Drilling Into Brick, Block And Natural Stone Straight Shank For Percussion And Rotary Drilling
- Tungsten Carbide Tip For Greater Wear Size Stamped On Body

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
JMD04085	4.0	50	85	1.01
JMD45085	4.5	50	85	1.01
JMD05085	5.0	50	85	1.06
JMD05150	5.0	90	150	1.54
JMD55100	5.5	60	100	1.06
JMD55150	5.5	90	150	1.59
JMD06100	6.0	60	100	1.12
JMD06150	6.0	90	150	1.70
JMD06200	6.0	140	200	2.02
JMD65100	6.5	60	100	1.12
JMD65150	6.5	90	150	1.70
JMD65400	6.5	300	400	7.33
JMD07100	7.0	60	100	1.28
JMD07150	7.0	90	150	1.70
JMD08120	8.0	80	120	1.43
JMD08150	8.0	90	150	1.70
JMD08200	8.0	140	200	2.13
JMD08300	8.0	240	300	3.19
JMD08400	8.0	300	400	5.85
JMD10120	10.0	80	120	1.70
JMD10150	10.0	90	150	1.97
JMD10200	10.0	140	200	2.34
JMD10300	10.0	240	300	3.24
JMD10400	10.0	300	400	4.52
JMD10600	10.0	500	600	7.55
JMD101000	10.0	900	1000	16.74

Part Number	Diameter mm	Working Length mm	Overall Length mm	Price £ Per Each
JMD12150	12.0	90	150	2.60
JMD12200	12.0	140	200	2.71
JMD12300	12.0	240	300	3.61
JMD12400	12.0	300	400	6.32
JMD12600	12.0	500	600	7.97
JMD13400	13.0	300	400	6.64
JMD14150	14.0	90	150	3.83
JMD14200	14.0	140	200	5.05
JMD14400	14.0	300	400	6.32
JMD16150	16.0	90	150	4.25
JMD16200	16.0	140	200	5.21
JMD16300	16.0	240	300	5.90
JMD16400	16.0	300	400	6.96
JMD18200	18.0	140	200	6.16
JMD20160	20.0	100	160	7.23
JMD20200	20.0	140	200	7.71
JMD20300	20.0	240	300	8.61
JMD20400	20.0	300	400	9.94
JMD25160	25.0	100	160	8.61
JMD25200	25.0	140	200	10.42
JMD25300	25.0	240	300	12.22
JMD25400	25.0	300	400	14.93

MASONRY DRILL BIT SETS



- For Drilling Into Brick, Block And Natural Stone Straight Shank For Percussion And Rotary Drilling
- Tungsten Carbide Tip For Greater Wear Size Stamped On Body

Part Number	Description	Price £ Per Each
JMDSET5	5 Piece Set - 5, 5.5, 6, 7 and 8mm	6.25



HSS DRILL BITS



- For Drilling Into Alloyed Carbon And Plain Steel
- Ideal For Handheld Operations
- Twist Drill
- Hardwearing
- 135° Split Point Prevents Bit From Drifting And Enables Faster Penetration

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each	Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSS010	1.0	34	10	1.02	HSS062	6.2	101	10	2.25
HSS015	1.5	40	10	1.02	HSS064	6.4	101	10	2.25
HSS016	1.6	43	10	1.08	HSS065	6.5	101	10	2.25
HSS020	2.0	49	10	1.02	HSS066	6.6	101	10	2.38
HSS022	2.2	53	10	1.08	HSS068	6.8	109	10	2.63
HSS024	2.4	57	10	1.08	HSS070	7.0	109	10	2.63
HSS025	2.5	57	10	1.02	HSS072	7.2	109	10	2.77
HSS026	2.6	57	10	1.08	HSS075	7.5	109	10	3.02
HSS028	2.8	61	10	1.08	HSS078	7.8	117	10	3.27
HSS030	3.0	61	10	1.02	HSS080	8.0	117	10	3.27
HSS032	3.2	65	10	1.18	HSS082	8.2	117	10	3.52
HSS033	3.3	65	10	1.29	HSS085	8.5	117	10	3.65
HSS034	3.4	70	10	1.29	HSS088	8.8	125	10	3.95
HSS035	3.5	70	10	1.29	HSS090	9.0	125	10	3.95
HSS036	3.6	70	10	1.29	HSS094	9.4	125	10	4.31
HSS038	3.8	75	10	1.29	HSS095	9.5	125	10	4.31
HSS040	4.0	75	10	1.27	HSS098	9.8	133	10	4.67
HSS042	4.2	75	10	1.38	HSS100	10.0	133	5	4.67
HSS045	4.5	80	10	1.52	HSS102	10.2	133	5	4.67
HSS048	4.8	86	10	1.52	HSS105	10.5	133	5	5.22
HSS050	5.0	86	10	1.69	HSS110	11.0	142	5	6.08
HSS052	5.2	86	10	1.69	HSS115	11.5	142	5	6.42
HSS055	5.5	93	10	1.77	HSS120	12.0	151	5	7.31
HSS058	5.8	93	10	2.05	HSS125	12.5	151	5	7.69
HSS060	6.0	93	10	2.12	HSS130	13.0	151	5	7.95



HSS DRILL BITS (Imperial)



- For Drilling Into Alloyed Carbon And Plain Steel
- Ideal For Handheld Operations
- Twist Drill
- Hardwearing
- 135° Split Point Prevents Bit From Drifting And Enables Faster Penetration

Part Number	Diameter "	Overall Length mm	Pack Quantity	Price £ Per Each
HSSI00116	1/16	43	10	1.08
HSSI00332	3/32	57	10	1.08
HSSI00764	7/64	61	10	1.08
HSSI00108	1/8	65	10	1.18
HSSI00964	9/64	70	10	1.29
HSSI00532	5/32	75	10	1.27
HSSI001164	11/64	80	10	1.38
HSSI00316	3/16	80	10	1.52
HSSI001364	13/64	86	10	1.69
HSSI00732	7/32	93	10	2.05
HSSI00104	1/4	101	10	2.25
HSSI001764	17/64	109	10	2.63
HSSI00932	9/32	109	10	2.77
HSSI00516	5/16	117	10	3.27
HSSI001132	11/32	125	10	3.78
HSSI00308	3/8	133	10	4.31
HSSI001332	13/32	133	5	4.67
HSSI00716	7/16	142	5	6.08
HSSI00102	1/2	151	5	7.95

COBALT HSS DRILL BITS

- ✔ For Drilling Into High Alloyed Steels, Bearing Steels, Hot/Cold Rolled Steel, And Stainless Steel
- ✔ Long Lasting Performance ✔ Cobalt Alloy ✔ Ideal For Handheld Operations



Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
COB020	2.0	49	10	3.48
COB025	2.5	57	10	3.75
COB030	3.0	61	10	3.75
COB033	3.3	65	10	4.24
COB035	3.5	70	10	4.24
COB040	4.0	75	10	4.52
COB042	4.2	75	10	5.63
COB045	4.5	80	10	5.72
COB050	5.0	86	10	5.53
COB055	5.5	93	10	7.67
COB060	6.0	93	10	7.21
COB065	6.5	101	10	8.15
COB068	6.8	109	10	9.59
COB070	7.0	109	10	8.55
COB075	7.5	109	10	9.04

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
COB080	8.0	117	10	11.30
COB085	8.5	117	10	11.08
COB090	9.0	125	10	14.49
COB095	9.5	125	10	16.93
COB100	10.0	133	5	16.41
COB105	10.5	133	5	23.72
COB110	11.0	142	5	26.27
COB115	11.5	142	5	33.30
COB120	12.0	151	5	37.82
COB125	12.5	151	5	45.16
COB130	13.0	151	1	48.55

HSS DRILL BITS (In Wallets)

- ✔ For Drilling Into Alloyed Carbon And Plain Steel ✔ Hardwearing ✔ Ideal For Handheld Operations
- ✔ 135° Split Point Prevents Bit From Drifting And Enables Faster Penetration ✔ Twist Drill



Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSSW010	1.0	34	3	3.92
HSSW015	1.5	40	3	3.92
HSSW020	2.0	49	3	3.92
HSSW025	2.5	57	3	3.92
HSSW030	3.0	61	3	3.92
HSSW035	3.5	70	2	3.53
HSSW040	4.0	75	2	3.53
HSSW045	4.5	80	2	3.99
HSSW050	5.0	86	2	4.34
HSSW055	5.5	93	2	4.49
HSSW060	6.0	93	2	5.17
HSSW065	6.5	101	1	3.27

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSSW070	7.0	109	1	3.62
HSSW075	7.5	109	1	3.99
HSSW080	8.0	117	1	4.21
HSSW085	8.5	117	1	4.58
HSSW090	9.0	125	1	4.79
HSSW095	9.5	125	1	5.11
HSSW100	10.0	133	1	5.53
HSSW105	10.5	133	1	6.00
HSSW110	11.0	142	1	6.80
HSSW115	11.5	142	1	7.19
HSSW120	12.0	151	1	7.98
HSSW125	12.5	151	1	8.40
HSSW130	13.0	151	1	8.60

HSS REDUCED SHANK DRILL BITS

- ✔ For Drilling Into Alloyed Carbon And Plain Steel ✔ Hardwearing ✔ Ideal For Handheld Operations
- ✔ Allow For Drilling Larger Holes With Standard Drill Chucks
- ✔ Toughness And Precision Allow For Excellent Cutting Efficiency ✔ Twist Drill



Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSSRS14	14.0	160	5	12.49
HSSRS15	15.0	169	5	14.24
HSSRS16	16.0	178	3	16.88

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSSRS17	17.0	184	3	23.90
HSSRS18	18.0	191	3	25.88
HSSRS20	20.0	205	3	38.33



HSS LONG SHANK DRILL BITS



- For Drilling Into Alloyed Carbon And Plain Steel
- Hardwearing
- Ideal For Handheld Operations
- Long Shank Enables Deeper Drilling Capability
- Toughness And Precision Allow For Excellent Cutting Efficiency
- Twist Drill

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each	Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
HSSLS030	3.0	100	1	2.79	HSSLS048	4.8	132	1	5.13
HSSLS032	3.2	100	1	3.00	HSSLS050	5.0	132	1	4.42
HSSLS035	3.5	112	1	3.17	HSSLS060	6.0	139	1	5.50
HSSLS040	4.0	119	1	3.50	HSSLS080	8.0	165	1	8.33

HSS DRILL BIT CASES



- HSS For Drilling Into Alloyed Carbon And Plain Steel
- Cobalt For Drilling Into High Alloyed Steels, Bearing Steels, Hot/Cold Rolled Steel, And Stainless Steel

Part Number	Description	Price £ Per Each
HSSTM06	6 Piece HSS Set - 2 - 8mm in Plastic Case	17.14
HSSTM10	10 Piece HSS Set - 1 - 10mm in Plastic Case	26.06
HSSKM19	19 Piece HSS Set - 1 - 10mm in Metal Case	29.00
HSSKM25	25 Piece HSS Set - 1 - 13mm in Metal Case	57.66
COBKM19	19 Piece HSS Cobalt Set - 1 - 10mm in Metal Case	97.08
COBKM25	25 Piece HSS Cobalt Set - 1 - 13mm in Metal Case	139.46



HSSTM06



HSSTM10



HSSKM19



HSSKM25



COBKM19



COBKM25

HSS COUNTERSINK DRILL BITS



- For Countersinking And Deburring Of Steels
- Three 90° Cutting Edges
- Used To Ensure Flat Headed Screws Sit Flush

Part Number	Description	Price £ Per Each
HSSCS0803	8.3mm (M4)	14.51
HSSCS1004	10.4mm (M5)	16.05
HSSCS1204	12.4mm (M6)	18.31
HSSCS1605	16.5mm (M8)	23.77
HSSCS2005	20.5mm (M10)	30.33
HSSCS2500	25.0mm (M12)	37.80



COBALT COUNTERSINK DRILL BITS

- For Countersinking And Deburring Of Steels
- Three 90° Cutting Edges
- Cobalt Alloy
- Particularly Suited For Use On Stainless Steel
- Used To Ensure Flat Headed Screws Sit Flush

Part Number	Diameter	Price £ Per Each
COBCS0803	8.3mm (M4)	18.47
COBCS1004	10.4mm (M5)	21.90
COBCS1204	12.4mm (M6)	23.35
COBCS1605	16.5mm (M8)	28.71
COBCS2005	20.5mm (M10)	39.25
COBCS2500	25.0mm (M12)	52.75
COBCS3100	31.0mm (M16)	80.90



COBALT SLOTTED COUNTERSINK DRILL BITS

- For Countersinking And Deburring Of Steels
- Three 90° Cutting Edges
- Particularly Suited For Use On Stainless Steel
- Used To Ensure Flat Headed Screws Sit Flush
- Spoil Is Removed Through The Centre Of The Cutter To Prevent Damage To Tool

Part Number	Diameter	Price £ Per Each
COBSL0205	M2-M5 90°	18.78
COBSL0510	M5-M10 90°	25.61



MULTIDRILL TUNGSTEN CARBIDE UNIVERSAL DRILL BITS

- For Drilling Into Various Materials
- Universal And Versatile
- Four Step Profile For Fast Dust Extraction
- Carbide Tip
- Precise Drilling

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
MUL040075	4.0	75	1	6.62
MUL050085	5.0	85	1	6.81
MUL050150	5.0	150	1	7.83
MUL055085	5.5	85	1	6.91
MUL055150	5.5	150	1	8.68
MUL060100	6.0	100	1	6.98
MUL060200	6.0	200	1	8.27
MUL065100	6.5	100	1	7.08
MUL065200	6.5	200	1	10.07
MUL070100	7.0	100	1	8.12
MUL070200	7.0	200	1	10.84
MUL080120	8.0	120	1	8.79
MUL080200	8.0	200	1	10.84
MUL100120	10.0	120	1	10.09
MUL100200	10.0	200	1	12.60
MUL120220	12.0	220	1	13.84
MUL140220	14.0	220	1	15.72
MULSET	4,5,6,8,10	-	1	29.75





AUGER DRILL BITS **NEW**

- ✔ For Drilling Into Wood
- ✔ The Screw Tip Keeps The Drill Bit Accurate Throughout The Drilling
- ✔ Hexagon Shank For Improved Hold In The Drill Chuck
- ✔ A Spiral-Shaped Bit With A Threaded Tip At The Front And Two Chisels At Each Tip End

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
AUG06230	6.0	230	1	1.78
AUG08230	8.0	230	1	1.87
AUG08460	8.0	460	1	3.16
AUG10230	10.0	230	1	2.19
AUG10460	10.0	460	1	3.61
AUG12230	12.0	230	1	2.68
AUG12460	12.0	460	1	4.42
AUG13230	13.0	230	1	2.80
AUG14230	14.0	230	1	3.00
AUG14460	14.0	460	1	5.39
AUG16230	16.0	230	1	3.57
AUG16460	16.0	460	1	6.61

Part Number	Diameter mm	Overall Length mm	Pack Quantity	Price £ Per Each
AUG18230	18.0	230	1	4.06
AUG18460	18.0	460	1	7.66
AUG19230	19.0	230	1	5.19
AUG20230	20.0	230	1	4.95
AUG20460	20.0	460	1	9.25
AUG22230	22.0	230	1	5.76
AUG25230	25.0	230	1	6.25
AUG25460	25.0	460	1	12.77
AUG28230	28.0	230	1	8.64
AUG30230	30.0	230	1	9.45
AUG32230	32.0	230	1	10.42



FLAT WOOD BITS

- ✔ For Drilling Larger Holes Into Wood, Rapidly
- ✔ Available Up To 38mm
- ✔ The Centre Spur Keeps The Drill Bit Accurate Throughout The Drilling

Part Number	Diameter mm	Overall Length mm	Price £ Per Each
FW06	6.0	158	1.54
FW08	8.0	158	1.54
FW10	10.0	158	1.54
FW12	12.0	158	1.83
FW13	13.0	158	1.83
FW14	14.0	158	2.08
FW16	16.0	158	2.08
FW18	18.0	158	2.08
FW19	19.0	158	2.08

Part Number	Diameter mm	Overall Length mm	Price £ Per Each
FW20	20.0	158	2.25
FW22	22.0	158	2.29
FW24	24.0	161	2.42
FW25	25.0	161	2.42
FW28	28.0	161	3.17
FW30	30.0	174	3.17
FW32	32.0	174	3.46
FW35	35.0	174	4.04
FW38	38.0	174	4.13



CENTRE SPUR WOOD BITS

- ✔ For Drilling Holes Into Softwood And Plywood
- ✔ Cuts A Clean-Sided Hole
- ✔ The Centre Spur Keeps The Drill Bit Accurate Throughout The Drilling

Part Number	Diameter mm	Overall Length mm	Price £ Per Each
TP03	3.0	60	1.00
TP04	4.0	70	1.00
TP05	5.0	85	1.04
TP06	6.0	90	1.13
TP07	7.0	105	1.29

Part Number	Diameter mm	Overall Length mm	Price £ Per Each
TP08	8.0	110	1.33
TP09	9.0	115	1.50
TP10	10.0	120	1.71
TP12	12.0	140	2.38



TORX DRIVER BITS

- ✔ Torx Drive Enables Higher Torque Transmission Than Other Drive Systems
- ✔ Torx Drive Helps Prevent Cam out

Part Number	Pack Quantity	Price £ Per Each
T25	1	0.33
T30	1	0.42
T40	1	0.50

Part Number	Pack Quantity	Price £ Per Each
T45	1	0.58
T50	1	0.67

NO.1 FOR QUALITY, SERVICE AND VALUE

THE COMPLETE WHOLESALE SOLUTION

Owlett-Jaton is the UK and Ireland's leading wholesale supplier of fasteners, fixings, and associated products to the distributor and merchant trade.

“DELIVERING CONTINUALLY HIGH SERVICE LEVELS, OWLETT-JATON HAS AN ENVIABLE REPUTATION FOR HIGH-QUALITY PRODUCTS AND UNRIVALLED CUSTOMER SERVICE.”



 BOLTING

 WOODSCREWS

 NUTS

 WASHERS

 SOCKET SCREWS

 NAILS

 STUDDING

 FIXINGS

 RIVETS

 IRONMONGERY

 HARDWARE

 ABRASIVES



NEXT-DAY
DELIVERY



LARGEST
STOCKHOLDER



GREAT
BRANDS



OVER 30,000
PRODUCTS



Owlett-Jaton

owlett-jaton.com



Merchandising Solutions

-  HEAVY DUTY ANCHORS
-  MEDIUM DUTY ANCHORS
-  LIGHT DUTY ANCHORS
-  CHEMICAL ANCHORS
-  SELF-DRILLING SCREWS
-  NYLON AND CAVITY FILLINGS

- ✔ Suitable for all JCP products
- ✔ Striking Livery
- ✔ Multiple Configurations



KEEP YOUR STORE VIBRANT WITH OUR NEW MERCHANDISING SOLUTIONS

The JCP boxed, trade and retail bag range marry well, making for an eye-catching display. For more information on our new merchandising solutions, please contact your local sales office.

SUPPORTING YOU EVERY STEP OF THE WAY

Our Area Sales Managers have many years of experience in the field and are ready to work closely with our customers.

They can recommend and tailor a range of products that best suit your requirements.

Our Merchandising Representatives first assess the store area to be addressed, and from a selection of merchandisers determine which configuration works best, ensuring that products are available and engaging at the point of sale. They will oversee the building and positioning of the stands, along with loading them with stock.

Our after-sales support includes representatives making regular visits to replenish stock and ensure the display remains looking its best.



MAKING FIXINGS LOOK GREAT IN A RETAIL ENVIRONMENT



The Retail and Trade Bag Range

- ✓ Small Pack Sizes
- ✓ Striking Livory
- ✓ Best-Selling JCP Products



TRADE AND RETAIL PACKAGING

The JCP trade and retail packaging is full of information, making it user-friendly and enabling correct product selection and application. They also look great on our merchandising stands in a retail environment.

RETAIL

The retail range follows a similar offering to the trade bag range, conveniently packed in smaller quantities.



TRADE

The trade bag range covers popular products and sizes from the JCP range. The packaging is robust, re-sealable, drop-proof, water-resistant, easy to identify, and an ideal size to carry.



All products within the trade and retail range are categorised into one of four categories, with each product clearly colour coded on the front label.

 **HEAVY DUTY**

 **MEDIUM DUTY**

 **NYLON AND CAVITY**


 **SELF-DRILLING SCREWS**



The see-through bags allow for quick product identification whilst the image on the front clearly depicts its use. Clear instructions for installation can be found on the rear, along with extended technical details to aid in application.

JHANG/384


AWA Throughbolt
Clear Zinc Plated



	M8	M10	M12	M16
Drill Diameter (mm)	8	10	12	16
Thread Diameter	M8	M10	M12	M16
Hole Depth (mm)	60	80	70	90
Minimum Structure Thickness (mm)	100	100	110	120
Future Clearance Hole (mm)	9	12	14	18
Tightening Torque (Nm)	20	35	60	120

CE 14 | JCP Construction Products | E-16, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48, 49, 50, 51, 52, 53, 54, 55, 56, 57, 58, 59, 60, 61, 62, 63, 64, 65, 66, 67, 68, 69, 70, 71, 72, 73, 74, 75, 76, 77, 78, 79, 80, 81, 82, 83, 84, 85, 86, 87, 88, 89, 90, 91, 92, 93, 94, 95, 96, 97, 98, 99, 100

www.jcpfixings.co.uk



The labels feature a QR code which takes the customer to the product technical data sheet.

The label also shows base material icons which the product is recommended for.



Concrete

HEAVY DUTY RETAIL BAGS



ETA OPTION 7 THROUGH BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8100	M8 x 65	8	6	3.73
JB8103	M8 x 100	8	6	4.03
JB8106	M10 x 75	10	4	3.73
JB8109	M10 x 90	10	4	4.03
JB8112	M10 x 120	10	4	4.88
JB8115	M12 x 100	12	4	4.88
JB8118	M16 x 125	16	2	5.74



BRIGHT ZINC PLATED



Concrete

For additional technical information see page 13



HEXAGON FLANGE HEAD ANKER BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8300	6 x 50	6	6	3.03
JB8303	6 x 75	6	6	3.52
JB8306	6 x 100	6	4	3.52



BRIGHT ZINC PLATED



Concrete Solid Brick



Stone

For additional technical information see page 17



HEXAGON HEAD ANKER BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8309	8 x 60	8	4	3.52
JB8312	8 x 75	8	4	4.03
JB8315	8 x 100	8	4	4.88
JB8317	8 x 150	8	4	5.40
JB8318	10 x 75	10	4	5.32
JB8321	10 x 100	10	4	6.18
JB8324	10 x 150	10	2	5.32



BRIGHT ZINC PLATED



Concrete Solid Brick



Stone

For additional technical information see page 17



COUNTERSUNK HEAD ANKER BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8327	6 x 75	6	6	3.52
JB8330	6 x 100	6	4	3.73



BRIGHT ZINC PLATED



Concrete Solid Brick



Stone

For additional technical information see page 18



HOOK BOLTS BZP

- ✓ Fast And Secure Installation
- ✓ Expansion Free
- ✓ Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8332	6 x 50 (90mm overall)	6	2	4.03

For additional technical information see page 21



BRIGHT ZINC PLATED



EYE BOLTS BZP

- ✓ Fast And Secure Installation
- ✓ Expansion Free
- ✓ Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8333	6 x 50 (90mm overall)	6	2	4.03

For additional technical information see page 21



BRIGHT ZINC PLATED



HEXAGON FLANGE NUT SLEEVE ANCHORS ZYP


- ✓ Non-Cracked Concrete
- ✓ Supplied Pre-Assembled For Rapid Installation
- ✓ Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8200	8 x 85	8	6	3.52
JB8203	10 x 75	10	4	3.31
JB8206	10 x 100	10	4	3.73
JB8209	12 x 75	12	4	4.03
JB8212	12 x 100	12	4	4.46

For additional technical information see page 49



ZINC AND YELLOW PLATED



MEDIUM DUTY RETAIL BAGS



DROP IN ANCHORS ZYP

- ✓ Concrete C20/25 To C50/60
- ✓ Non-Cracked Concrete
- ✓ Minimum 5µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8272	M8 x 30	5	2.84
JB8275	M10 x 40	5	3.65

For additional technical information see page 22



ZINC AND YELLOW PLATED





LOOSE BOLT SHIELD ANCHORS ZYP

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Solid Brickwork
- Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8000	M6 x 10	12	10	5.74
JB8003	M6 x 25	12	10	6.18
JB8006	M8 x 10	14	6	5.32
JB8009	M8 x 25	14	6	5.74
JB8012	M8 x 40	14	6	6.18
JB8015	M10 x 10	16	4	5.74
JB8018	M10 x 25	16	4	6.18
JB8021	M10 x 50	16	4	6.61
JB8024	M10 x 75	16	4	7.47
JB8027	M12 x 10	20	2	4.88
JB8030	M12 x 25	20	2	5.32
JB88033	M12 x 60	20	2	6.18



ZINC AND YELLOW PLATED



Concrete Solid Brick

For additional technical information see page 52



PROJECTING BOLT SHIELD ANCHORS ZYP

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Solid Brickwork
- Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8039	M6 x 10	12	6	4.03
JB8042	M8 x 15	14	6	5.74
JB8045	M8 x 80	14	4	5.32
JB8048	M10 x 30	16	4	6.61
JB8051	M10 x 70	16	4	7.47
JB8054	M12 x 50	20	2	5.74



ZINC AND YELLOW PLATED



Concrete Solid Brick

For additional technical information see page 53



EYE BOLTS SHIELD ANCHORS ZYP

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Minimum 5µm

Part Number	Size	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8060	M8 Eye Bolt	14	4	6.61



ZINC AND YELLOW PLATED



Concrete Solid Brick

For additional technical information see page 53



COUNTERSUNK HEAD CONCRETE SCREWS NO COVER CAPS ZYP

- Locking Ribs Under Head
- Undercutting Action
- Minimum 5µm

Part Number	Screw Length mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8700	60	6	20	4.03
JB8703	80	6	20	5.32
JB8706	100	6	20	5.74
JB8709	120	6	10	4.46
JB8712	150	6	10	5.32



ZINC AND YELLOW PLATED



Concrete/Concrete Block Brick/Stone/Masonry

For additional technical information see page 55

NYLON AND CAVITY RETAIL BAGS




COUNTERSUNK HEAD NYLON HAMMER SCREWS ZYP

- ✔ For Use In Concrete And Masonry
- ✔ Ideal For Fast Fixing Repetitive Applications
- ✔ Countersunk Head Gives A Flush Finish

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8427	6 x 40	6	20	2.87
JB8430	6 x 60	6	20	3.16
JB8433	8 x 80	8	10	3.31
JB8436	8 x 100	8	10	4.03
JB8439	8 x 120	8	10	4.46



ZINC AND YELLOW PLATED



For additional technical information see page 74




COUNTERSUNK NYLON FRAME FIXINGS ZYP

- ✔ For Use In Solid Base Materials
- ✔ Countersunk Head Gives A Flush Finish
- ✔ Strong Grip In Weaker Materials

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8400	8 x 60	8	10	3.16
JB8403	8 x 80	8	10	3.52
JB8406	8 x 100	8	10	4.03
JB8409	8 x 120	8	10	4.46
JB8412	10 x 100	10	6	4.03
JB8415	10 x 120	10	6	4.46
JB8418	10 x 140	10	6	4.88
JB8421	10 x 160	10	6	5.32



ZINC AND YELLOW PLATED




For additional technical information see page 76



NYLON WALL PLUGS

- ✔ For Use In Solid Base Materials
- ✔ Suitable For Wood And Chipboard Screws
- ✔ 2 Way Expansion
- ✔ Screw Guidance
- ✔ Rimless

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8509	6	6	40	3.03
JB8512	8	8	40	3.52
JB8515	10	10	20	3.73




For additional technical information see page 78



UNIVERSAL WALL PLUGS

- ✔ Use In Solid Or Hollow Base Materials

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8521	6 x 40	6	40	3.52
JB8524	8 x 50	8	40	4.46




For additional technical information see page 78



JCP PREMIUM PLASTIC PLUGS

- ✔ Supplied On A Sprue
- ✔ For Use In Concrete And Masonry Base Materials
- ✔ Suitable For Wood And Chipboard Screws

Part Number	Colour	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8500	Red	6	50	2.74
JB8503	Brown	7	50	2.87




For additional technical information see page 80



ROSETT CAVITY FIXINGS

- ✔ Single And Double Skin Plasterboard Options Available
- ✔ Heavy Duty
- ✔ 30% Glass Fibre Re-Enforced Thread
- ✔ Minimum 5µm

Part Number	Description	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8600	Blue Rosett M5 x 55mm	10	6	5.74
JB8603	Blue Rosett M5 x 80mm	10	6	5.74
JB8606	Red Rosett M5 x 65mm	10	6	5.74
JB8609	Red Rosett M5 x 90mm	10	6	5.74




For additional technical information see page 81



J-PLUG PLASTERBOARD FIXINGS

- ✔ Comes Complete With Screw
- ✔ Self-Drilling
- ✔ Compatible with Hand or Power Screwdrivers

Part Number	Description	Quantity Per Bag	Price £ Per Bag
JB8615	Metal Plasterboard Fixing up to 15mm	6	2.59
JB8618	Metal Plasterboard Fixing up to 15mm	20	4.88
JB8621	Nylon Plasterboard Fixing up to 10mm	6	2.59
JB8624	Nylon Plasterboard Fixing up to 10mm	20	4.88




For additional technical information see page 81



PLASTERBOARD PLUGS

- ✔ Short Length Ideal For Dry Lined Walls
- ✔ Flange Head Prevents Push Through

Part Number	Description	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8663	Plasterboard Plug	7	20	3.73





HOLLOW WALL ANCHORS ZYP

- ✔ Provides A Strong, Permanent Anchorage To Plasterboard And Other Partition Materials
- ✔ Five Way Expansion ✔ All Metal Expanding Cavity Anchor ✔ Anti-Rotation Lugs
- ✔ Flange Head ✔ Complete With Pan Head Screws

Part Number	Description	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8630	M4 x 45mm 8-13mm wall thickness	7	10	3.31
JB8633	M5 x 45mm 5-10mm wall thickness	9	10	4.03
JB8634	M5 x 60mm 5-13mm wall thickness	9	10	4.28
JB8636	M6 x 60mm 7-13mm wall thickness	10	10	4.88



ZINC AND YELLOW PLATED



Plasterboard/
Partition Materials



Hollow Block/
Clay Pots

For additional technical information see page 82



SPRING TOGGLES ZYP

- ✔ Can Be Used In Virtually Any Cavity Or Blind Fixing Situation From Hardboard To Hollow Steel Sections
- ✔ Various Sizes To Suit Different Wall Thicknesses ✔ Complete With Screws

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8642	M5 x 50	14	6	3.52
JB8645	M5 x 75	14	6	4.03
JB8648	M6 x 75	18	6	4.46



ZINC AND YELLOW PLATED



Plasterboard/
Partition Materials



Hollow Block/
Clay Pots

For additional technical information see page 83



PLASTIC TOGGLES

- ✔ For Use In Hollow And Cavity Applications ✔ Quick And Easy To Apply
- ✔ Use With Standard Woodscrew ✔ Light Duty Applications

Part Number	Wall Thickness mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8654	4-12	10	20	3.73
JB8657	15-19	10	20	4.03



Plasterboard/
Partition Materials



Hollow Block/
Clay Pots

For additional technical information see page 83

SELF-DRILLING SCREWS RETAIL BAGS

PLASTIC HEADED NAILS



- Available With Black Or White Heads To Match Soffit
- HDPE Impact Resistant Poly Head
- Ring Shanked
- UV Factor 5 Stabilised
- Maintenance Free
- Suitable For External Use And Marine Environments

A4-316
STAINLESS STEEL

Part Number	Colour	Size mm	Quantity Per Bag	Price £ Per Bag
JB8931	Black	2 x 30	25	2.96
JB8934	Black	2 x 40	25	3.19
JB8937	White	2 x 30	25	2.96
JB8940	White	2 x 40	25	3.19



For additional technical information see page 68

MASONRY NAILS



- Hardened And Tempered
- Manufactured From Austempered High Carbon Steel
- Versatile Nail Set By Hammer
- Oil Bathed
- Countersunk Head

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
LIGHT SHANK			
JB8900	2.5 x 25	30	2.30
JB8903	2.5 x 60	25	2.30
JB8906	2.5 x 40	20	2.30
MEDIUM SHANK			
JB8909	3.0 x 50	14	2.30
JB8912	3.0 x 60	12	2.30
JB8915	3.5 x 75	7	2.30



For additional technical information see page 69

BASIN FIXINGS



- Complete With Cover Caps

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8945	10 x 140	14	2	4.03



For additional technical information see page 69

W.C FIXINGS



- Complete With Cover Caps

Part Number	Colour	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8948	White	6 x 70	8	2	3.16
JB8951	Chrome	6 x 70	8	2	3.16



For additional technical information see page 70



COUNTERSUNK HEAD WALL SCREWS


- Bright Zinc Plated Finish
- Fast And Secure Installation

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8953	5 x 32	5	20	2.49
JB8956	5 x 38	5	20	2.80
JB8959	5 x 50	5	20	3.11

For additional technical information see page 71



STEEL



PAN HEAD WALL SCREWS

- Bright Zinc Plated Finish
- Fast And Secure Installation

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JB8962	5 x 32	5	20	2.74
JB8965	5 x 38	5	20	3.08
JB8968	5 x 50	5	20	3.42

For additional technical information see page 71



STEEL



BIGTWIST NAILS


- Unique One Piece Stress Free Fixing
- No Need For Screws
- Grade 8.8 High Tensile Steel
- Rotates During Installation To Reduce The Risk Of Splitting Timber

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8921	8 x 165	10	9.91
JB8924	8 x 195	10	11.07

For additional technical information see page 72



BRIGHT ZINC PLATED



LIGHT SECTION

METALFIX SELF-DRILLING SCREWS BZP

- For Fixing Steel To Steel
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8815	5.5 x 25	30	3.73
JB8818	5.5 x 38	30	4.03
JB8821	5.5 x 50	30	4.46

For additional technical information see page 56



BRIGHT ZINC PLATED





LIGHT SECTION

HEAVY SECTION

METALFIX SELF-DRILLING SCREWS WITH 16MM WASHER BZP

- For Fixing Steel To Steel
- Supplied With 16mm Washer
- EPDM Washer To Prevent Water Ingress
- For General Purpose Applications
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
LIGHT SECTION			
JB8800	5.5 x 25	30	4.03
JB8803	5.5 x 32	30	4.46
JB8806	5.5 x 38	20	3.73
JB8809	5.5 x 50	20	4.46
HEAVY SECTION			
JB8827	5.5 x 32	20	3.73
JB8830	5.5 x 40	20	4.03
JB8833	5.5 x 50	20	4.46



BRIGHT ZINC PLATED



Steel Sections

For additional technical information see page 57



HEAVY SECTION

METALFIX LOOSE WASHERS BZP

- For Use With Self-Drilling Screws
- 1mm Steel With A 2mm Bonded EPDM Backing
- Creates A Watertight Seal

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8839	16	50	3.03
JB8842	19	50	3.52




BRIGHT ZINC PLATED



Steel Sections

For additional technical information see page 58



LIGHT SECTION

HEAVY SECTION

WOODFIX SELF-DRILLING SCREWS BZP

- For Fixing Timber To Steel
- Countersunk Head Gives Flush Finish
- DIN 7504P
- Wings Drill A Clearance Hole To Prevent The Timber Jacking
- C1022 Steel Case Hardened
- Minimum 8µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
LIGHT SECTION			
JB8863	5.5 x 40	30	3.73
JB8866	5.5 x 50	30	4.03
JB8869	5.5 x 60	20	3.52
JB8872	5.5 x 80	20	4.46
JB8875	5.5 x 100	20	5.74
HEAVY SECTION			
JB8881	5.5 x 60	20	3.18
JB8884	5.5 x 85	20	4.21
JB8887	5.5 x 109	20	5.22



BRIGHT ZINC PLATED



Steel Sections



Timber

For additional technical information see page 59




METALFIX GASH POINT SELF-DRILLING SCREWS BZP

- ✔ For Fixing Steel To Timber
- ✔ Supplied With 16mm Washer
- ✔ EPDM Washer To Prevent Water Ingress
- ✔ Gash Point For Quick Penetration
- ✔ Hexagon Head
- ✔ Sharp Threads Ensure A Low Torque And Strong Fixing
- ✔ Minimum 8µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8848	6.3 x 32	30	4.46
JB8851	6.3 x 45	30	5.32



BRIGHT ZINC PLATED



For additional technical information see page 59



METALFIX STITCHING SCREWS BZP

- ✔ For Joining Two Thin Sheets of Steel
- ✔ Supplied With 16mm Washer
- ✔ EPDM Washer To Prevent Water Ingress
- ✔ Hexagon Head
- ✔ DIN 7504K
- ✔ Larger Diameter To Give Better Grip In Steel
- ✔ Minimum 8µm

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8857	6.3 x 25	30	4.03



BRIGHT ZINC PLATED



For additional technical information see page 60



WAFER HEAD SELF-DRILLING SCREWS BZP

- ✔ For Fixing Steel To Steel
- ✔ Low Profile Wafer Head For Larger Bearing Surface
- ✔ Sharp Point Designed To Penetrate Effectively
- ✔ Fine Thread Ensures Strong Connection

Part Number	Size mm	Quantity Per Bag	Price £ Per Bag
JB8893	4.2 x 13	30	2.45



BRIGHT ZINC PLATED



For additional technical information see page 61



METALFIX MAGNETIC SOCKETS

- ✔ Magnetic To Hold Screw In Place
- ✔ 5/16" AF

Part Number	Size "	Quantity Per Bag	Price £ Per Bag
JB8899	5/16	1	4.03



HEAVY DUTY TRADE BAGS



ETA OPTION 7 THROUGH BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3042	M8 x 50	8	40	13.89
JP3045	M10 x 100	10	18	13.89
JP3048	M12 x 100	12	12	13.89
JP3051	M12 x 140	12	10	13.89
JP3054	M12 x 180	12	8	13.89



BRIGHT ZINC PLATED



Concrete

For additional technical information see page 13



HEXAGON FLANGE HEAD ANKER BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3066	5 x 50	5	64	15.73
JP3069	6 x 50	6	30	15.73
JP3072	6 x 75	6	26	15.73
JP3075	6 x 100	6	20	15.73



BRIGHT ZINC PLATED



Concrete



Solid Brick



Stone

For additional technical information see page 17



HEXAGON HEAD ANKER BOLTS BZP

- Concrete C20/25 To C50/60
 Non-Cracked Concrete
 Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3078	8 x 60	8	18	15.73
JP3081	8 x 75	8	14	15.73
JP3084	8 x 100	8	12	15.73
JP3087	8 x 150	8	8	15.73
JP3090	10 x 75	10	12	15.73
JP3093	10 x 100	10	8	15.73
JP3096	10 x 130	10	6	15.73
JP3099	10 x 150	10	6	15.73



BRIGHT ZINC PLATED



Concrete



Solid Brick



Stone

For additional technical information see page 17

MEDIUM DUTY TRADE BAGS



LOOSE BOLT SHIELD ANCHORS ZYP

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Solid Brickwork
- Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3147	M6 x 10	12	48	17.59
JP3150	M6 x 25	12	46	17.59
JP3153	M8 x 10	14	26	17.59
JP3156	M8 x 25	14	26	17.59
JP3159	M8 x 40	14	22	17.59
JP3162	M10 x 10	16	22	17.59
JP3165	M10 x 25	16	116	17.59
JP3168	M10 x 50	16	14	17.59
JP3171	M10 x 75	16	14	17.59
JP3174	M12 x 60	20	10	17.59

For additional technical information see page 52



ZINC AND YELLOW PLATED



Concrete Solid Brick



PROJECTING BOLT SHIELD ANCHORS ZYP

- Non-Cracked Concrete C20/25 To C50/60
- Solid Concrete Blocks
- Solid Brickwork
- Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3177	M10 x 30	16	15	17.59

For additional technical information see page 53



ZINC AND YELLOW PLATED



Concrete Solid Brick



COUNTERSUNK HEAD CONCRETE SCREWS-NO COVER CAPS

- Locking Ribs Under Head
- Undercutting Action
- Minimum 5µm

Part Number	Screw Length mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3030	80	6	65	11.11
JP3033	100	6	55	11.11
JP3036	120	6	45	11.11
JP3039	150	6	30	11.11

For additional technical information see page 55



ZINC AND YELLOW PLATED



Concrete/Concrete Block Brick/Stone/Masonry

NYLON AND CAVITY TRADE BAGS



COUNTERSUNK HEAD NYLON HAMMER SCREWS ZYP

- For Use In Concrete And Masonry
- Ideal For Fast Fixing Repetitive Applications
- Countersunk Head Gives A Flush Finish

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3018	6 x 40	6	135	7.83
JP3021	6 x 60	6	100	7.83
JP3024	8 x 80	8	50	7.83
JP3027	8 x 100	8	40	7.83

For additional technical information see page 74



ZINC AND YELLOW PLATED



Concrete/Concrete Block Solid Brick



Stone



COUNTERSUNK NYLON FRAME FIXINGS ZYP


- ✓ For Use In Solid Base Materials
- ✓ Countersunk Head Gives A Flush Finish
- ✓ Strong Grip In Weaker Materials

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3000	8 x 80	8	50	7.83
JP3003	8 x 100	8	40	7.83
JP3006	10 x 100	10	30	7.83
JP3009	10 x 120	10	25	7.83
JP3012	10 x 140	10	20	7.83
JP3015	10 x 160	10	15	7.83

For additional technical information see page 76



ZINC AND YELLOW PLATED




NYLON WALL PLUGS

- ✓ For Use In Solid Base Materials
- ✓ Suitable For Wood And Chipboard Screws
- ✓ 2 Way Expansion
- ✓ Screw Guidance
- ✓ Rimless

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3180	6	6	200	4.60
JP3183	8	8	100	4.60
JP3186	10	10	70	4.60

For additional technical information see page 78



J-PLUG METAL PLASTERBOARD FIXINGS

- ✓ Comes Complete With Screw
- ✓ Self-Drilling
- ✓ Compatible With Hand Or Power Screwdrivers

Part Number	Size	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3057	Up to 15mm	N/A	75	13.89

For additional technical information see page 81




ROSETT CAVITY FIXINGS

- ✓ Heavy Duty
- ✓ 30% Glass Fibre Re-Enforced Thread
- ✓ Minimum 5µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3063	M5 x 55	10	10	13.89

For additional technical information see page 81



HOLLOW WALL ANCHORS ZYP


- ✓ Provides A Strong, Permanent Anchorage To Plasterboard And Other Partition Materials
- ✓ Five Way Expansion
- ✓ All Metal Expanding Cavity Anchor
- ✓ Anti-Rotation Lugs
- ✓ Flange Head
- ✓ Complete With Pan Head Screws

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3060	M6 x 60	10	40	13.89

For additional technical information see page 82



ZINC AND YELLOW PLATED



SELF-DRILLING SCREWS TRADE BAGS



COUNTERSUNK HEAD WALL SCREWS

- Bright Zinc Plated Finish
- Fast And Secure Installation

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3192	5 x 32	5	100	10.26
JP3195	5 x 38	5	100	10.95
JP3198	5 x 50	5	100	11.63

For additional technical information see page 71



STEEL

Concrete/
Concrete Block

Solid/Hollow
Brick

Wood/
Wall-Board

Stone



PAN HEAD WALL SCREWS

- Bright Zinc Plated Finish
- Fast And Secure Installation

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3201	5 x 32	5	100	10.26
JP3204	5 x 38	5	100	10.95
JP3207	5 x 50	5	100	11.63

For additional technical information see page 71



STEEL

Concrete/
Concrete Block

Solid/Hollow
Brick

Wood/
Wall-Board

Stone



METALFIX SELF-DRILLING SCREWS BZP

- For Fixing Steel To Steel
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3108	5.5 x 25	N/A	200	15.73
JP3111	5.5 x 32	N/A	160	15.73
JP3114	5.5 x 38	N/A	150	15.73
JP3117	5.5 x 50	N/A	150	15.73

LIGHT SECTION

For additional technical information see page 56



BRIGHT ZINC PLATED

Light Steel
Sections



METALFIX SELF-DRILLING SCREWS WITH 16MM WASHER BZP

- For Fixing Steel To Steel
- Supplied With 16mm Washer
- EPDM Washer To Prevent Water Ingress
- For General Purpose Applications
- Hexagon Head
- DIN 7504K
- C1022 Steel Case Hardened
- Minimum 8µm

Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
LIGHT SECTION				
JP3120	5.5 x 25	N/A	140	15.73
JP3123	5.5 x 38	N/A	110	15.73
JP3126	5.5 x 50	N/A	85	15.73
HEAVY SECTION				
JP3129	5.5 x 40	N/A	100	15.73
JP3130	5.5 x 60	N/A	140	15.73
JP3131	5.5 x 70	N/A	140	15.73
JP3210	5.5 x 80	N/A	140	15.73
JP3133	5.5 x 100	N/A	100	15.73
JP3134	5.5 x 120	N/A	100	15.73

LIGHT SECTION



HEAVY SECTION

For additional technical information see page 57



BRIGHT ZINC PLATED


Steel
Sections



WOODFIX SELF-DRILLING SCREWS BZP

- ✔ For Fixing Timber To Steel
- ✔ Countersunk Head Gives Flush Finish
- ✔ DIN 7504P
- ✔ Wings Drill A Clearance Hole To Prevent The Timber Jacking
- ✔ C1022 Steel Case Hardened
- ✔ Minimum 8µm

BRIGHT ZINC PLATED



Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
LIGHT SECTION				
JP3135	5.5 x 40	N/A	100	15.73
JP3138	5.5 x 50	N/A	100	15.73
JP3141	5.5 x 60	N/A	100	15.73
JP3144	5.5 x 80	N/A	100	15.73
JP3146	5.5 x 120	N/A	100	15.73
HEAVY SECTION				
JP3230	5.5 x 120	N/A	100	15.73



LIGHT SECTION

For additional technical information see page 59


HEAVY SECTION



METALFIX GASH POINT SELF-DRILLING SCREWS BZP

- ✔ For Fixing Steel To Timber
- ✔ Supplied With 16mm Washer
- ✔ EPDM Washer To Prevent Water Ingress
- ✔ Gash Point For Quick Penetration
- ✔ Hexagon Head
- ✔ Sharp Threads Ensure A Low Torque And Strong Fixing
- ✔ Minimum 8µm

BRIGHT ZINC PLATED



Part Number	Size mm	Drill Diameter	Quantity Per Bag	Price £ Per Bag
JP3102	6.3 x 32	N/A	120	15.73
JP3105	6.3 x 45	N/A	90	15.73



For additional technical information see page 59



METALFIX STITCHING SCREWS BZP

- ✔ For Joining Two Thin Sheets Of Steel
- ✔ Supplied With 16mm Washer
- ✔ EPDM Washer To Prevent Water Ingress
- ✔ Hexagon Head
- ✔ DIN 7504K
- ✔ Larger Diameter To Give Better Grip In Steel
- ✔ Minimum 8µm

BRIGHT ZINC PLATED



Part Number	Size mm	Drill Diameter mm	Quantity Per Bag	Price £ Per Bag
JP3132	6.3 x 25	N/A	120	15.73



For additional technical information see page 60



INDEX

Alloy Nail In Anchors.....	67	Hexagon Bolt Heavy Duty Anchors	27-29	Polyurethane Cleaner.....	48
Alpen Drill Bits	88-95	Hexagon Bolt Sleeve Anchors	50	Pozi Pan Head Self-Drilling Screws	58
Angle Brackets	70	Hexagon Flange Head Ankerbolts	17-18, 101, 111	Premium Nylon Wall Plugs	79
Ankerbolts	17-20, 101, 111	Hexagon Head Ankerbolts	17, 19, 101, 111	Projecting Bolt Shield Anchors	53, 103, 112
Ankerbolt Drop In Anchors.....	20	Hexagon Head Nylon Frame Fixings.....	77	Pure Epoxy Resin.....	34
Ankerbolt Drop In Setting Tool.....	20	Hexagon Flange Nut Sleeve Anchors.....	49, 50, 101	Push Plugs	78
Ankernuts	82	High Speed Steel Drill Bits	91-93	Road Fixing Kit	82
Applicator Guns.....	48	Hollow Wall Anchors	82, 106, 113	Rockite	37
Auger Drill Bits.....	95	Hollow Wall Anchor Setting Tool	83	Rosett Cavity Fixings.....	81, 105, 113
B1 Fire Sealant.....	46	Hook Bolts	21, 102	Round Perforated Fixing Band	73
B1 Rated Expanding Foam	46	Hook Bolt Shield Anchors.....	54	Sanitary Fixings	69, 70, 107
B2 Rated Expanding Foam	46	Hook Bolt Sleeve Anchors.....	51	Scaffold Eye Plugs.....	26
B3 Rated Expanding Foam	45	Hot Dipped Galvanised Throughbolts.....	14	Scaffold Retaining Eyes	26
Basin Fixings	69, 107	Hot Dipped Galvanised J-Fix Studs.....	39-40	Scaffold Ring Bolts	26
Bigtwist Nails	72, 108	HSS Cobalt High Speed Steel Drill Bits.....	92	SDS+ Drill Bits	88-90
Blind Bolts	30-32	HSS Countersink Drill Bits	93	SDS+ High Performance Drill Bits	89
Blow Out Pump.....	43	HSS Drill Bit Cases.....	93	SDS+ Drill Bit Sets	90
Brad Nails and Gas	85	HSS Long Shank Drill Bits	93	SDS Max Drill Bits	89
Bright Zinc Plated Ankerbolts	17-18, 101, 111	HSS Reduced Shank Drill Bits	92	Self-Drilling Screws	56-66, 107-108
Bright Zinc Plated Drop In Anchors	22	Imperial High Speed Steel Drill Bits.....	91	Setting Tool for Rod Hangers	66
Bright Zinc Plated Fibre Cement Screws	62	Injection Resin Internally Threaded Sockets	41	Shield Anchors.....	52-54, 103
Bright Zinc Plated Hammer Screws.....	74	Injection Tool Accessories	42	Shield Only Shield Anchors	53
Bright Zinc Plated Heavy Duty Anchors.....	27-28	Injection Tools	42	Shot Fired Pins	87
Bright Zinc Plated Internal Threaded Sockets	41	Internal Threaded Sockets	41-42	Sleeve Anchors.....	49-51, 102
Bright Zinc Plated J-Fix Studs	38	Intumescent and Acoustic Mastic.....	48	Socket Bolts	21
Bright Zinc Plated Metalfix.....	56-61	JCP Bulk Plastic Plugs	79	Spin In Capsules	37
Bright Zinc Plated Throughbolts	13, 101, 111	JCP Premium Plastic Plugs.....	80, 105	Spring Toggles.....	83, 106
Bright Zinc Plated Woodfix	59, 109	JCP Standard Plastic Plugs.....	79	Stainless Steel Brad Nails	85
Cartridge Strips.....	86	J-Fix Epoxy Acrylate Resin	36	Stainless Steel Clipped Head Drivefast Gas Nails	84
Cartridge Tool	86	J-Fix Hammer In Glass Capsules.....	37	Stainless Steel Heavy Duty Blind Bolts	32
Ceiling Hangers	86	J-Fix Polyester Resin.....	36	Stainless Steel A2 Eye Bolt Sleeve Anchors	51
Cementitious Grout.....	45	J-Fix Polyester Styrene Free Resin.....	36	Stainless Steel A2 Fixing Bands.....	73
Centre Spur Wood Bits.....	95	J-Fix Pure Epoxy Resin	34	Stainless Steel A2 Hammer Screws	75
Chemical Anchors and Accessories	34-48	J-Fix Spin In Glass Capsules	37	Stainless Steel A2 Internal Threaded Sockets	41
Cleaning Brushes	43	J-Fix Studs.....	38-41	Stainless Steel A2 J Fix Studs	40
Clipped Head Drivefast Gas Nails	84	J-Fix Ultra Bond 100 Epoxy Resin.....	34	Stainless Steel A2 Metalfix	62-64
Cobalt Countersink Drill Bits	94	J-Fix Vinylester Resin.....	34	Stainless Steel A2 Metalfix Stitching Screw	64
Cobalt Slotted Countersink Drill Bits	94	J-Fix Vinylester Fast Cure Winter Grade Resin.....	35	Stainless Steel A2 Sleeve Anchors.....	51
Coloured Cover Caps.....	64	J-Plug Plasterboard Fixings.....	81, 105, 113	Stainless Steel A2 Stitching Bar	45
Concrete Screws	54-55, 103, 112	Kwixset	38	Stainless Steel A2 Thin Wall Bolts	32
Concrete Screws Cover Caps	55	Light Duty Fixings	67-73	Stainless Steel A2 Throughbolts.....	14
Countersunk Head Ankerbolts.....	18, 19, 101	Lipped Drop In Anchors.....	23	Stainless Steel A4 Ankerbolts.....	19-20
Countersunk Head Hammer Screws	74-75	Loose Bolt Shield Anchors.....	52, 103	Stainless Steel A4 Blind Bolts.....	31-32
Countersunk Head Sleeve Anchors.....	50-51	Low Profile Metalfix Self-Drilling Screws	61	Stainless Steel A4 Drop In Anchors	23
Countersunk Head Wall Screws	71, 108, 114	Magazine Pins	87	Stainless Steel A4 Heavy Duty Anchors	28-29
Countersunk Heavy Duty Anchors.....	28-29	Magnetic Drive Sockets.....	61, 110	Stainless Steel A4 Internal Threaded Sockets	42
Countersunk Nylon Frame Fixing	76-77, 104, 113	Masonry Drill Bits	90	Stainless Steel A4 J-Fix Studs	40
Cover Caps.....	64	Masonry Drill Bit Sets	90	Stainless Steel A4 Lipped Drop In Anchors.....	23
Crack Stitch Twist Starter Kit	44	Masonry Nails	68-69, 107	Stainless Steel A4 Nylon Frame Fixings.....	77
Drill Bits	88-95	Masonry Nails with 8mm Washer	68	Stainless Steel A4 Shield Anchors	53
Drivefast Gas Nails.....	84	Mechanical Galvanised Ankerbolts.....	18-19	Stainless Steel A4 Sleeve Anchor	50
Drivefast Gas Only	85	Mechanical Galvanised Fixing Bands.....	73	Stainless Steel A4 Throughbolts.....	15
Drop In Anchors	22-23, 102	Medium Duty Anchors	49-54	Steel Nail In Anchors	67
Drop In Anchor Setting Punches	24	Metal Expansion Plugs	80	Stitching Bar	45
Dual Threaded and Single Thread Socket Bolts.....	21	Metal Nail In Anchors.....	67	Stop Drill Bits	24
Epoxy Acrylate Resin.....	36	Metalfix Self-Drilling Screws	56-66, 108-109, 114	Straight Perforated Fixing Band	73
ETA Approved Drop In Anchors.....	22-23	Metalfix Gash Point Self-Drilling Screws	59, 110	Straight Shank Masonry Drill Bit Sets.....	90
ETA Drop In Anchor Setting Punches.....	24	Metalfix High Thread Self-Drilling Screws	60	Straight Shank Masonry Drill Bits	90
ETA Approved Nylon Frame Fixings	76-77	Metalfix Horizontal Hangers	65	Stud and Nut Heavy Duty Anchors	28
ETA Dual Threaded Socket Bolts	21	Metalfix Loose Washers	58, 63, 109	Thin Wall Blind Bolts	32
ETA Option 1 Ankerbolts.....	19	Metalfix Magnetic Socket.....	61, 110	Throughbolts	12-15, 101
ETA Option 1 Heavy Duty Anchors.....	27-29	Metalfix Stitching Screws.....	60, 64, 110	Tool Kit PA97	86
ETA Option 1 Throughbolts.....	13, 15	Metalfix Vertical Hangers.....	65	TX Driver Bits	95
ETA Option 7 Throughbolts	13, 15, 101, 111	Mixer Nozzles	42	Universal Wall Plugs.....	78, 104
Expanding Foam	45-46	Mixing Paddle.....	44	Vertical Flange Clips	70
Eye Bolt Shield Anchors	53, 103	Multidril Tungsten Carbide Universal Drill Bits.....	94	Vinylester Fast Cure Resin.....	35
Eye Bolt Sleeve Anchors	51	Mushroom Head Nylon Hammer Screws	75	Vinylester Resin.....	34
Eye Bolts	21, 102	Nail In Anchors	67	Wafer Head Self-Drilling Screws	61, 110
Eye and Hook Bolt Sleeve Anchors	51	Nail In Sockets	16	Wall Screws.....	71, 108, 114
Fibre Cement Screws	62	Nylon and Cavity	74-83	W.C. Fixings	70, 107
Fire Stop Expanding Foam.....	46	Nylon Frame Fixings	76-77, 104, 113	Wirehangers	16
Fixing Bands	73	Nylon Hammer Screws.....	74, 104	Wire Cleaning Brushes.....	43
Flange Head Hammer Screws	74	Nylon Sleeves	43	Wire Mesh Sleeve	43
Flat Wood Bits	95	Nylon Toggles	83, 106	Woodfix Drive Bit	59
Forged Eye Bolts.....	25	Nylon Wall Plugs	78, 104, 113	Woodfix Self-Drilling Screws	59, 63, 109
Forged Hook Bolts	25	PA97 Cartridge Tool Kit	86	Zinc Nickel Thin Wall Blind Bolts	32
Galvanised Fixing Band.....	73	PA and Gas	84-87	Zinc and Yellow Plated Drop In Anchors.....	22-23, 102
Galvanised Angled Brads	85	Pan Head Ankerbolts.....	18	Zinc and Yellow Plated Hollow Wall Anchors	82, 105
Gash Point Horizontal Hangers.....	66	Pan Head Wall Screws	71, 108, 114	Zinc and Yellow Plated J-Fix Studs	39
Gash Point Vertical Hangers	66	Plain Ended J-Fix Studs	39-41	Zinc and Yellow Plated Nylon Frame Fixings	76, 104, 113
General Purpose Metalfix Self-Drilling Screws.....	58	Plasterboard Fixings	81, 105	Zinc and Yellow Plated Nylon Hammer Screws	74, 104, 112
Geomert 500B Blind Bolts	30-31	Plasterboard Plugs	105	Zinc and Yellow Plated Sleeve Anchors	49-50, 102
Glass Capsules	37	Plastic Headed Nails	68, 107	Zinc and Yellow Plated Spring Toggles.....	83, 106
Hammer In Capsules.....	37	Plastic Toggles	83, 106	Zinc and Yellow Plated Throughbolts	12
Hammer Screws	74-75, 104	Plastic Wall Plugs	78-80, 104-105		
Handi Pack Drivefast.....	85	Plastic Washered Pins.....	87		
Heavy Duty Anchors	12-29	Pointing Gun.....	44		
Heavy Duty Blind Bolts.....	31-32	Polyester Styrene Free Resin.....	36		
Heavy Duty Expansion Anchors	27-29	Polyester Resin	36		

TERMS AND CONDITIONS OF SALE

1. APPLICATION

Unless otherwise agreed in writing between the company and its customer, the following terms and conditions of sales shall apply to all sales of goods by the company to its customer.

2. PRICE VARIATION

Price applicable to the sales of goods by the company to the customer shall be the price ruling at the date of despatch. The company therefore reserves the right to amend prices quoted at the date of the placing of an order by the customer by notifying the customer in writing.

3. CARRIAGE

The Company reserves the right as part of this contract to impose such surcharge or carriage charge as shall be laid down by the company policy at any time. Such terms will be available for examination at the address of the company shown on the letterhead of its invoices and are deemed to be part of all contracts unless specifically agreed to the contrary in writing by the company. The company has sole choice of method of delivery and of carrier or carriers employed unless specifically agreed in writing to the contrary.

4. DESPATCH

Despatch dates are quoted without engagement although every endeavour will be made to adhere to the date or dates quoted. In no circumstances shall the company be liable for any loss arising from delay in despatch however caused. Time shall not be of the essence of the contract.

5. DAMAGE AND LOSS IN TRANSIT

5.1 The company accepts no liability for any damage to goods in transit unless notified to the company and the carrier concerned within twenty four hours after delivery.

5.2 In the case of non-delivery the company accepts no liability of any sort unless written notice of non-delivery is given to the company within seven days after the date of the advice of despatch of the goods.

5.3 Paragraphs one and two shall not apply to despatches to countries outside the United Kingdom of Great Britain, Northern Ireland and the Isle of Man. In respect of these countries the company accepts no liability for damage or loss in transit unless the company has contracted to supply the goods C.I.F. and the customer has adhered to the terms of the insurance policy.

5.4 The company's liability for damage in transit or non-delivery of goods duly notified to it in accordance with the above, shall in any event be limited solely to replacement of the goods within a reasonable time, whether non-delivery or damage is due to the company's negligence or otherwise.

6. CLAIMS

Subject to the provision of condition 5, all claims for goods alleged to be defective must be made in writing to the company within seven days after the date of delivery. When notification is so received the company may require return of the goods or for the goods to be made available for inspection by the company. Should the company be satisfied as to the defects then it retains the option to either replace the defective goods within a reasonable time or credit to the customer within the contract price. All defective goods so returned shall be the property of the company. Except as provided above, the company shall have no liability whatsoever arising out of any agreement to sell or sale of goods including claims for direct consequential or other loss, damage or expense, whether arising or alleged to arise under any warranty statement, conditional term expressed or implied, statutory or otherwise, or in negligence or alleged negligence on the part of the company or otherwise. In no circumstances shall the company be liable for loss or damage in excess of the contract sale price.

7. PASSING OF PROPERTY

Each of the following sub-clauses 7.1 to 7.6 are separate and severable and shall be enforceable accordingly:

7.1 Notwithstanding delivery, all goods supplied by us will remain our absolute property until you pay in full for them and for all other goods previously supplied by us;

7.2 You will store the goods in such a way that they are readily identifiable as our property, but you may, as trustees for us, sell them to a third party in the normal course of your business;

7.3 Upon any sale by you of the goods (either alone or with other items) all rights which you have against the buyer shall automatically vest in us;

7.4 We shall be entitled immediately after giving notice of our intention to repossess, to enter upon any premises with such transport as may be necessary and repossess any goods to which we have title under this Clause;

7.5 If you incorporate the goods we supply to you into other products with or without materials you already possess or which are supplied to you by third parties the property in such other product will pass to us and you shall store them without charge on our behalf as bailee;

7.6 You shall not be entitled to pledge or in any way charge by way of security any of the goods which remain our property but in the event you do so all moneys owing by you to us shall without prejudice to any other right or remedy available to us forthwith become due and payable.

8. PAYMENT

For the purpose of this Clause the due date shall mean the due date specified on the face of the invoice. Customers electing to pay by Direct Debit shall mean the 28th of the month following the month of the invoice. If you do not comply punctually with these terms of payment we reserve the right to charge you interest on any amount overdue at the rate of 1½% per month from the due date to the date of receipt of the monies outstanding, and without notice to suspend further deliveries until all arrears (including interest) have been paid and, at our option, to rescind any subsisting contract with you as to all or any parts of future deliveries but without prejudice to any rights already accrued to us under such contracts. Where a settlement discount is shown on the face of the invoice the customer may deduct this from his payment provided that payment in full less this discount is made by the due date.

9. ADDITIONAL DELIVERIES

Where the company has been obliged to make an additional delivery of the goods to the premises specified in the contract due to the failure of the customer to accept the delivery of the goods, the company reserves the right to make a charge for such additional delivery, unless the company failed to meet a specified time and date of delivery agreed in writing by the company and the customer. Any proposed delivery date specified on this invoice or on a sales order does not constitute such agreement in writing.

10. INTERPRETATION

Any agreement between the company and the purchaser shall be subject to and governed by the domestic law of England.

ABOUT US

Owlett-Jaton

The No. 1 choice for Quality, Service, and Value

Owlett-Jaton is the UK and Ireland's leading wholesale supplier of fasteners, fixings, and associated products to the distributor and merchant trade. Offering in excess of 30,000 product lines, we are also the largest stockholder in the industry.

Operating from a purpose-built warehouse in Stone, Staffordshire, our comprehensive stock line-up is backed by large stocks and efficient operations.

Our product range is the most comprehensive within our industry sector, and we understand that an important part of our offering is good stock availability, at all times. Our commitment to stock ensures products are available, competitively priced, for next-day delivery throughout most of the UK mainland.

FREE, NEXT-DAY DELIVERY WITH LOW MINIMUM ORDER LEVELS ACROSS THE MAJORITY OF THE UK MAINLAND.

We are the name behind some of the UK's leading fastener and fixing brands, including JCP, JRP, Thunderbolt, Unifix, and Vortex. With a comprehensive stock range in depth, volume, and continuity of supply, as well as a stock buying power that is unique to the market, we are recognised for offering the complete wholesale solution.

With over 30,000 product lines under one roof, customers can order multiple items, in small quantities, all from one supplier. For customers, this improves efficiency, provides cost savings, and enhances customer service levels.

Delivering continually high service levels, we have an enviable reputation for high-quality products and unrivalled customer service.

We take our service levels seriously and pride ourselves on our high levels of reliability, and lasting customer partnerships. With a network of sales offices and Area Sales Managers (ASM's), supported by our merchandising teams, customers have access to experienced staff, whilst online ordering provides visibility to pricing, stock availability, and more.

Our commitment to customer service and quality products is demonstrated by our ISO 9001:2015 Quality Management system. We are also dedicated to operating in an environmentally sustainable manner, and we are the first wholesaler in our industry to be awarded ISO 14001:2015 Environmental Management certification.

Owlett-Jaton is a trading division of Hexstone Ltd.

www.owlett-jaton.com

IMPLEMENTATION OF UKCA FOR CONSTRUCTION PRODUCTS

Owlett-Jaton

The Department for Levelling Up, Housing and Communities (DLUHC) is the Government Department responsible for Construction Products Regulation and the implementation of the new UKCA mark for construction products. In December 2022 they issued revised instructions on the implementation of UKCA for construction products.

Please note, the DLUHC requirements differ from advice on UKCA issued by the Department for Business, Energy and Industrial Strategy (BEIS) who are responsible for UKCA implementation on many other products. The DLUHC requirements need to be followed for construction products.

The new DLUHC information is:

- Products which have a valid CE marking will continue to be recognised as compliant until 30th June 2025.
- From 1st July 2025 products requiring certification in GB will need to have the UKCA mark, CE will no longer be recognised.
- Obtaining a UKCA mark will require the product to be tested in a UK facility and have the certification issued by a UK Conformity Assessment Body (CAB). Previous advice had been that the UK CAB's would be allowed to accept EU test results which had been prepared for CE certification.

With this change in the advice, Owlett-Jaton is working to ensure that products will continue to be available which meet all compliance requirements. It is our intention that all of our products currently CE marked will become dual marked with both CE and UKCA. This will allow our products to be compliant and sold in mainland GB, Northern Ireland and within the EU.

We have started a comprehensive programme of testing in the UK which should enable UKCA's to be issued for all of our products which are currently CE marked. We expect to complete this programme in the course of 2023. As UKCA's become available they will be applied to products alongside the existing CE marking and will be phased in as new stock arrives. The UKCA and CE product requirements are identical, the introduction of UKCA will not result in any physical or product code changes.

Ian Doherty
Chief Executive
January 2023

The relevant information from DLUHC can be found at:

<https://www.gov.uk/guidance/construction-products-regulation-in-great-britain#construction-products-regulation-in-great-britain>



Technical Office

Teddington
tel **020 8943 1800**
jcp@owlett-jaton.com

Sales Office

Stone
tel **01785 819819**
info@owlett-jaton.com

Sales Office

Dartford
tel **01322 277733**
dartford.sales@owlett-jaton.com

Sales Office

Elland
tel **01422 370121**
elland.sales@owlett-jaton.com

Sales Office

Milton Keynes
tel **01908 201600**
milton.keynes@owlett-jaton.com

Sales Office

Swindon
tel **01793 527829**
swindon.sales@owlett-jaton.com



[/jcpconstructionproducts](#)



Head Office

Opal Way, Stone Business Park, Stone, Staffordshire ST15 0SW • Tel 01785 811300

Technical Helpline 020 8943 1800 • jcp@owlett-jaton.com